

Oct 10/16

Cascade + Parallel Implementation of IIR Filters with Rational

Transfer Function:

Factoid: If coeffs of polynomial in one variable are real, then roots are either real or

They are complex conjugate.

→ If z_0 is root, then so is z_0^*

- Poly of deg 2: $\alpha z^2 + \beta z + \gamma$

B.T. real

→ pair of complex conjugate

- Poly of deg 3


$$\alpha z^3 + \beta z^2 + \gamma z + \delta$$

3 real roots
or one real and a pair of conjugate complex.

$$k(z-z_0)(z-z_1)(z-z_2)$$

~~Cannot have 2 real roots and one complex~~

- poly of deg 4: $\alpha z^4 + \beta z^3 + \gamma z^2 + \delta z + \kappa$

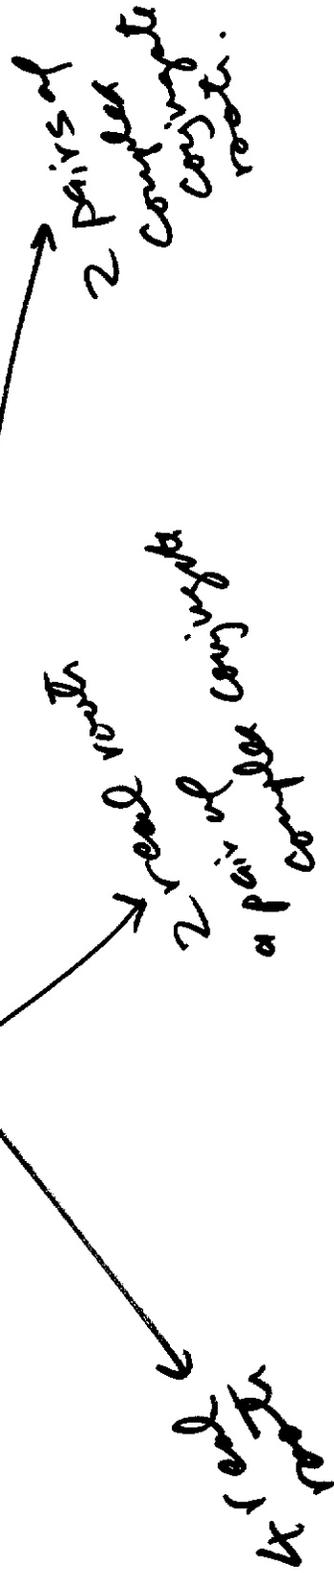

$$k(z-z_0)(z-z_1)(z-z_2)(z-z_3)$$

Conclusion: polynomial with real coeff

of odd degree always has a real root.

Claim: For a polynomial with real coeff.

↓ I can factor it this way:

$$P(z) = \prod_k (1 - c_k z^{-1}) \prod_k (1 - d_k^* z^{-1})$$

real.
complex.

$$\frac{\sum_{k=0}^{p-1} b_k z^{-k}}{1 - \sum_{k=1}^p a_k z^{-k}}$$

$$H(z) = A \frac{\prod_k (1 - e_k z^{-1}) \prod_k (1 - f_k^* z^{-1})}{\prod_k (1 - c_k z^{-1}) \prod_k (1 - d_k^* z^{-1})}$$

Note : $(1 - d_k \bar{z}^{-1})(1 - d_k^* z^{-1})$
 $= 1 + 2 \operatorname{Re}[d_k] \bar{z}^{-1} + |d_k|^2 z^{-2}$

p polynomial with real coeff.


$$= 1 + \beta_{1k} \bar{z}^{-1} + \beta_{2k} z^{-2}$$

Generic 2nd order

$$H_k(z) = A \prod_k H_k(z)$$


$$H_k(z) = \frac{1 + \beta_{1k} z^{-1} + \beta_{2k} z^{-2}}{1 - d_{1k} z^{-1} - d_{2k} z^{-2}} = \frac{Y(z)}{X(z)}$$

$\beta_{1k}, \beta_{2k}, d_{1k}, d_{2k}$ are all real.

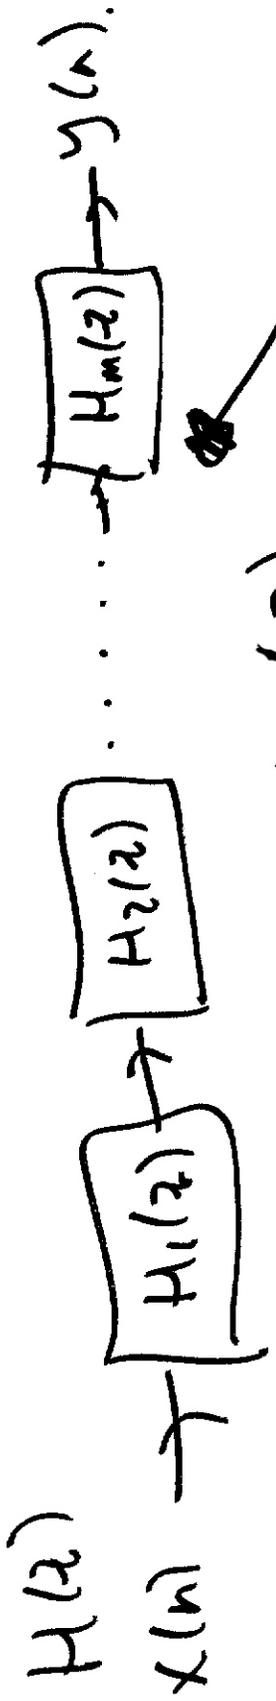


Cascade Implementation

Q How To implement $H_k(z)$.

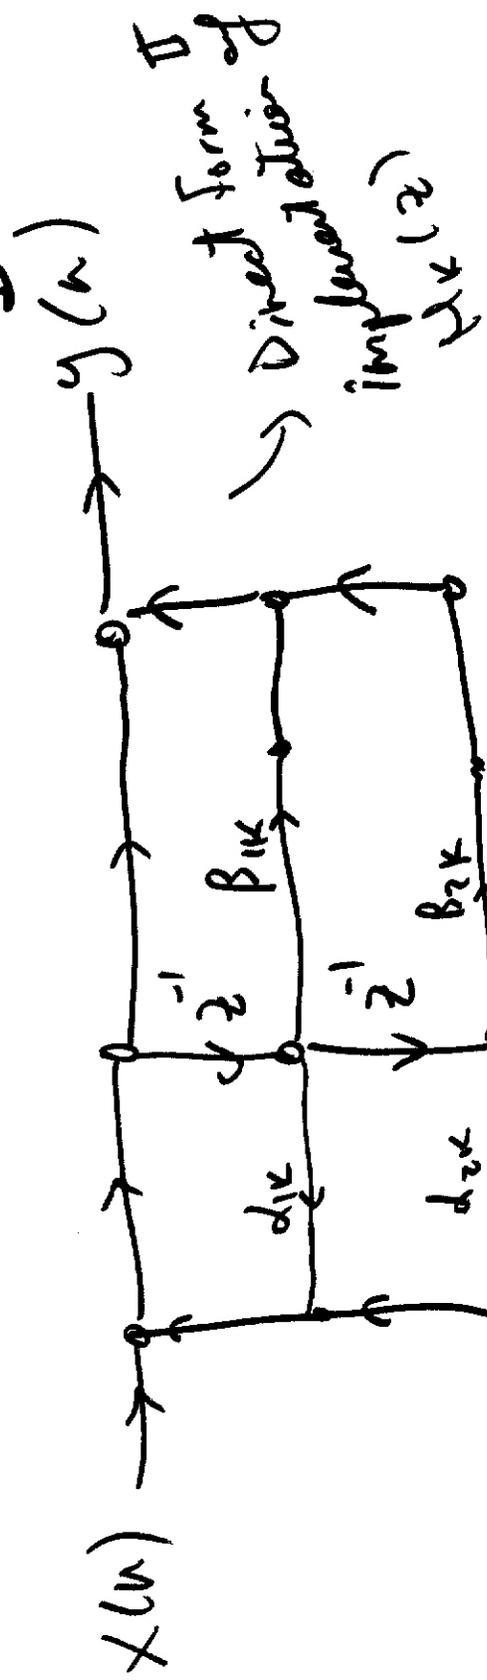

$$1 + \beta_{1k} z^{-1} + \beta_{2k} z^{-2}$$

$$H_k(z) = \frac{1 + \beta_{1k} z^{-1} + \beta_{2k} z^{-2}}{1 - \alpha_{1k} z^{-1} - \alpha_{2k} z^{-2}}$$

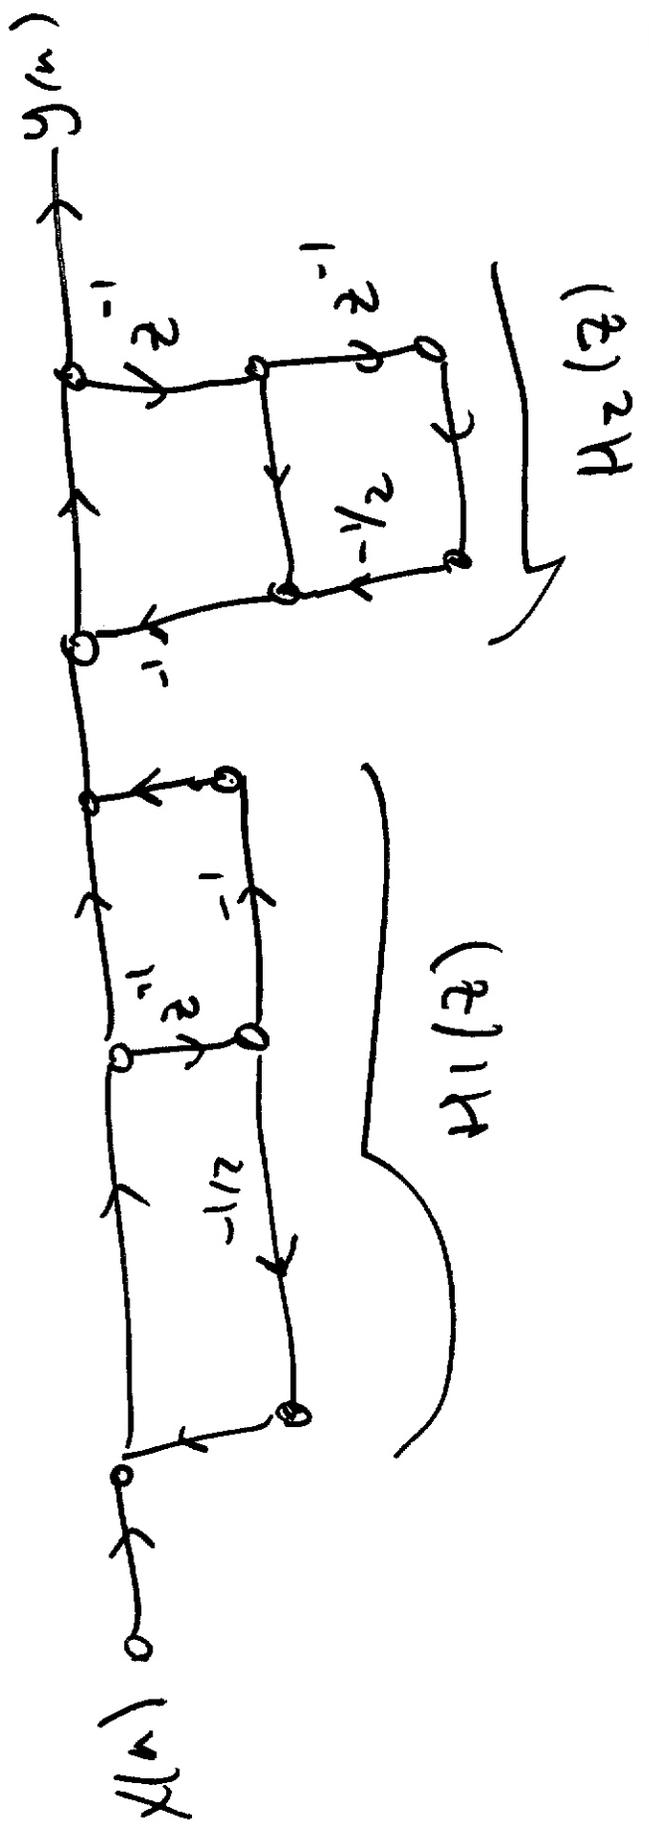

$$\frac{z^2 \frac{1}{z} + 1}{1 - z^{-1}} = H_2(z)$$

$$\frac{z^2 \frac{1}{z} + 1}{1 - z^{-1}} = H_1(z)$$

where

$$H_2(z) = (z) H_1(z)$$

$$\frac{(z^2 \frac{1}{z} + 1)(1 - z^{-1})}{1 - z^{-1}} = H_1(z)$$

Parallel Implementation


$$H(z) = \frac{\sum_{k=0}^p b_k z^{-k}}{1 - \sum_{k=1}^p a_k z^{-k}}$$

$$= \sum_k H_k(z)$$


real

$$H(z) = \sum_k A_k z^{-k} + \sum_k \frac{B_k}{1 - g_k z^{-1}} + \sum_k \frac{C_k + D_k z^{-1}}{1 - h_{1k} z^{-1} - h_{2k} z^{-2}}$$

real

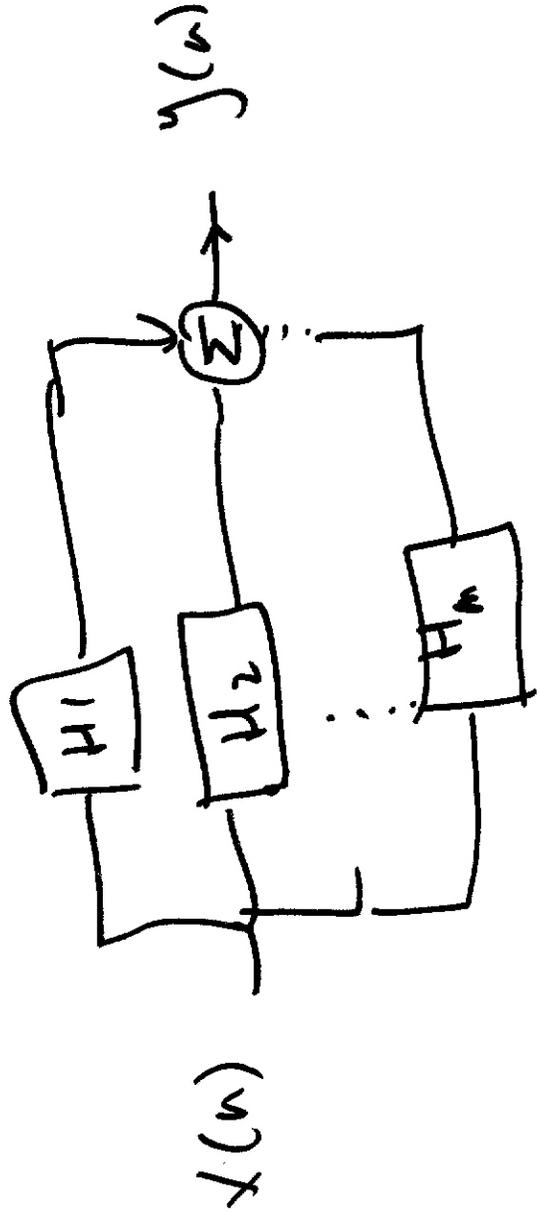


$$\begin{aligned}
 \text{Ex } H(z) &= 2z^{-1} + \underbrace{1 + z^{-1} + \frac{1}{2}z^{-2}}_{H_1} \\
 &= \underbrace{\frac{1 - z^{-3}}{1 + z^{-1} + \frac{1}{2}z^{-2}}}_{H_2}
 \end{aligned}$$

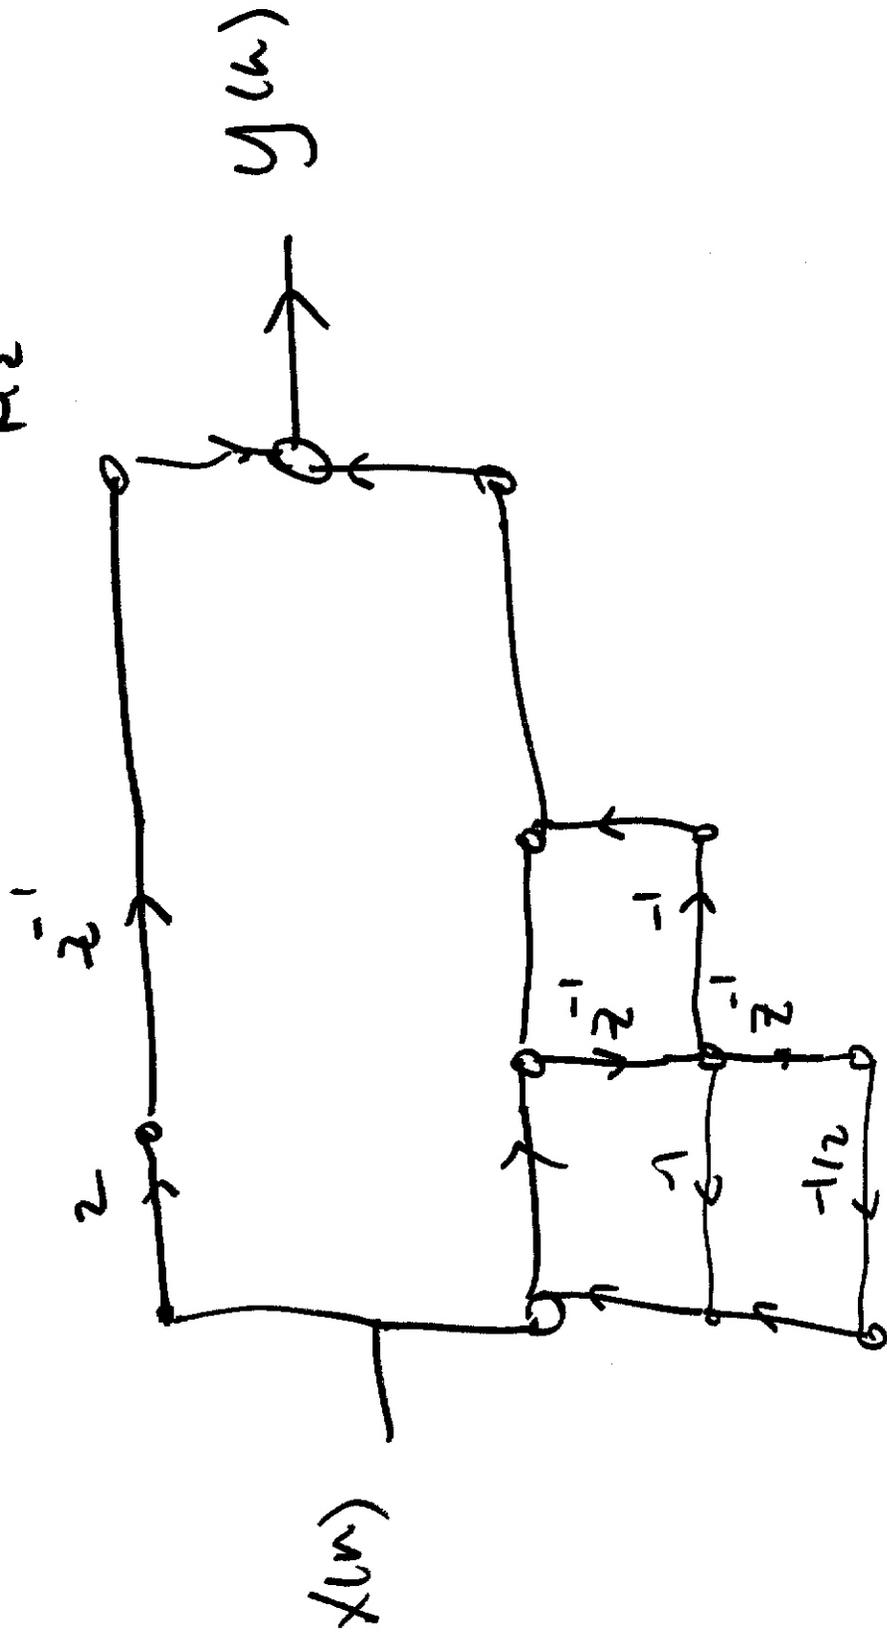

Concave / Parallel Structure.

$$H(z) = \sum_k H_k(z) + \prod_k G_k(z)$$

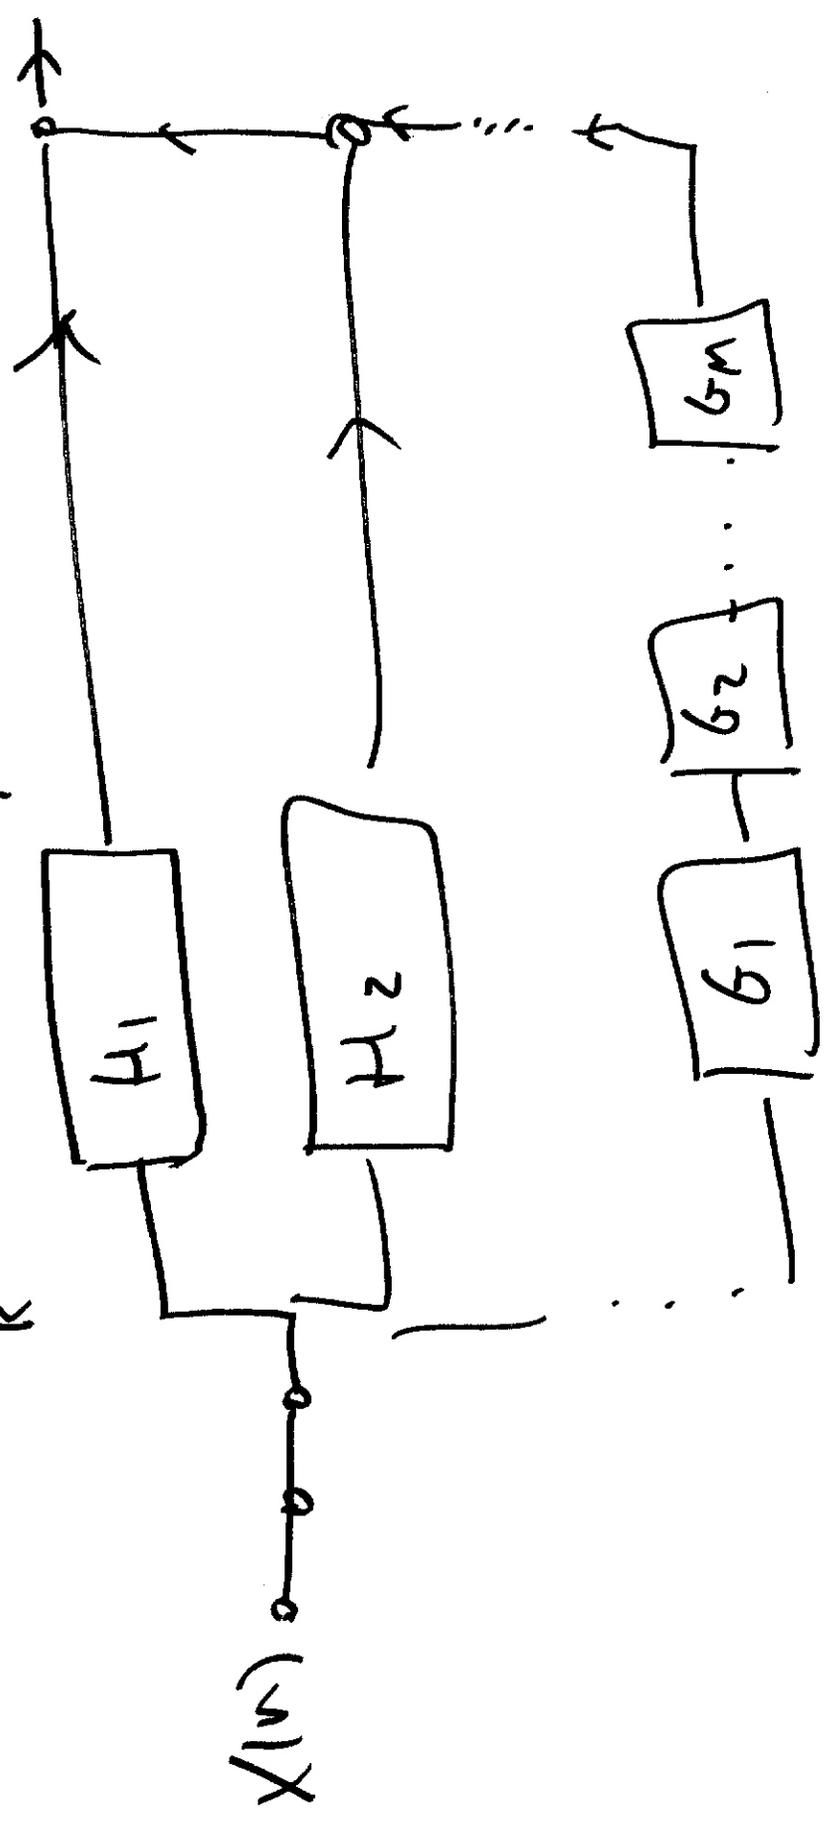


Polynomial Interpolation

To Fundamental Theorem of Algebra

$$P(z) = \beta_n z^n + \beta_{n-1} z^{n-1} + \dots + \beta_1 z + \beta_0$$


Polynomial degree

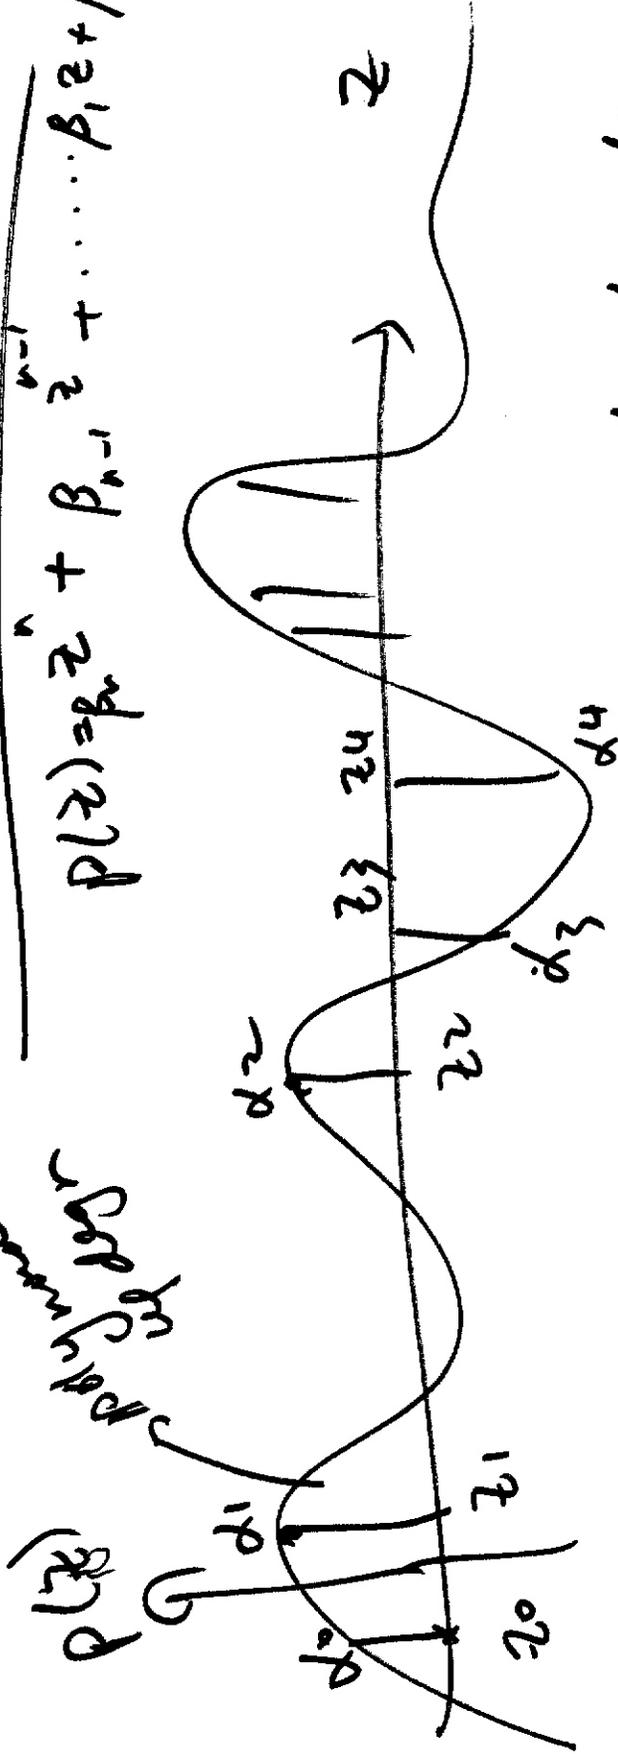

Any $n+1$ random samples/values of an n th deg poly. polynomial can be used to uniquely reconstruct it.

$$\beta_n z_0^n + \beta_{n-1} z_0^{n-1} + \dots + \beta_1 z_0 + \beta_0 = \alpha_0$$

$$\beta_n z_1^n + \beta_{n-1} z_1^{n-1} + \dots + \beta_1 z_1 + \beta_0 = \alpha_1$$

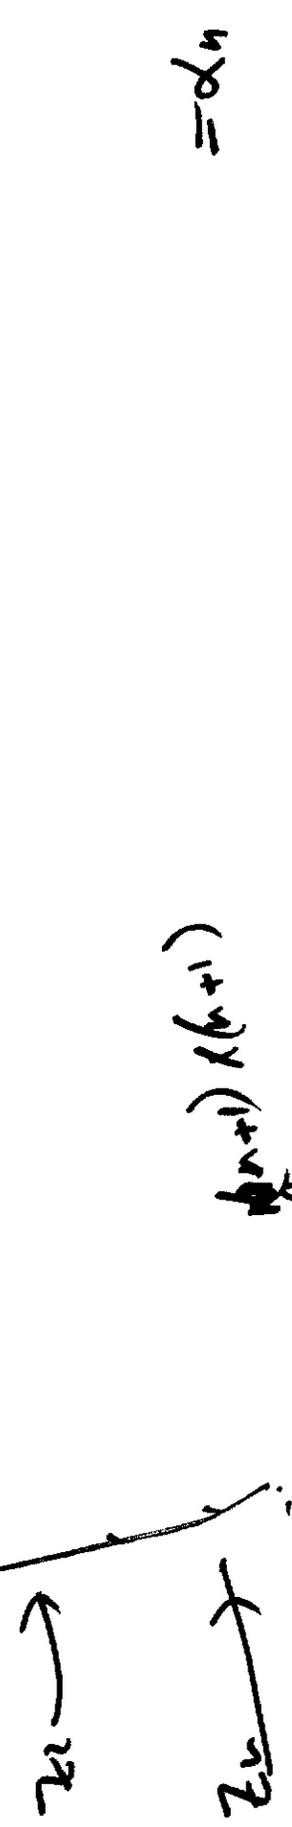


$$= \alpha_n$$

$$A \vec{x} = \vec{b}$$

$$\begin{bmatrix} z_0^{n-1} & z_0^{n-2} & \dots & z_0 & 1 \\ z_1^{n-1} & z_1^{n-2} & \dots & z_1 & 1 \\ \vdots & \vdots & \ddots & \vdots & \vdots \\ z_n^{n-1} & z_n^{n-2} & \dots & z_n & 1 \end{bmatrix} \begin{bmatrix} \beta_n \\ \beta_{n-1} \\ \vdots \\ \beta_1 \\ \beta_0 \end{bmatrix} = \begin{bmatrix} \alpha_0 \\ \alpha_1 \\ \vdots \\ \alpha_n \end{bmatrix}$$


Van der Monde matrix

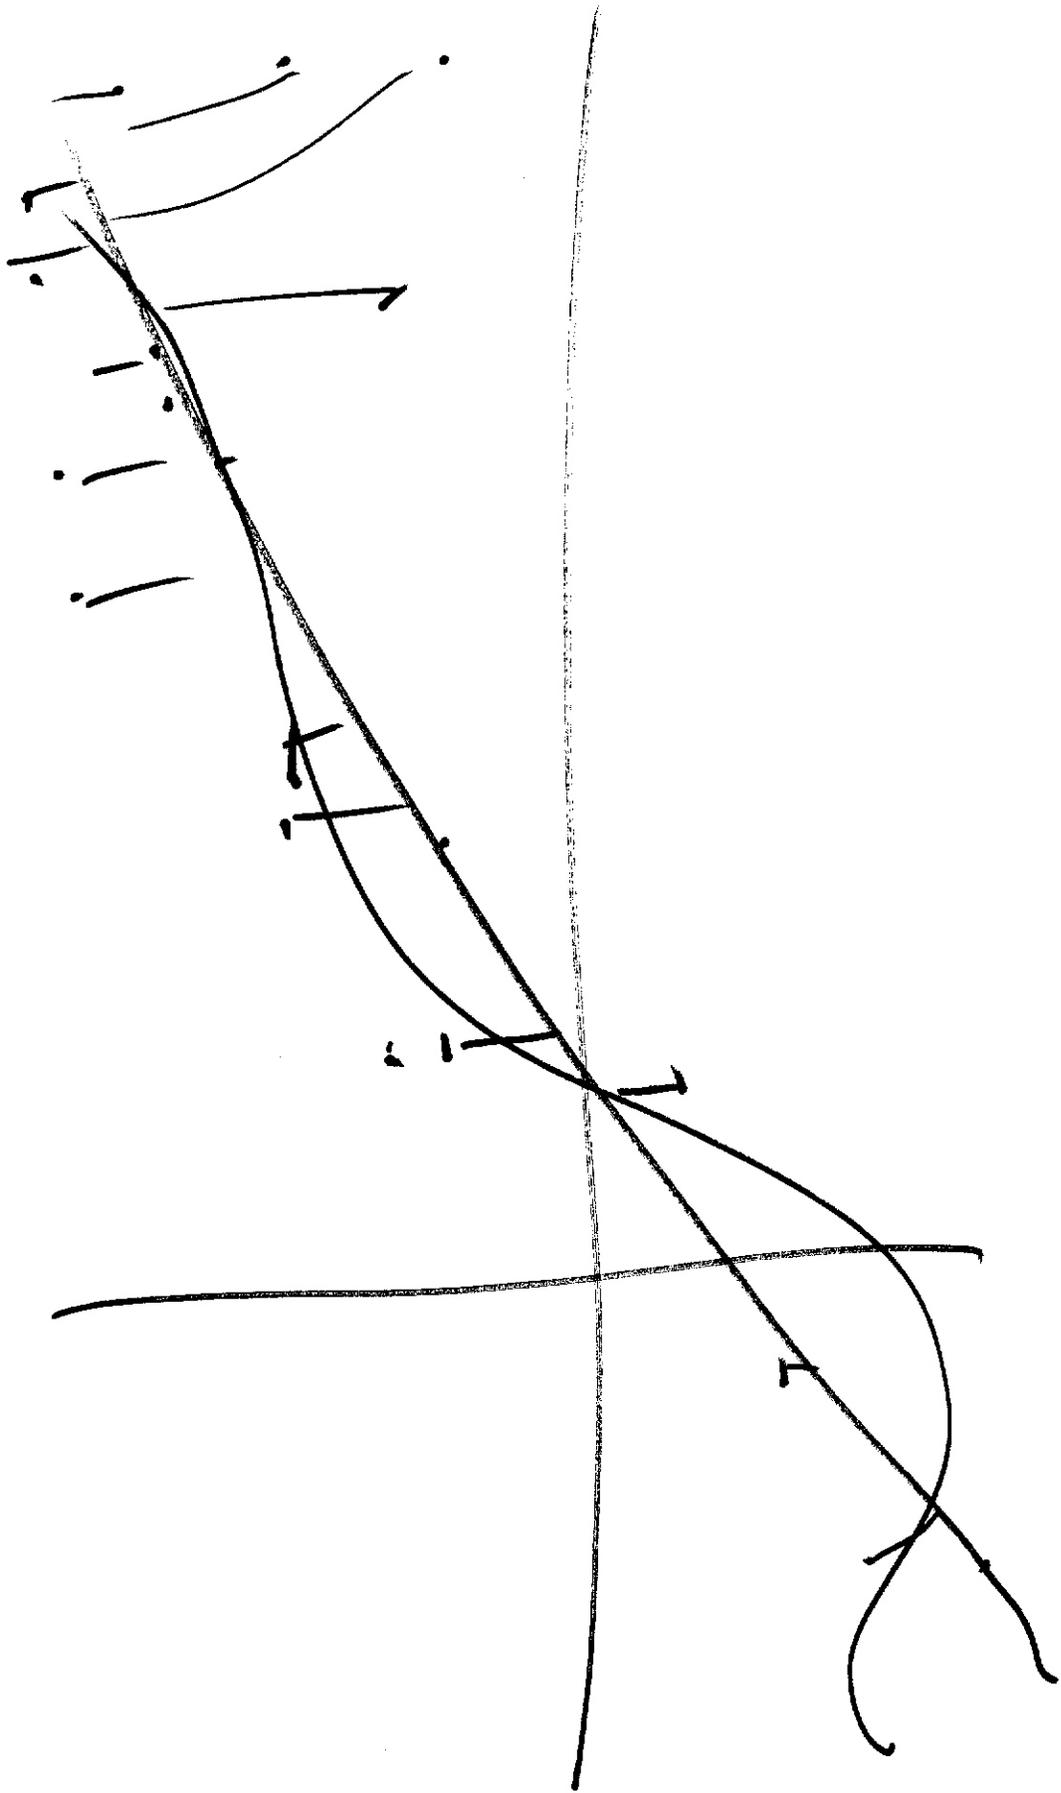

2D Polynomial Interpolation

Does NOT work


$P(z_1, z_2)$

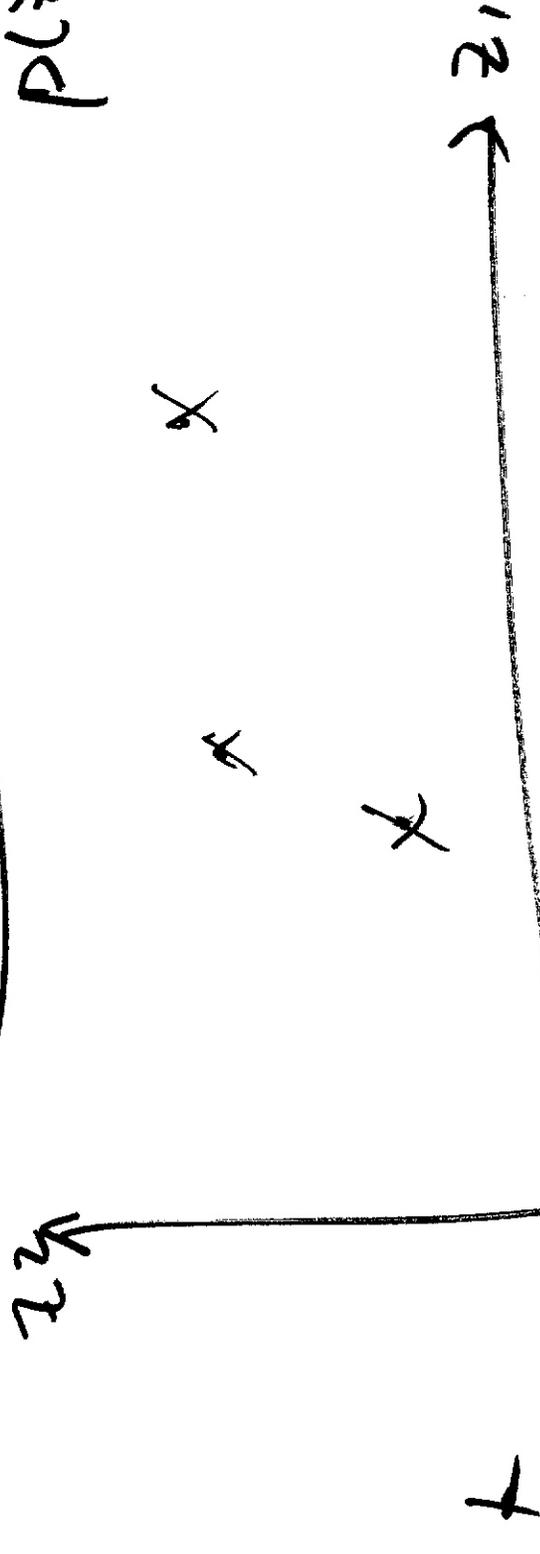


$$P(z_1, z_2) = \alpha z_1^2 + \beta z_2^2 + \gamma z_1 z_2 + \epsilon z_1 + \eta z_2 + \delta$$

Transposition Th.

change order of input/output; change the direction of flow graph \Rightarrow get same system i.e. same input/output relationship.

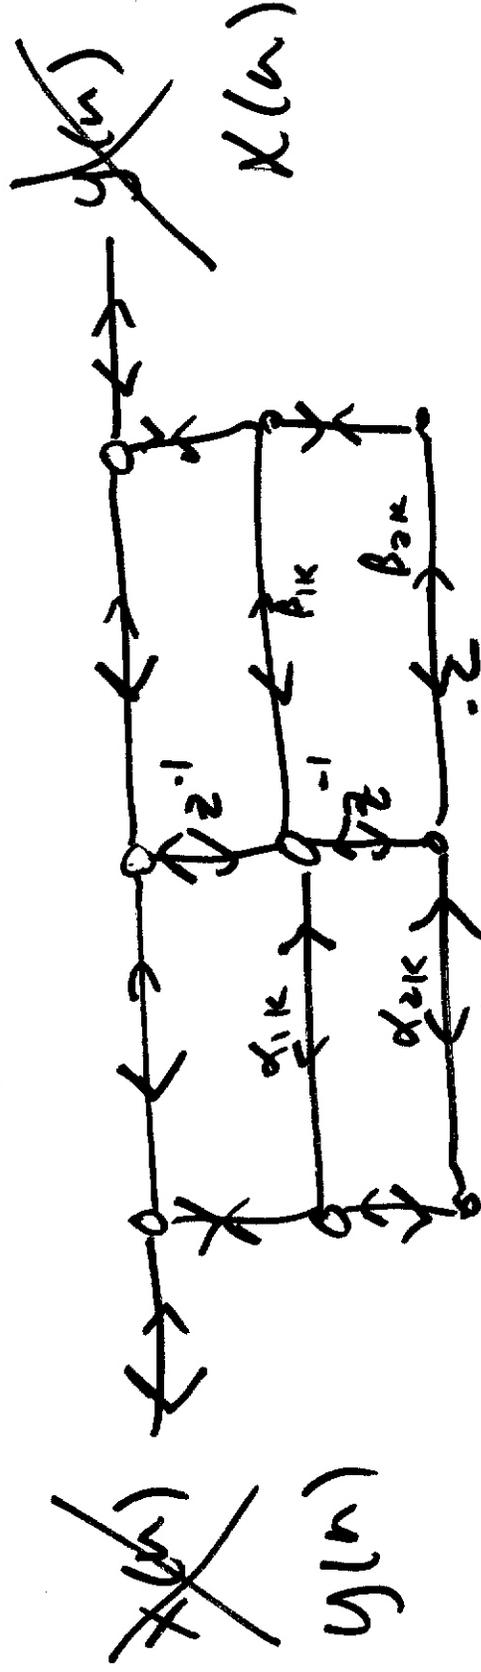

$$H_k(z) = \frac{1 + \beta_{1k}z^{-1} + \beta_{2k}z^{-2}}{1 - \alpha_{1k}z^{-1} - \alpha_{2k}z^{-2}}$$

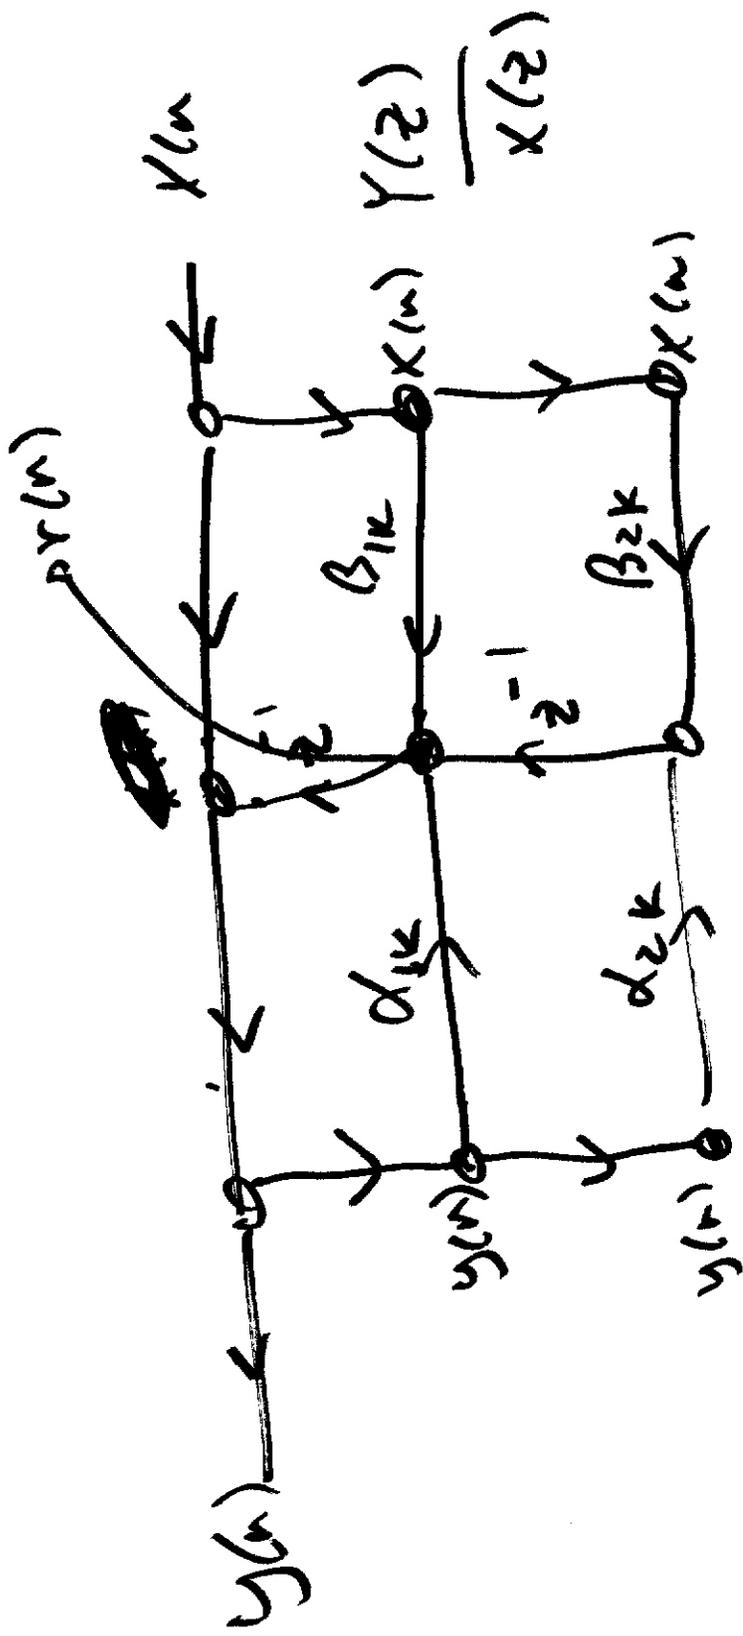

$$\left. \begin{aligned}
 r(n) &= \alpha_{1k} y(n) + \beta_{1k} x(n) + \beta_{2k} x(n-1) \\
 &\quad + \alpha_{2k} y(n-1) \\
 y(n) &\equiv x(n) + r(n-1)
 \end{aligned} \right\}$$

$$y(n) = x(n) + \alpha_{1k} y(n-1) + \beta_{1k} x(n-1) + \beta_{2k} x(n-2) + \alpha_{2k} y(n-2)$$

$$\frac{Y(z)}{X(z)} = \frac{1 + \beta_{1k} z^{-1} + \beta_{2k} z^{-2}}{1 - \alpha_{1k} z^{-1} - \alpha_{2k} z^{-2}}$$

$$= H(z)$$