

EE123


Digital Signal Processing

Lecture 2

Discrete Time Signals

- Samples of a CT signal:

$$x[n] = X_a(nT) \quad n = 1, 2, \dots$$

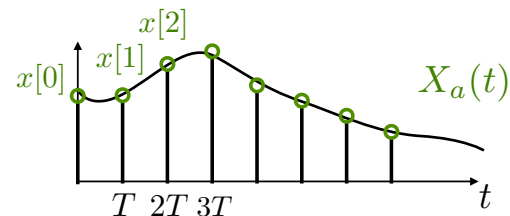


- Or, inherently discrete (Examples?)

Basic Sequences

- Unit Impulse $\delta[n] = \begin{cases} 1 & n = 0 \\ 0 & n \neq 0 \end{cases}$




- Unit Step $U[n] = \begin{cases} 1 & n \geq 0 \\ 0 & n < 0 \end{cases}$

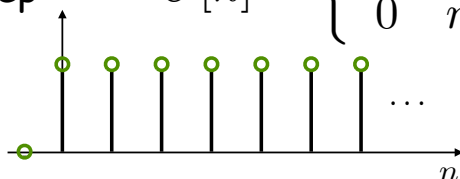


Basic Sequences


- Exponential $x[n] = \begin{cases} A\alpha^n & n \geq 0 \\ 0 & n < 0 \end{cases}$




$0 < \alpha < 1$



$\alpha > 1$



$-1 < \alpha < 0$



$\alpha < -1$

Bounded

unBounded

Discrete Sinusoids

$$x[n] = A \cos(\omega_0 n + \phi)$$

or, $x[n] = Ae^{j\omega_0 n + j\phi}$

Q: Periodic or not? $x[n + N] = x[n]$ for N integer

Discrete Sinusoids

$$x[n] = A \cos(\omega_0 n + \phi)$$

or, $x[n] = Ae^{j\omega_0 n + j\phi}$

Q: Periodic or not? $x[n + N] = x[n]$ for N integer

A: If ω_0/π is rational (Different than C.T.!)

- To find fundamental period N
 - Find smallest integers K, N :

$$\omega_0/N = 2\pi K$$

Discrete Sinusoids

- Example:

$$\cos(5/7\pi n) \quad N = 14 \quad (K = 5)$$

$$\cos(\pi/5n) \quad N = 10 \quad (K = 1)$$

$$\cos(5/7\pi n) + \cos(\pi/5n) \Rightarrow N = \text{S.C.M}\{10, 14\} = 70$$

Discrete Sinusoids

- Another Difference:

Q: Which one is a higher frequency?


$$\omega_0 = \pi \quad \text{or} \quad \omega_0 = \frac{3\pi}{2}$$

Discrete Sinusoids

- Another Difference:

Q: Which one is a higher frequency?

$$\omega_0 = \pi \text{ or } \omega_0 = \frac{3\pi}{2}$$

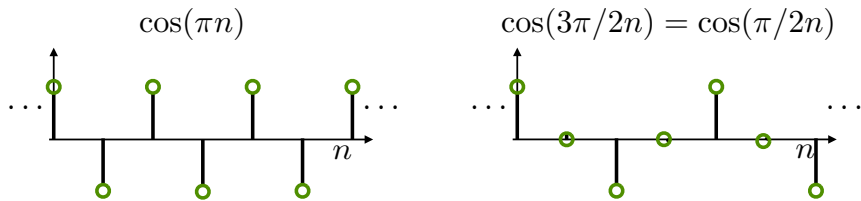

M. Lustig, EECS UC Berkeley
9


Discrete Sinusoids

- Another Difference:

Q: Which one is a higher frequency?

$$\omega_0 = \pi \text{ or } \omega_0 = \frac{3\pi}{2}$$


A: $\omega_0 = \pi$

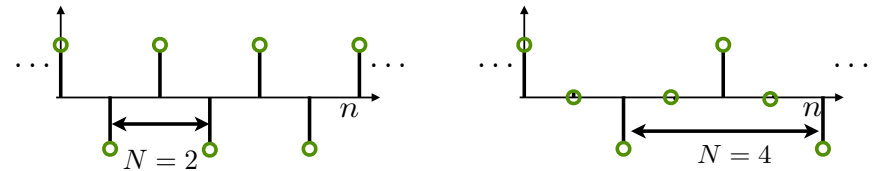

M. Lustig, EECS UC Berkeley
10

Discrete Sinusoids


- Recall the periodicity of DTFT

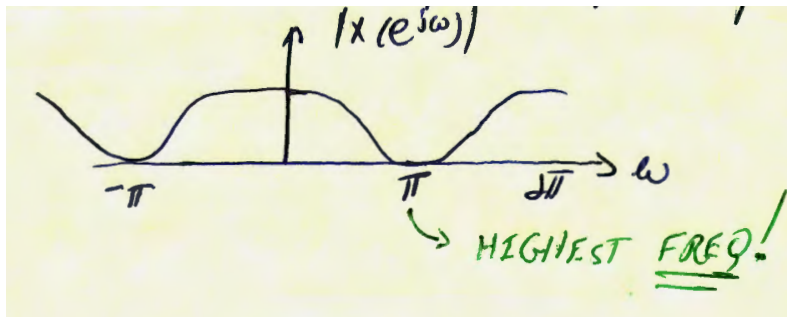

M. Lustig, EECS UC Berkeley
11


Discrete Sinusoids

$\cos(\omega_0 n)$

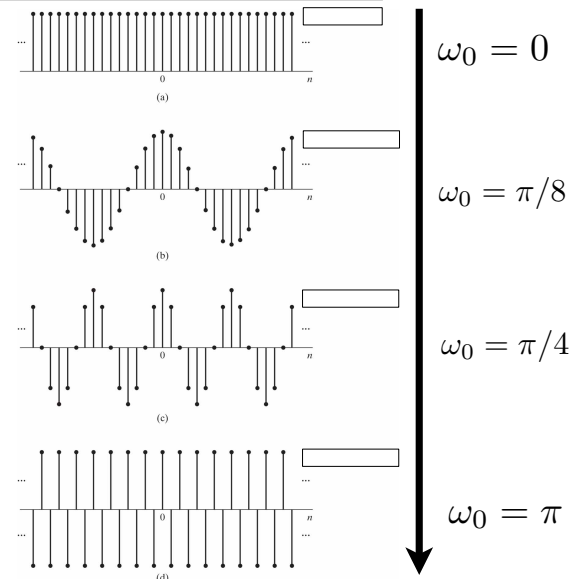

M. Lustig, EECS UC Berkeley
12


Discrete Sinusoids

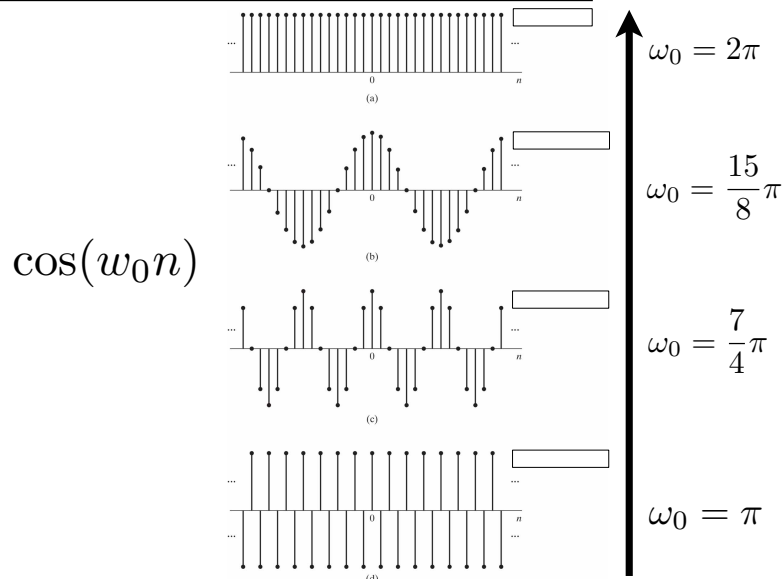

M. Lustig, EECS UC Berkeley

13

Discrete Time Systems



What properties?

- **Causality:**
- $y[n_0]$ depends only on $x[n]$ for $\infty \leq n \leq n_0$

M. Lustig, EECS UC Berkeley

14

Properties of D.T. Systems Cont.

- **Memoryless:**

- $y[n]$ depends only on $x[n]$

Example: $y[n] = x[n]^2$

- **Linearity:**

- Superposition:

$$T\{x_1[n] + x_2[n]\} = T\{x_1[n]\} + T\{x_2[n]\} = y_1[n] + y_2[n]$$

- Homogeneity:

$$T\{ax_1[n]\} = aT\{x_1[n]\} = ay_1[n]$$

M. Lustig, EECS UC Berkeley

15

Properties of D.T. Systems Cont.

- **Time Invariance:**

- If: $y[n] = T\{x[n]\}$

Then: $y[n - n_0] = T\{x[n - n_0]\}$

- **BIBO Stability**

- If: $|x[n]| \leq B_x < \infty \quad \forall n$

Then: $|y[n]| \leq B_y < \infty \quad \forall n$

M. Lustig, EECS UC Berkeley

16

Example:

	Causal	L	TI	memoryless	BIBO stable
Time Shift $y[n] = x[n - n_d]$	if $n_d \geq 0$	Y	Y	if $n_d = 0$	Y
Accumulator $y[n] = \sum_{k=-\infty}^n x[k]$	Y	Y	Y	N	N
Compressor $y[n] = x[Mn]$ $M > 1$	N	Y	N	N	Y


M. Lustig, EECS UC Berkeley

17

Examples

Why the compressor is NOT Time Invariant?

Suppose $M=2$,

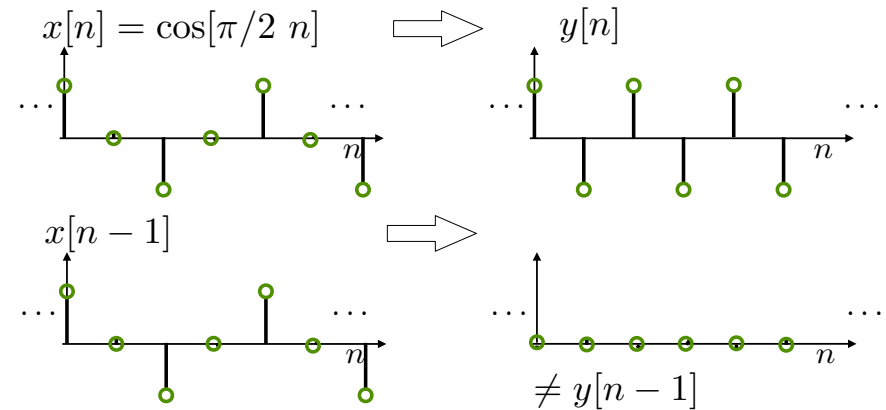


M. Lustig, EECS UC Berkeley

18

Examples

Non-Linear system: Median Filter

$$y[n] = \text{MED}\{x[n-k], \dots, x[n+k]\}$$

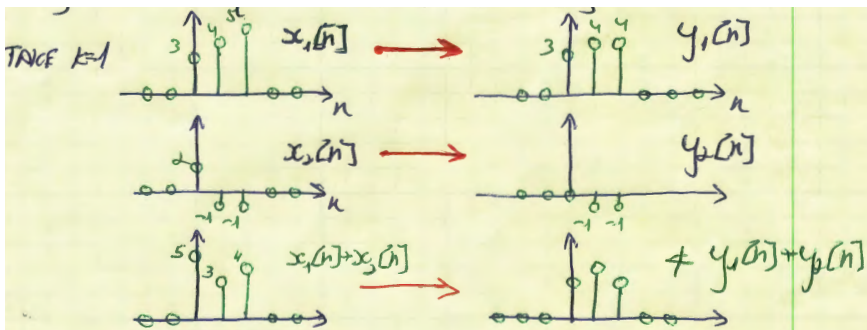

M. Lustig, EECS UC Berkeley

19

Example: Removing Shot Noise

- From NPR This American Life, ep.203
 "The Greatest Phone Message in the World"

em.. (giggle) There comes a time in life, when .. eh... when we hear the greatest phone mail message of all times and well here it is... eh... you have to hear it to believe it..


corrupted message

M. Lustig, EECS UC Berkeley


20

Spectrum of Speech

Speech

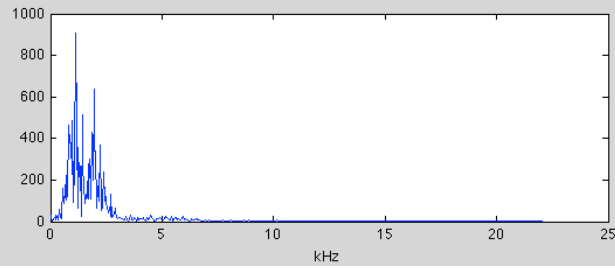


Corrupted Speech

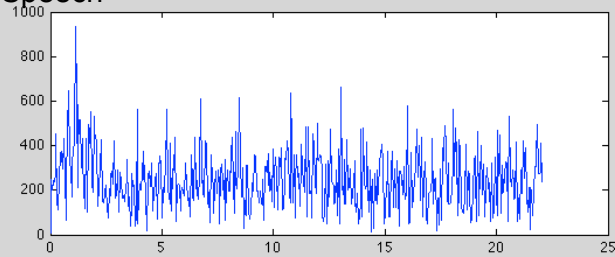


Low Pass Filtering

LP-Filter Spectrum

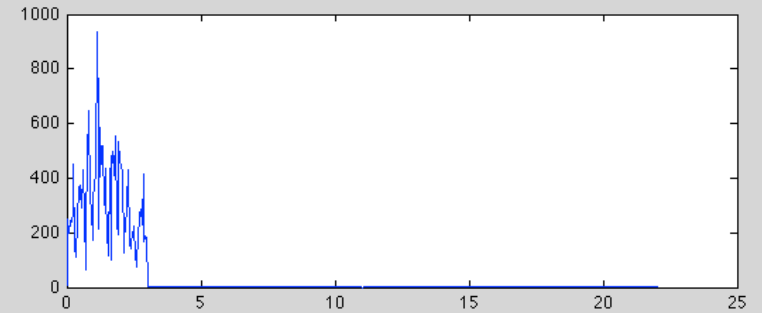


Low-Pass Filtering of Shot Noise

Corrupted

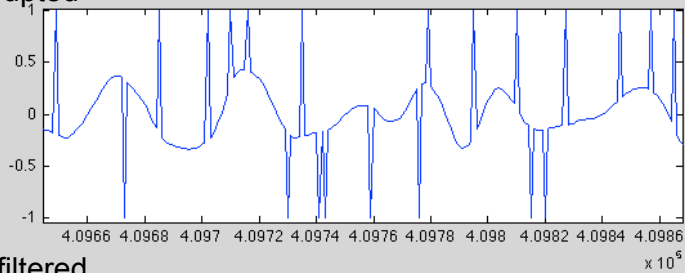


LP-filtered

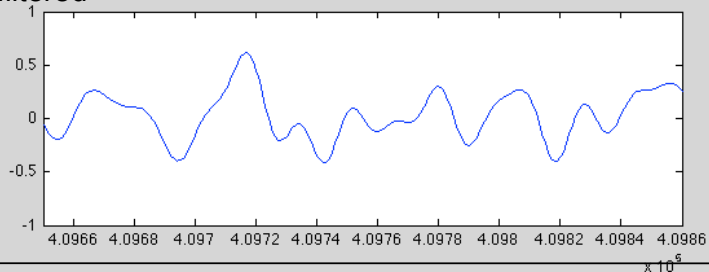


Low-Pass Filtering of Shot Noise

Corrupted

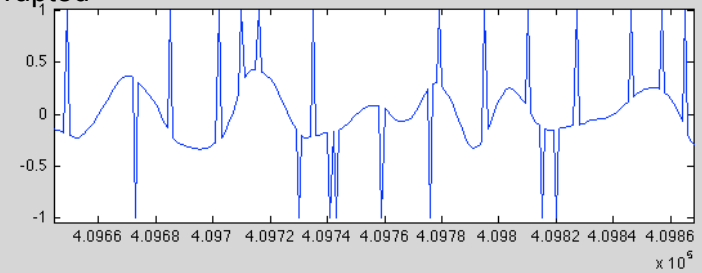

Med-filter

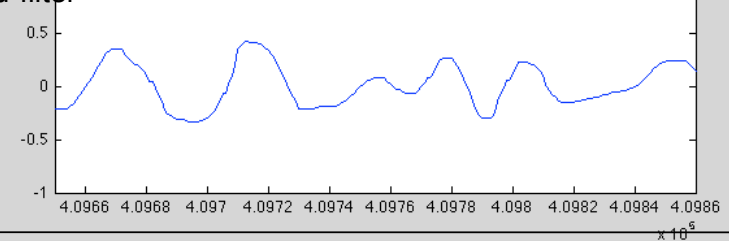


The Greatest Message of All Times...

- I thought you'll get a kick out of a message from my mother.....
Hi Fred, you and the little mermaid can go blip yourself. I told you to stay near the phone... I can't find those books.. you have other books here.. it must be in Le'hoya.. call me back... I'm not going to stay up all night for you... Bye Bye...

Discrete-Time LTI Systems

- The impulse response $h[n]$ completely characterizes an LTI system "DNA of LTI"

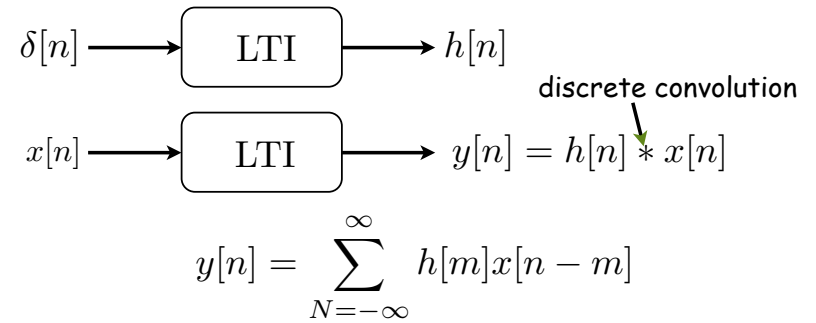

Sum of weighted, delayed impulse responses!

BIBO Stability of LTI Systems

- An LTI system is BIBO stable iff $h[n]$ is absolutely summable

$$\sum_{k=-\infty}^{\infty} |h[k]| < \infty$$

BIBO Stability of LTI Systems

- Proof: "if"

$$\begin{aligned} |y[n]| &= \left| \sum_{k=-\infty}^{\infty} h[k]x[n - k] \right| \\ &\leq \sum_{k=-\infty}^{\infty} |h[k]| \cdot |x[n - k]| \leq B_x \\ &\leq B_x \sum_{k=-\infty}^{\infty} |h[k]| < \infty \end{aligned}$$

BIBO Stability of LTI Systems

• Proof: "only if"

-suppose $\sum_{k=-\infty}^{\infty} |h[k]| = \infty$
show that there exists bounded $x[n]$ that
gives unbounded $y[n]$

-Let:
$$x[n] = \frac{h[-n]}{|h[-n]|} = \text{Sign}\{h[-n]\}$$

$$y[n] = \sum h[k]x[n-k]$$

$$y[0] = \sum h[k]x[-k] = \sum h[k]h[k]/|h[k]| = \sum |h[k]| = \infty$$