



EE C247B - ME C218 Introduction to MEMS Design Spring 2018

Prof. Clark T.-C. Nguyen

Dept. of Electrical Engineering & Computer Sciences
University of California at Berkeley
Berkeley, CA 94720

Lecture Module 13: Equivalent Circuits II

EE C245: Introduction to MEMS Design

LecM 13

C. Nguyen

11/18/08

1

Lecture Outline

- Reading: Suturia, Chpt. 6, Chpt. 14
- Lecture Topics:
 - ↳ Input Modeling
 - Force-to-Velocity Equiv. Ckt.
 - Input Equivalent Ckt.
 - ↳ Current Modeling
 - Output Current Into Ground
 - Input Current
 - Complete Electrical-Port Equiv. Ckt.
 - ↳ Impedance & Transfer Functions

EE C245: Introduction to MEMS Design

LecM 13

C. Nguyen

11/18/08

2



Input Modeling

EE C245: Introduction to MEMS Design

LecM 13


C. Nguyen

11/18/08

3



Electromechanical Analogies

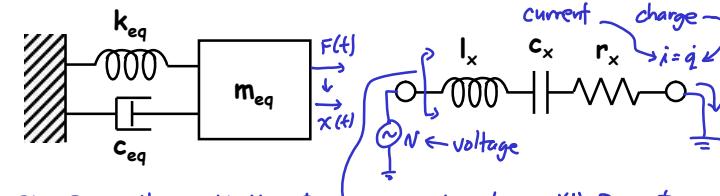

$$F(t) = F \cos(\omega t) \rightarrow x(t) = X \cos\omega t$$

Equation of Motion:

$$m_{eq}\ddot{x} + C_{eq}\dot{x} + k_{eq}x = F(t)$$

⇒ Using phasor concept:

$$F = j\omega m_{eq}x + \frac{k_{eq}}{j\omega}x + C_{eq}\dot{x}$$

⇒ by analogy:

$F \rightarrow N$	$m_{eq} \rightarrow L_x$	$C_{eq} \rightarrow R_x$
$\dot{x} \rightarrow i$	$k_{eq} \rightarrow \frac{1}{C_{eq}}$	

[Parameter Relationships in the Current Analogy]

EE C245: Introduction to MEMS Design

LecM 13

C. Nguyen

11/18/08

4

Lecture 22m2: Equivalent Circuits II

Bandpass Biquad Transfer Function

UC Berkeley

$$F = j\omega m_{eq} \ddot{x} + \frac{k_{eq}}{j\omega} \dot{x} + c_{eq}x$$

$$\Rightarrow \text{Converting to full pharor form:}$$

$$F = (j\omega(j\omega x) m_{eq} + \frac{k_{eq}}{j\omega} (j\omega x) + c_{eq}(j\omega x))$$

$$\frac{X(j\omega)}{F(j\omega)} = \frac{\frac{k_{eq}}{j\omega}}{1 - (\frac{\omega}{\omega_0})^2 + j\frac{\omega}{Q\omega_0}}$$

$$\frac{X(j\omega)}{F(j\omega)} = \frac{1}{k_{eq}} \left[-\omega^2 \frac{m_{eq}}{k_{eq}} + 1 + j\frac{c_{eq}\omega}{k_{eq}} \right]^{-1} = \frac{1}{k_{eq}} \left[\left(\frac{\omega}{\omega_0} \right)^2 + 1 + j\frac{\omega}{Q\omega_0} \right]^{-1}$$

$$\left[\frac{k_{eq}}{m_{eq}} = \omega_0^2, Q = \frac{m_{eq}\omega_0}{c_{eq}} = \frac{k_{eq}}{\omega_0 c_{eq}} \Rightarrow \frac{k_{eq}}{c_{eq}} = Q\omega_0 \right]$$

EE C245: Introduction to MEMS Design LecM 13 C. Nguyen 11/18/08 5

Force-to-Velocity Relationship

UC Berkeley

- The relationship between input voltage v_1 and force F_{d1} :
$$F_{d1} \approx -V_P \frac{\partial C_1}{\partial x} v_1$$
- When displacement x is the mechanical output variable:
$$\frac{X(s)}{F_{d1}(s)} = \frac{1}{k} \frac{s^2 + \omega_o^2}{s^2 + (\omega_o/Q)s + \omega_o^2}$$
- When velocity v is the mechanical output variable:
$$\frac{v(s)}{F_{d1}(s)} = \frac{sX(s)}{F_{d1}(s)} = \frac{1}{k} \frac{\omega_o^2 s}{s^2 + (\omega_o/Q)s + \omega_o^2}$$

EE C245: Introduction to MEMS Design LecM 13 C. Nguyen 11/18/08 6

Force-to-Velocity Equiv. Ckt.

UC Berkeley

- Combine the previous lumped LCR mechanical equivalent circuit with a circuit modeling the capacitive transducer \rightarrow circuit model for voltage-to-velocity

EE C245: Introduction to MEMS Design LecM 13 C. Nguyen 11/18/08 7

Equiv. Circuit for a Linear Transducer

UC Berkeley

- A transducer ...
 - converts energy from one domain (e.g., electrical) to another (e.g., mechanical)
 - has at least two ports
 - is not generally linear, but is virtually linear when operated with small signals (i.e., small displacements)

EE C245: Introduction to MEMS Design LecM 13 C. Nguyen 11/18/08 8

Lecture 22m2: Equivalent Circuits II

