

1 Periodic Waveforms

Periodic waveforms are signals $x(t)$ that repeat the same pattern in a set amount of time T , which is called the period of $x(t)$. Mathematically, we say $x(t)$ is T -periodic if

$$x(t + T) = x(t)$$


for all time t . The fundamental frequency f_0 of the signal is given by

$$f_0 = \frac{1}{T}.$$

One periodic signal we've used many times is the sinusoid. The natural period of a sinusoid is 2π . We define a cosine with period T by


$$x(t) = \cos\left(\frac{2\pi}{T}t\right).$$


Periodic waveforms are extremely useful in many engineering contexts. An obvious example is alternating current (AC), which is a pure sinusoid. But often we use other periodic functions besides sinusoids. For example, pulse width modulation (PWM) waveforms have the form

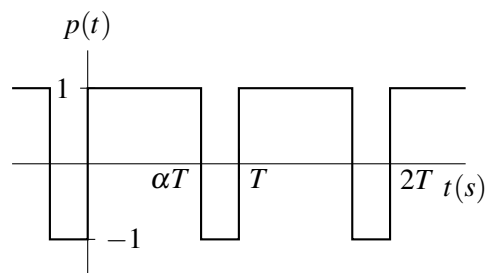

where $\alpha \in [0, 1]$ defines the duty-cycle of the signal.

Pulse width modulation is used to change the brightness of LED's, as well as in DC-DC power conversion. We can produce a PWM waveform $p(t)$ by passing a T -periodic sine $y(t)$ with an amplitude (DC) and phase offset through a nonlinear function $f(\cdot)$:

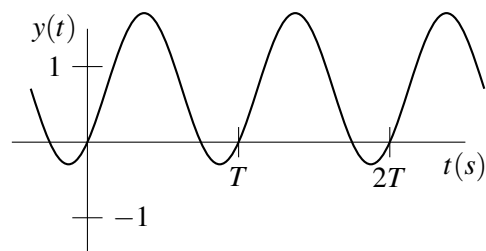

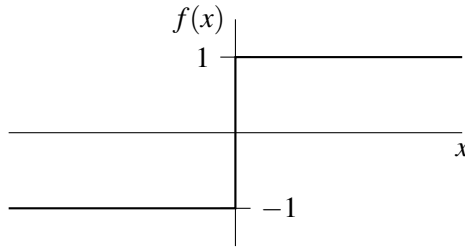

Here, $p(t) = f(y(t))$. As we can see above, applying this nonlinear function to a T -periodic signal results in a T -periodic waveform. This is in fact a more general property: a function applied to a T -periodic sinusoid will produce a (more complicated) T -periodic waveform.

Therefore, we might consider that an arbitrary T -periodic waveform is related to an underlying T -periodic sinusoid.

2 Fourier Series

The Fourier Series says we can represent *any* T -periodic waveform as the sum of many sine waves with frequencies at integer multiples of the fundamental frequency f_0 :

$$f = 0, f_0, 2f_0, 3f_0, \dots$$

where $f = 0$ is the DC component, $f = f_0$ is the fundamental frequency, and $f = 2f_0, 3f_0, \dots$ are the harmonics.

Mathematically, we can write any T -periodic waveform $x(t)$ as

$$x(t) = \sum_{i=0}^{\infty} B_i \cos(2\pi i f_0 t + \theta_i) = \sum_{l=-\infty}^{\infty} A_l e^{j2\pi f_0 l t}, \quad (1)$$

where B_i is a real-valued amplitude, θ_i is a real-valued phase offset, and A_l is a complex-valued coefficient. This is called the Fourier Series representation of the signal. We calculate the coefficients A_l as

$$A_l = \frac{1}{T} \int_0^T e^{-j2\pi f_0 l t} x(t) dt \quad (2)$$

for each integer $l \in [-\infty, \infty]$.

We can see that the Fourier Series represents a waveform with an infinite number of sinusoids up to infinitely high frequencies. But what if we only want to represent a waveform with a finite number of sinusoids?

Let us truncate the Fourier Series representation of $x(t)$ to a summation of $N = 2M + 1$ sinusoids and use the fact that $f_0 = \frac{1}{T}$:

$$x(t) = \sum_{i=-M}^M X_i e^{j\frac{2\pi}{T} i t}. \quad (3)$$

This format should remind you of the Discrete Fourier Transform, where we are representing a discrete waveform as a summation of discrete sinusoids - except, of course, that the Fourier Series is a representation of *continuous* waveforms, rather than *discrete* waveforms. We will explore this connection further below.

3 Questions

1. Periodic Waveforms

Are the following functions $x(t)$ periodic? If so, what is the function's period T and fundamental frequency f_0 ?

$x(t)$	Periodic?	T	f_0
e^t			
e^{jt}			
2^{at} where $a = a_r + ja_i$			
$\frac{dy(t)}{dt}$ where $y(t)$ is T -periodic			
$z(t) \triangleq y(Tt)$ where $y(t)$ is T -periodic			
C where C is a constant			

2. Fourier Series and the DFT

In this problem, you will discover how we can use the DFT of N samples of a continuous waveform $x(t)$ to calculate the truncated Fourier Series representation of $x(t)$.

Let's explore the connection between the truncated Fourier Series and the DFT further. As a reminder, the truncated Fourier Series has us represent continuous, T -periodic signal $x(t)$ as

$$x(t) = \sum_{i=-M}^M X_i e^{j\frac{2\pi}{T}it}. \quad (4)$$

- (a) We take $N = 2M + 1$ samples of the T -periodic function $x(t)$ across a single period T . That is, our samples are at

$$t = \frac{T}{N}k, \quad k \in \{0, 1, 2, \dots, N-1\}.$$

How can we represent the k^{th} sample of $x(t)$, x_k ?

- (b) Write the relationship between the x_k (samples) and X_i (Fourier Series coefficients) in matrix-vector form. That is, given

$$\begin{bmatrix} x_0 \\ x_1 \\ x_2 \\ \vdots \\ x_{N-1} \end{bmatrix} = A \begin{bmatrix} X_{-M} \\ X_{-M+1} \\ \vdots \\ X_{M-1} \\ X_M \end{bmatrix}, \quad (5)$$


what is the matrix A ? What is this matrix's relationship to the DFT matrix, F_N ?

(c) If we reorder the X_i Fourier Series coefficients to be in "DFT order" (that is, in frequency order $f = 0, f_0, 2f_0, \dots, Mf_0, -Mf_0, \dots, -2f_0, -f_0$) show that

$$\begin{bmatrix} x_0 \\ x_1 \\ x_2 \\ \vdots \\ x_{N-1} \end{bmatrix} = F_N^* \begin{bmatrix} X_0 \\ X_1 \\ \vdots \\ X_M \\ X_{-M} \\ \vdots \\ X_{-1} \end{bmatrix}. \quad (6)$$

3. Fourier Series

Suppose we have the T -periodic waveform $x(t)$:

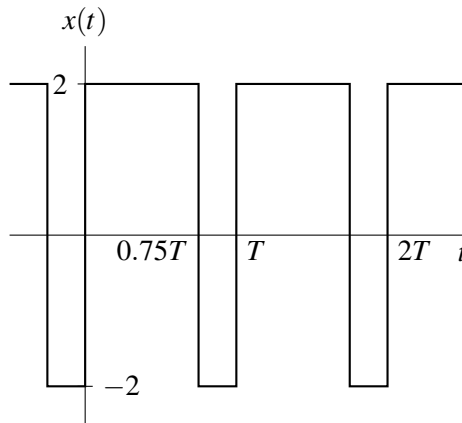

That is, on the interval $[0, T)$, $x(t)$ is given by

$$x(t) = \begin{cases} 2, & 0 \leq t < \frac{3}{4}T \\ -2, & \frac{3}{4}T \leq t < T \end{cases}$$

and is T -periodic outside $t = [0, T)$.

(a) Calculate the Fourier Series coefficients A_l , given by

$$A_l = \frac{1}{T} \int_0^T e^{-j\frac{2\pi}{T}lt} x(t) dt$$

for integer $l \in [-\infty, \infty]$.

Contributors:

- Regina Eckert.