Feb. 20, 2008

Reconstruction of 2-D Signals from Partial Fourier Information

- motivations: electron microscopy
  optical astronomy
  - crystallography. . . .

- 3 problems:
  1. FTM = magnitude of Fourier Transform
  2. Recon from Phase Fourier Transform
  3. Recon from level crossings

Recon from FTM

1-D case:

- $X(n)$: discrete time 1-D.
  $N+1$ nonzero points.
  $n = 0, \ldots, N$

$$D.T.F.T\{x(n)\} = X(\omega) = \sum_{n=0}^{N} x(n) e^{-j\omega n} \qquad e^{-j\omega} = y$$

If We know $|X(\omega)|$ $\longrightarrow$ Can we get $x(n)$?

cont. freq. var.

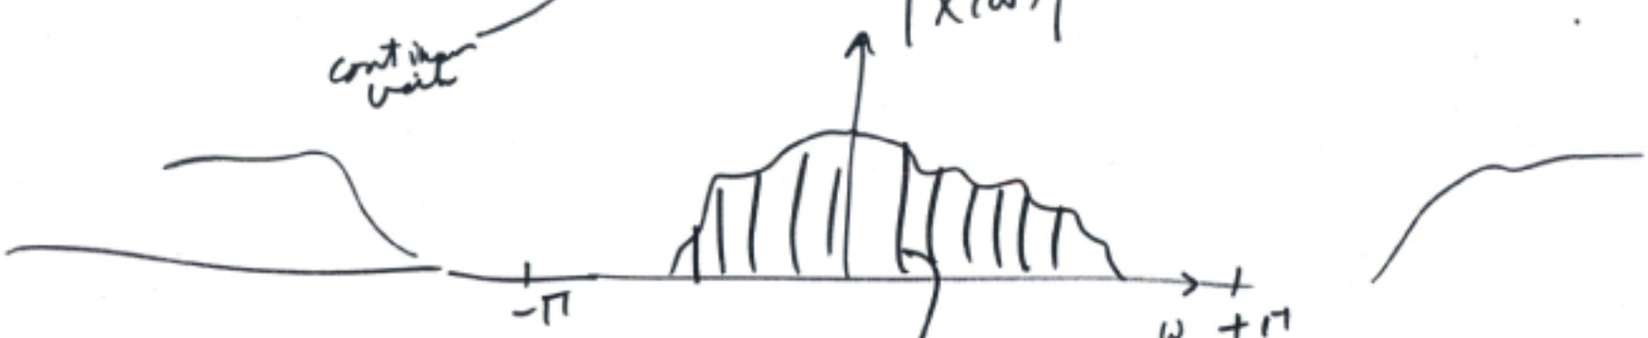

$N+1$ points

If I know $|X(\omega)|$ at $N+1$ pts $\Longrightarrow$ cannot recon signal

$$\begin{bmatrix} e^{-0 \cdot j\omega_0} & e^{-j1\omega_0} & e^{-j2\omega_0} & \cdots & \\ e^{-0 \cdot j\omega_1} & e^{-j1 \cdot \omega_1} & e^{-j2\omega_1} & \cdots & e^{-j2\omega_1} \\ & & & & \\ e^{-0 \cdot j\omega_N} & e^{-j\omega_N} & e^{-j2\omega_N} & \cdots & e^{-j\omega_N \omega_N} \end{bmatrix} \begin{bmatrix} x(0) \\ x(1) \\ \vdots \\ x(N) \end{bmatrix} = \begin{bmatrix} |X(\omega_0)| \angle \\ |X(\omega_1)| \angle \\ \vdots \\ |X(\omega_{N-1})| \angle \end{bmatrix}$$

$$\sum_{n=0}^{N} x(n)\, y^n = X(\omega)$$

Sampling a 2-D poly of degree at arbitrary N^{th} points results in unique recon of polynomial

$$
\underbrace{\begin{bmatrix} e^{-0 \cdot j\omega_0} & e^{-j\omega_0} & \cdots \\ e^{-0 \cdot j\omega_1} & & \cdots \\ \vdots & & \ddots \\ e^{-0 \cdot j\omega_N} & e^{-j\omega_N} & \cdots \end{bmatrix}}_{4^N \times N}
\underbrace{\begin{bmatrix} X(0) \\ \vdots \\ X(N) \end{bmatrix}}_{N}
=
\underbrace{\begin{bmatrix} |X(\omega_0)|^2 \\ |X(\omega_1)|^2 \\ \vdots \\ |X(\omega_N)|^2 \end{bmatrix}}_{4^N}
$$

<u>Q</u>: Can we uniquely reconstruct if we oversampled F.D.?

<u>A</u> for 1D signal $\longrightarrow$ No 2^N ambiguity

MD signals $\longrightarrow$ yes

auto-correlation fn of $x(n)$.

$$r(n) = \sum_{l} x(l)\, x^*(l+n)$$

$$R(\omega) = \text{D.T.F.T}\{r(n)\} = \sum r(n) e^{-j\omega n} = |X(\omega)|^2$$

$$\Rightarrow F^{-1}\{|X(\omega)|^2\} = r(n)$$

Q: Can we obtain $x(n)$ from $r(n)$?

$$\text{Z.T.}\{r(n)\} = R(z) = X(z)\, X^*\left(\frac{1}{z^*}\right) = \sum_{n=-N}^{+N} r(n) z^{-n}$$

Associated polynomial to $R(z) \triangleq P_r(z) = \sum_{n=0}^{2N} r[N-n]\, z^n$

symmetric

Since coeff $P_r(z)$ are symmetric $\Rightarrow$

If z_0 is a zero of $P_r(z)$, so is z_0^{*-1}

$\Rightarrow$ Can factor $P_r(z)$

$$P_r(z) = A \prod_{i=1}^{N} (z - z_i)(1 - z_i^* z)$$

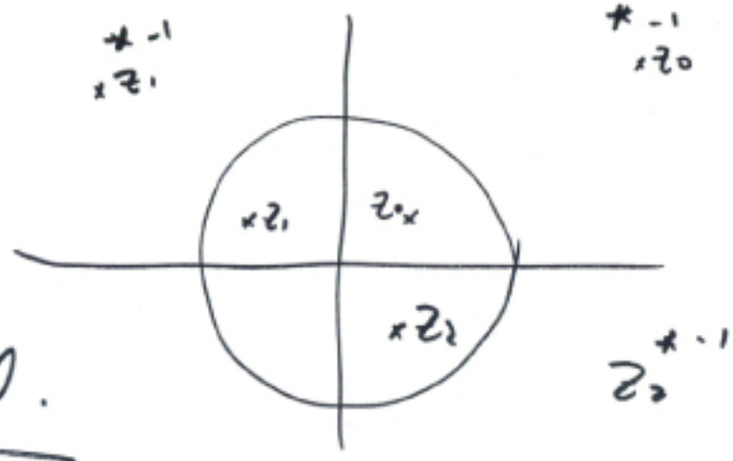

<u>Def</u> mirror of a polynomial.

Associated with any polynomial, there is a mirror polynomial consisting of coefficients in reverse order and conjugated

If $P(z) = \sum_{n=0}^{N} p_n z^n \xrightarrow{\text{mirror}} \tilde{p}(z) = \sum_{n=0}^{N} p_{N-n}^* z^n$

- Assume $y(n) \longrightarrow$ autocorrelation $r(n)$

$$P_r(z) = P_y(z)\, \tilde{P}_y(z)$$

2^N ways in order to generate $P_y(z)$.

$$P_y(z) = \sqrt{A} \prod_{i \in I} (z - z_i) \prod_{j \notin I} (z - z z_j^*)$$

I any subset of $[1, \ldots, N]$

$$(z_0, z_0^{*-1}) \qquad R(z)$$

$$(z_1, z_1^{*-1}) \qquad P_r(z)$$

$$\vdots$$

$$r(n)$$

$$\downarrow$$

$$x(n)$$

$$(z_N, z_N^{*-1})$$

$$2^N \; x(n) \longrightarrow \text{same } r(n)$$

2-D case FTM

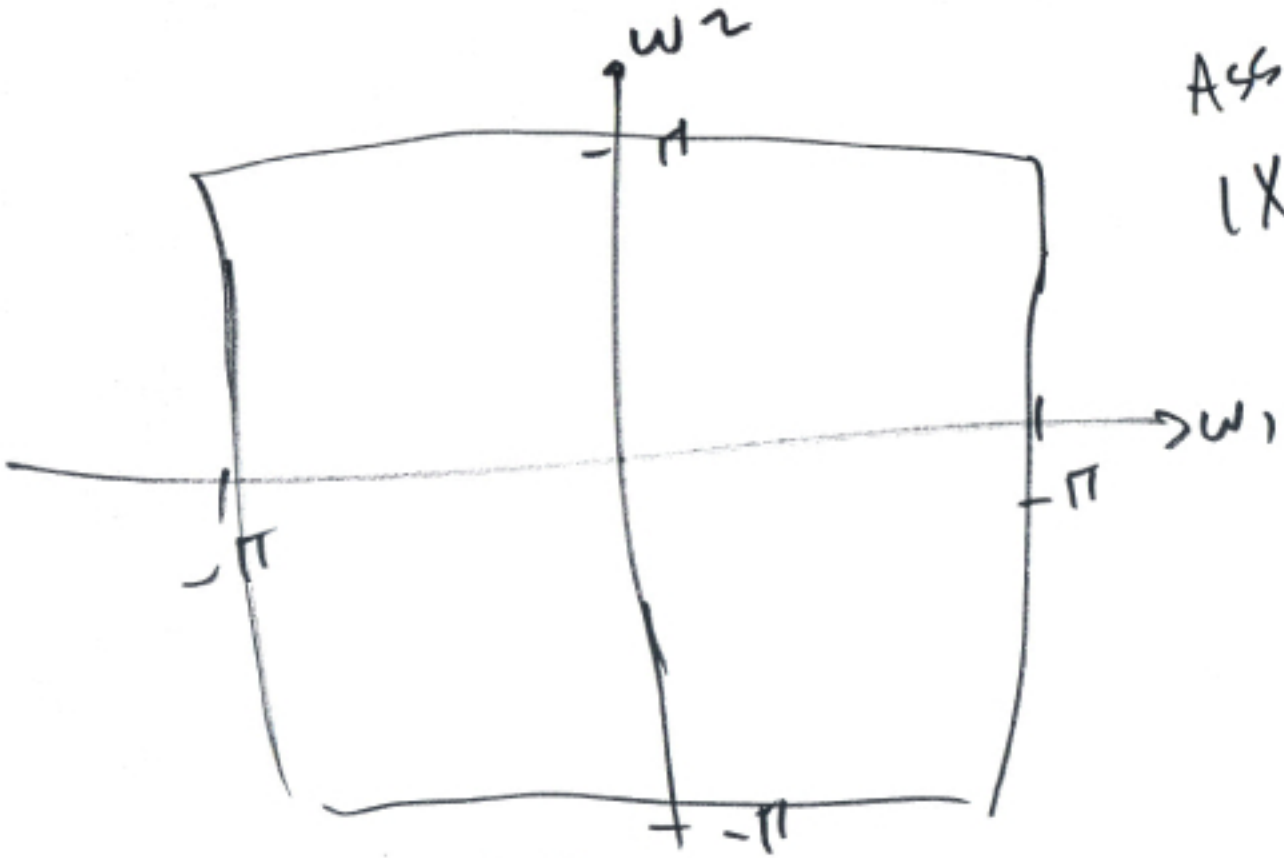

Assume $|X(\omega_1, \omega_2)|^2$

$x(n_1, n_2)$: $N \times N$

$\Rightarrow$ in 2-D, unlike 1-D, most 2D polynomials are <u>irreducible</u> $\longrightarrow$ non factorable.

1982, M. Hayes : If $x(n_1, n_2)$ has irreducible associated polynomials, then all other $y(n)$ which have same F.T.M are <u>equivalent</u> to x. Equivalent means:

$$y(n_1, n_2) \sim x(n_1, n_2) \quad \text{if}$$

$$\cancel{y(n_1, n_2) = e^{j\theta} x(n_1, n_2)}$$

$$y(n_1, n_2) = e^{j\theta} x(k_1 \pm n_1, k_2 \pm n_2)$$

- observation ① : $x(n_1, n_2) \longrightarrow |X(\omega_1, \omega_2)|^2$

$$e^{j\theta} x(n_1, n_2) \longrightarrow |X(\omega_1, \omega_2)|^2$$

- observation ② $x(n_1, n_2) \longrightarrow |X(\omega_1, \omega_2)|^2$

shift by k_1, k_2 in space domain $\Rightarrow$ same FTM

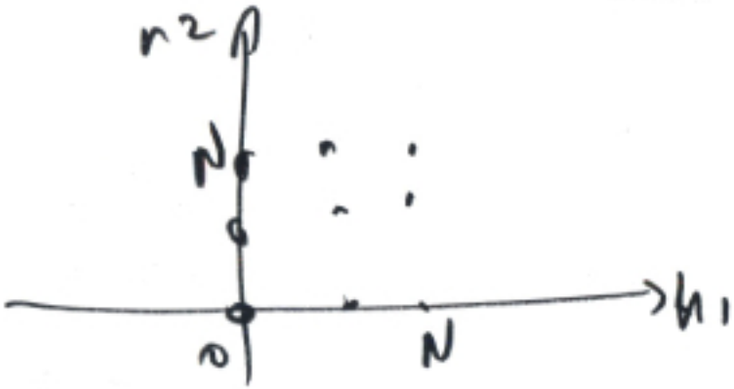

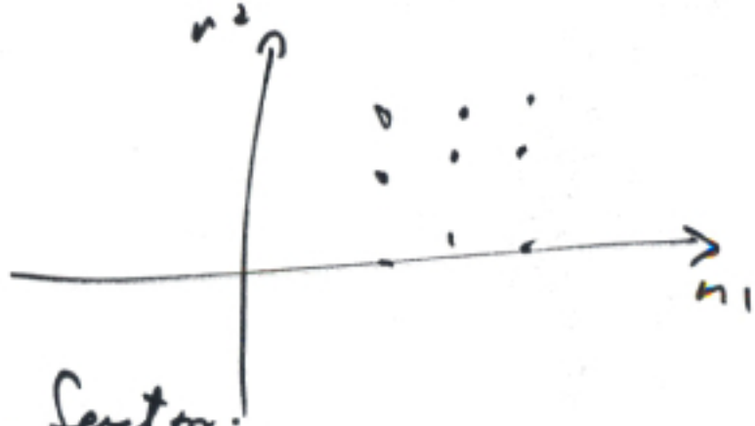

- Observation 3: Rotation factor.

$$x(n_1, n_2) \longrightarrow |X(\omega_1, \omega_2)|^2$$

$$y(n_1, n_2) = x(N - n_1, N - n_2)$$

also has same FTM.

---

① Assume signal $x(n_1, n_2)$ is real

$$e^{j\theta}, \quad \theta = 0, \text{ or } \theta = \pi$$

- Assume signal is positive $\Longrightarrow \theta = 0$

//

(2) - Assumption: extent of $x(n_1, n_2)$ is known.

(3) Z.T of signal x $\Longrightarrow$ irreducible.

Hence $\Longrightarrow$ Nail signal to factor of 2:

either $x(n_1, n_2)$ or $x(N-n_1, N-n_2)$

same FTM.

---

(1) assume x Real, ~~iwe~~ and positive.

Know extent.

FTM can be used to recover either x or its reflection "uniquely"

proposed iterative Alg

Assume know
4N x 4N samples
of $|X(\omega_1, \omega_2)|^2$

N x N $\quad n_1 : 0 \to N-1$
$\quad n_2 : 0 \to N-1$

x is positive real