



EE123

Digital Signal Processing

Lecture 16 Resampling

M. Lustig, EECS UC Berkeley

Topics

- Did you sign up for the ham exam?
- Last time
 - D.T processing of C.T signals
 - C.T processing of D.T signals (ha?????)
 - Downsampling
- Today
 - Changing Sampling Rate via DSP
 - Upsampling
 - Rational resampling
 - Interchanging operations

M. Lustig, EECS UC Berkeley


Review DownSampling

- Much like C/D conversion
- Expect similar effects:
 - Aliasing
 - mitigate by antialiasing filter
- Finely sampled signal \Rightarrow almost continuous
 - Downsample in that case is like sampling!

M. Lustig, EECS UC Berkeley

Changing Sampling-rate via D.T Processing


$$X_d(e^{j\omega}) = \frac{1}{M} \sum_{i=0}^{M-1} X(e^{j(\omega/M - 2\pi i/M)})$$

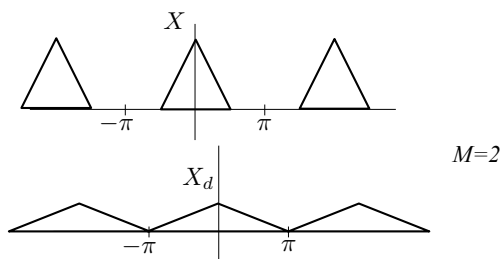

M. Lustig, EECS UC Berkeley



Changing Sampling-rate via D.T Processing

$$X_d(e^{j\omega}) = \frac{1}{M} \sum_{i=0}^{M-1} X(e^{j(\omega/M - 2\pi i/M)})$$

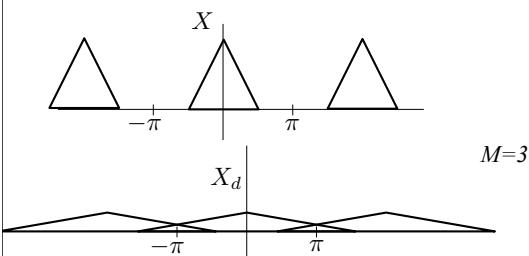

M. Lustig, EECS UC Berkeley

Anti-Aliasing

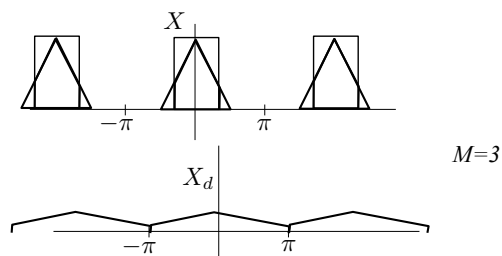

M. Lustig, EECS UC Berkeley

UpSampling

- Much like D/C converter
- Upsample by A LOT \Rightarrow almost continuous
- Intuition:
 - Recall our D/C model: $x[n] \Rightarrow x_s(t) \Rightarrow x_c(t)$
 - Approximate “ $x_s(t)$ ” by placing zeros between samples
 - Convolve with a sinc to obtain “ $x_c(t)$ ”

M. Lustig, EECS UC Berkeley


Up-sampling

$$x[n] = X_c(nT)$$

$$x_i[n] = X_c(nT') \quad \text{where } T' = \frac{T}{L} \quad L \text{ integer}$$

Obtain $x_i[n]$ from $x[n]$ in two steps:


$$(1) \text{ Generate: } x_e = \begin{cases} x[n/L] & n = 0, \pm L, \pm 2L, \dots \\ 0 & \text{otherwise} \end{cases}$$

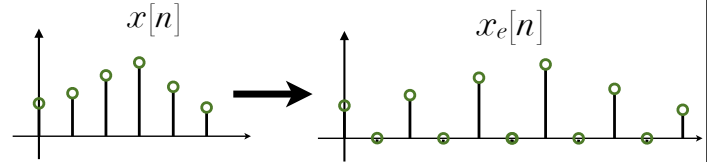

M. Lustig, EECS UC Berkeley

Up-Sampling

(2) Obtain $x_i[n]$ from $x_e[n]$ by bandlimited interpolation:

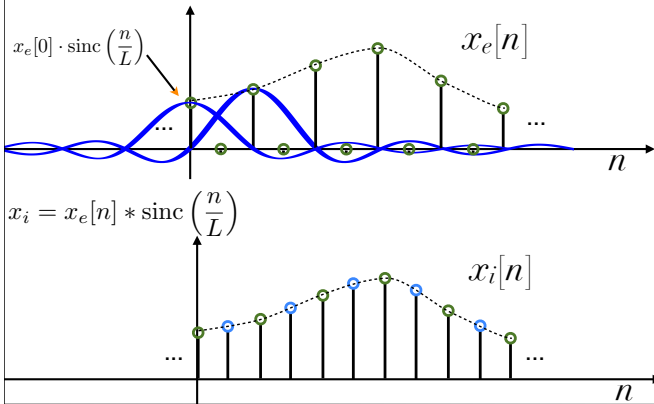

M. Lustig, EECS UC Berkeley

Up-Sampling



$$x_i[n] = x_e[n] * \text{sinc}(n/L)$$

$$x_e[n] = \sum_{k=-\infty}^{\infty} x[k] \delta[n - kL]$$

$$x_i[n] = \sum_{k=-\infty}^{\infty} x[k] \text{sinc}\left(\frac{n - kL}{L}\right)$$


M. Lustig, EECS UC Berkeley

Frequency Domain Interpretation

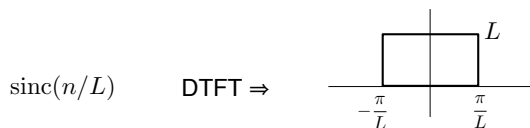

M. Lustig, EECS UC Berkeley

Frequency Domain Interpretation




$$\begin{aligned} X_e(e^{j\omega}) &= \sum_{n=-\infty}^{\infty} \underbrace{x_e[n]}_{\neq 0 \text{ only for } n=mL \text{ (integer } m)} e^{-j\omega n} \\ &= \sum_{m=-\infty}^{\infty} \underbrace{x_e[mL]}_{=x[m]} e^{-j\omega mL} = X(e^{j\omega L}) \end{aligned}$$

Compress DTFT by a factor of L!


M. Lustig, EECS UC Berkeley

Example:

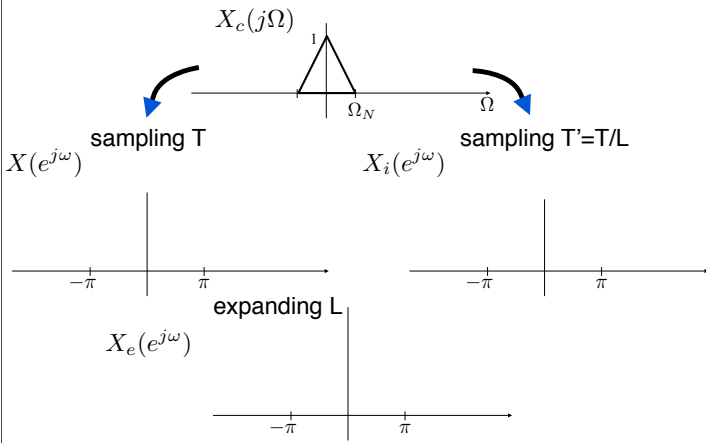


M. Lustig, EECS UC Berkeley

Example:

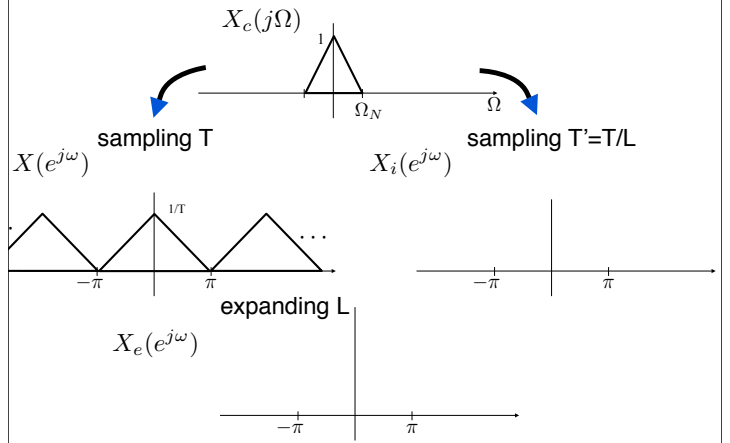


M. Lustig, EECS UC Berkeley

Example:

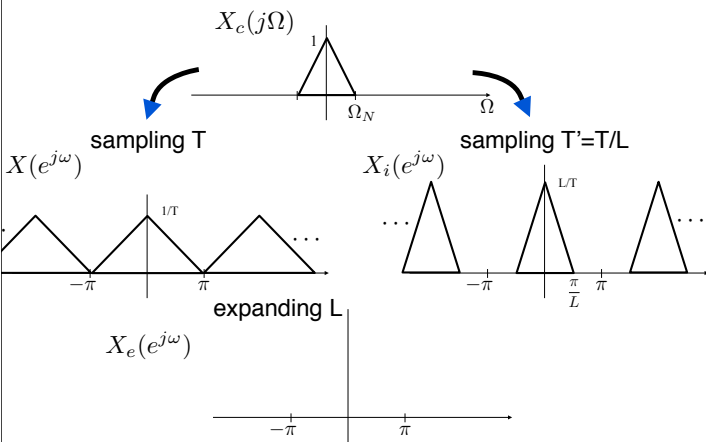


M. Lustig, EECS UC Berkeley

Example:

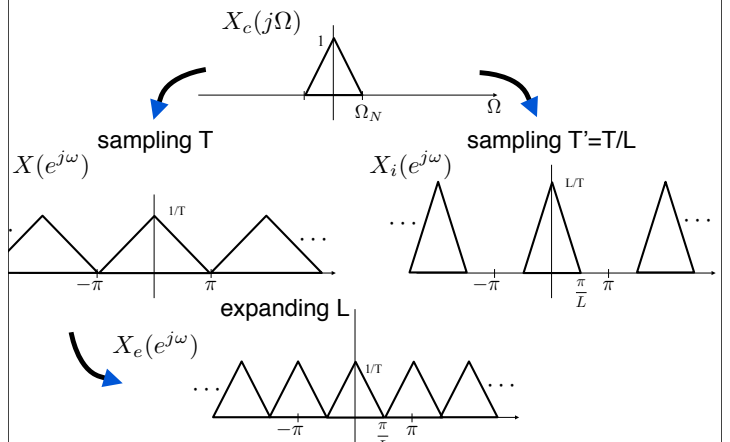

M. Lustig, EECS UC Berkeley


Example:

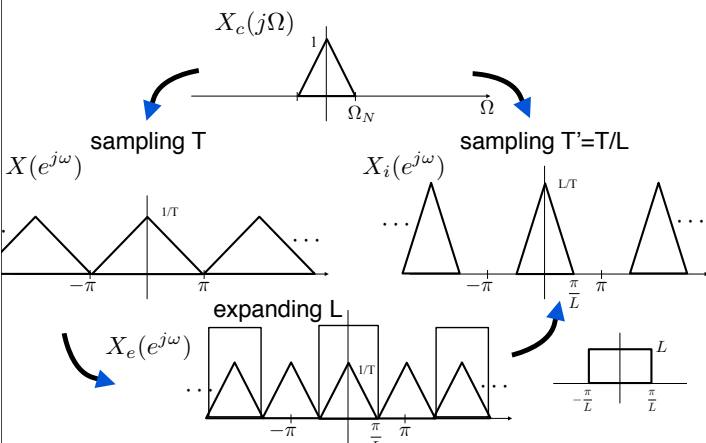

M. Lustig, EECS UC Berkeley

Practical Upsampling


- Can interpolate with simple, practical filters. What's happening?
- Example: $L=3$, linear interpolation - convolve with triangle

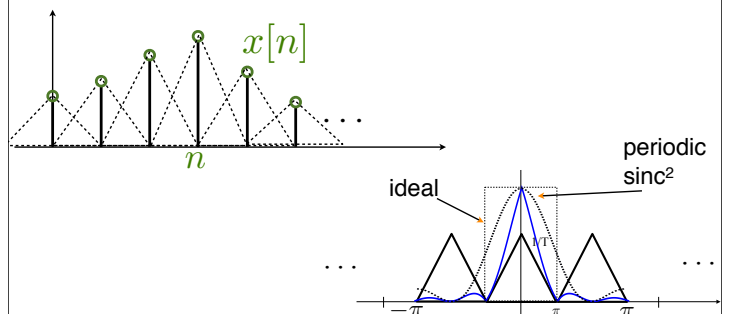


M. Lustig, EECS UC Berkeley

Resampling by non-integer

- $T' = TM/L$ (upsample L, downsample M)




Or,



- What would happen if change order?


Example:

- $L = 2, M=3, T'=3/2T$ (fig 4.30)

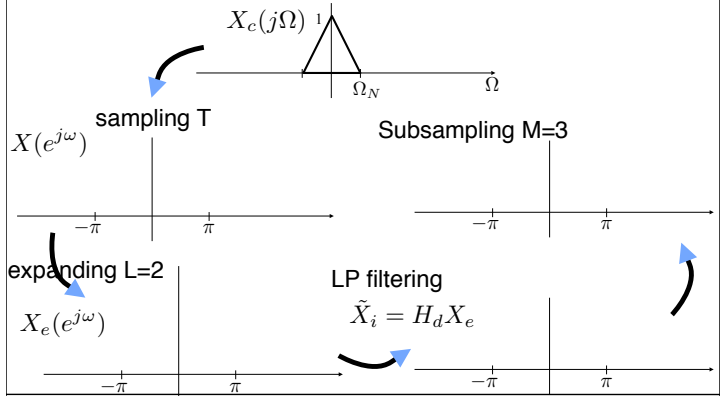

Example:


- $L = 2, M=3, T'=3/2T$ (fig 4.30)

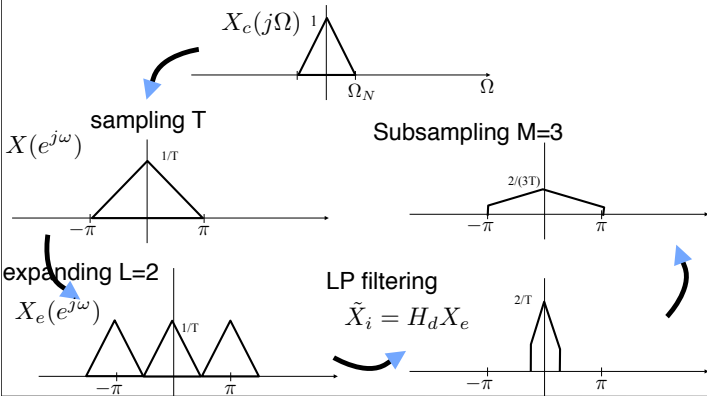


Multi-Rate Signal Processing

- What if we want to resample by $1.01T$?
 - Expand by $L=100$
 - Filter $\pi/101$ (\$\$\$\$\$)
 - Downsample by $M=101$
- Fortunately there are ways around it!
 - Called multi-rate
 - Uses compressors, expanders and filtering


Interchanging Operations




Note:

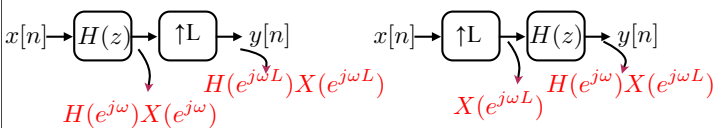

Interchanging Operations



Note:

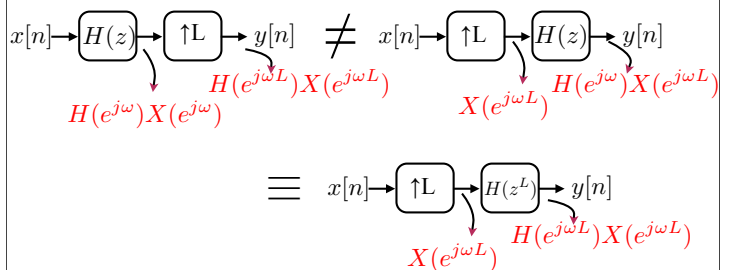

Interchanging Filter Expander

- Q: Can we move expander from Left to Right (with xform)?



- A: Yes, if $H(z)$ is rational
No, otherwise

Example:

