

Foundations of Computer Graphics (Fall 2012)

CS 184, Lecture 24: Radiometry
<http://inst.eecs.berkeley.edu/~cs184>

Many slides courtesy Pat Hanrahan



Overview

- Lighting and shading key in computer graphics
- HW 2 etc. ad-hoc shading models, no units
- Really, want to match physical light reflection
- Next 3 lectures look at this formally
- Today: physical measurement of light: radiometry
- Formal reflection equation, reflectance models
- Global Illumination (later)

Light

Visible electromagnetic radiation

Power spectrum

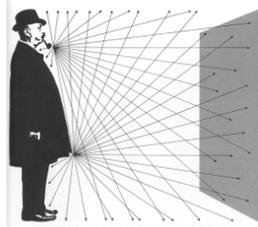

Polarization

Photon (quantum effects)

Wave (interference, diffraction)

CS348B Lecture 4

Pat Hanrahan, 2009

Radiometry and Photometry

- Physical measurement of electromagnetic energy
- Measure spatial (and angular) properties of light
 - Radiant Power
 - Radiant Intensity
 - Irradiance
 - Inverse square and cosine law
 - Radiance
 - Radiant Exitance (Radiosity)
- Reflection functions: Bi-Directional Reflectance Distribution Function or BRDF
- Reflection Equation

Radiant Energy and Power


Power: Watts (radiometry)

vs. Lumens (photometry)

- Φ
- Spectral efficacy
- Energy efficiency

Energy: Joules vs. Talbot

- Exposure
- Film response
- Skin - sunburn

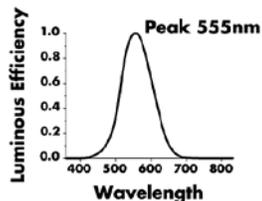

Luminance

$$Y = \int V(\lambda)L(\lambda)d\lambda$$

CS348B Lecture 4


Pat Hanrahan, Spring 2011

Radiant Intensity

Definition: The *radiant (luminous) intensity* is the power per unit solid angle emanating from a point source.

$$I(\omega) \equiv \frac{d\Phi}{d\omega}$$

$$\left[\frac{W}{sr} \right] \left[\frac{lm}{sr} = cd = \text{candela} \right]$$

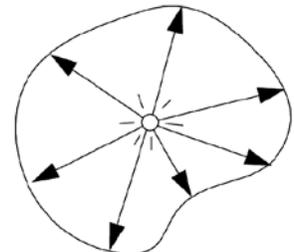

CS348B Lecture 4

Pat Hanrahan, Spring 2011


Angles and Solid Angles

■ Angle $\theta = \frac{l}{r}$

⇒ circle has 2π radians

■ Solid angle $\Omega = \frac{A}{R^2}$


⇒ sphere has 4π steradians



CS348B Lecture 4

Pat Hanrahan, 2009

Differential Solid Angles

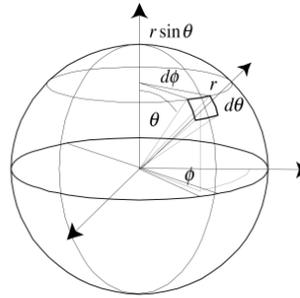


$$dA = (r d\theta)(r \sin \theta d\phi) \\ = r^2 \sin \theta d\theta d\phi$$

CS348B Lecture 4

Pat Hanrahan, 2009

Differential Solid Angles

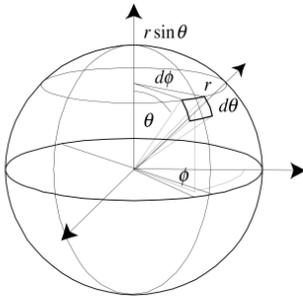


$$dA = (r d\theta)(r \sin \theta d\phi) \\ = r^2 \sin \theta d\theta d\phi$$

$$d\omega = \frac{dA}{r^2} = \sin \theta d\theta d\phi$$

CS348B Lecture 4

Pat Hanrahan, 2009

Differential Solid Angles

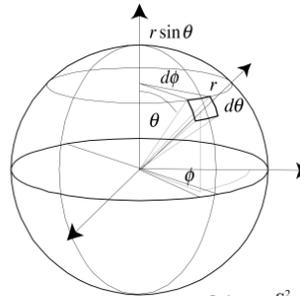

$$d\omega = \sin \theta d\theta d\phi$$


$$\Omega = \int_{S^2} d\omega \\ = \int_0^\pi \int_0^{2\pi} \sin \theta d\theta d\phi \\ = \int_{-1}^1 \int_0^{2\pi} d\cos \theta d\phi \\ = 4\pi$$

Sphere S^2

CS348B Lecture 4

Pat Hanrahan, 2009

Isotropic Point Source

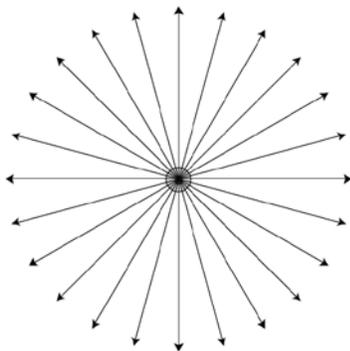


$$\Phi = \int_{S^2} I d\omega \\ = 4\pi I$$

$$I = \frac{\Phi}{4\pi}$$

CS348B Lecture 4

Pat Hanrahan, Spring 2011

Light Source Goniometric Diagrams

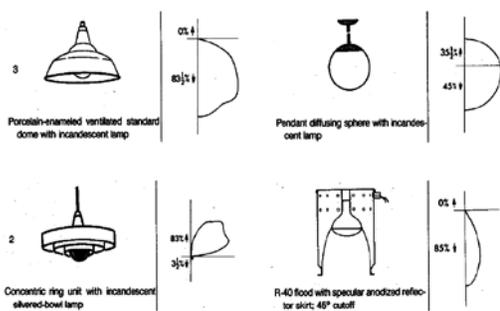

CS348B Lecture 4

Pat Hanrahan, Spring 2011

Radiometry and Photometry

- Physical measurement of electromagnetic energy
- Measure spatial (and angular) properties of light
 - Radiant Power
 - Radiant Intensity
 - Irradiance**
 - Inverse square and cosine law
 - Radiance
 - Radiant Exitance (Radiosity)
- Reflection functions: Bi-Directional Reflectance Distribution Function or BRDF
- Reflection Equation

Beam Power in Terms of Irradiance

$$\Phi = EA$$

$$E = \frac{\Phi}{A}$$


CS348B Lecture 4

Pat Hanrahan, Spring 2011

Irradiance

Definition: The *irradiance (illuminance)* is the power per unit area incident on a surface.

$$E(x) \equiv \frac{d\Phi_i}{dA}$$


$$\left[\frac{W}{m^2} \right] \left[\frac{lm}{m^2} = lux \right]$$

Sometimes referred to as the radiant (luminous) incidence.

CS348B Lecture 4

Pat Hanrahan, Spring 2011

Lambert's Cosine Law

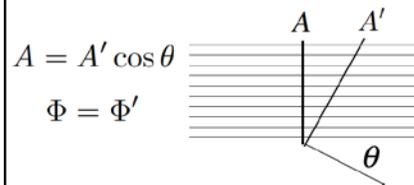


$$E' = \frac{\Phi'}{A'} = \frac{\Phi}{A} \cos \theta = E \cos \theta$$

CS348B Lecture 4

Pat Hanrahan, Spring 2011

Irradiance: Isotropic Point Source

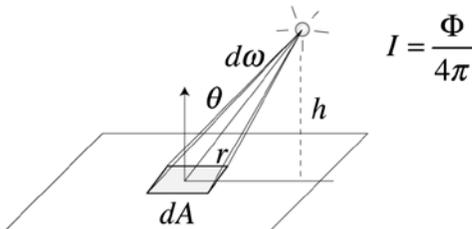

$$I = \frac{\Phi}{4\pi}$$


$$I d\omega = \frac{\Phi}{4\pi} \frac{\cos \theta}{r^2} dA = E dA$$

$$E = \frac{\Phi \cos \theta}{4\pi r^2}$$

CS348B Lecture 4

Pat Hanrahan, Spring 2011

The Invention of Photometry

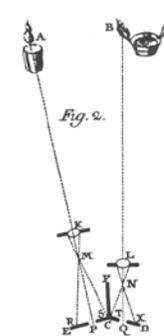

Bouguer's classic experiment

- Compare a light source and a candle
- Move until they both appear equally bright
- Intensity is proportional to ratio of distances squared

Definition of a candela

- Originally a "standard" candle
- Currently 550 nm laser w/ 1/683 W/sr
- 1 of 6 fundamental SI units

CS348B Lecture 4

Pat Hanrahan, Spring 2011

Typical Values of Illuminance [lm/m²]

Sunlight plus skylight	100,000 lux
Sunlight plus skylight (overcast)	10,000
Interior near window (daylight)	1,000
Artificial light (minimum)	100
Moonlight (full)	0.02
Starlight	0.0003

CS348B Lecture 4

Pat Hanrahan, Spring 2011

Radiometry and Photometry


- Physical measurement of electromagnetic energy
- Measure spatial (and angular) properties of light
 - Radiant Power
 - Radiant Intensity
 - Irradiance
 - Inverse square and cosine law
 - Radiance**
 - Radiant Exitance (Radiosity)
- Reflection functions: Bi-Directional Reflectance Distribution Function or BRDF
- Reflection Equation

Radiance

- Power per unit projected area perpendicular to the ray per unit solid angle in the direction of the ray

- Symbol: $L(x, \omega)$ (W/m² sr)

- Flux given by $d\Phi = L(x, \omega) \cos \theta \, d\omega \, dA$



Area Lights – Surface Radiance

Definition: The surface *radiance (luminance)* is the intensity per unit area leaving a surface

$$L(x, \omega) \equiv \frac{dI(x, \omega)}{dA} = \frac{d^2\Phi(x, \omega)}{d\omega dA}$$

$$\left[\frac{W}{sr \, m^2} \right] \left[\frac{cd}{m^2} = \frac{lm}{sr \, m^2} = nit \right]$$

CS348B Lecture 4

Pat Hanrahan, Spring 2011

Typical Values of Luminance [cd/m²]

Surface of the sun	2,000,000,000 nit
Sunlight clouds	30,000
Clear sky	3,000
Overcast sky	300
Moon	0.03

CS348B Lecture 4

Pat Hanrahan, Spring 2011

Radiance properties

- Radiance constant as propagates along ray
 - Derived from conservation of flux
 - Fundamental in Light Transport.

$$d\Phi_1 = L_1 d\omega_1 dA_1 = L_2 d\omega_2 dA_2 = d\Phi_2$$

$$d\omega_1 = dA_2 / r^2 \quad d\omega_2 = dA_1 / r^2$$

$$d\omega_1 dA_1 = \frac{dA_1 dA_2}{r^2} = d\omega_2 dA_2$$

$$\therefore L_1 = L_2$$

Quiz

Does radiance increase under a magnifying glass?

No!!

CS348B Lecture 4 Pat Hanrahan, Spring 2002

Quiz

Does the brightness that a wall appears to the eye depend on the distance of the viewer to the wall?

No!!

CS348B Lecture 4 Pat Hanrahan, Spring 2002

Radiance properties

- Sensor response proportional to radiance (constant of proportionality is throughput)
 - Far surface: See more, but subtend smaller angle
 - Wall equally bright across viewing distances

Consequences

- Radiance associated with rays in a ray tracer
- Other radiometric quants derived from radiance

Irradiance, Radiosity

- Irradiance E is radiant power per unit area
- Integrate incoming radiance over hemisphere
 - Projected solid angle ($\cos \theta d\omega$)
 - Uniform illumination: Irradiance = π [CW 24,25]
 - Units: W/m^2
- Radiant Exitance (radiosity)
 - Power per unit area leaving surface (like irradiance)

Figure 2.3: Projection of differential area.

Irradiance from the Environment

$$d^2\Phi_i(x, \omega) = L_i(x, \omega) \cos \theta dA d\omega$$

$$dE(x, \omega) = L_i(x, \omega) \cos \theta d\omega$$

Light meter

$$E(x) = \int_{H^2} L_i(x, \omega) \cos \theta d\omega$$

CS348B Lecture 4 Pat Hanrahan, 2007

Uniform Area Source

$$E(x) = \int_{H^2} L \cos \theta d\omega$$

$$= L \int_{\Omega} \cos \theta d\omega$$

$$= L \tilde{\Omega}$$

CS348B Lecture 5 Pat Hanrahan, 2009

Uniform Disk Source

Geometric Derivation

$\tilde{\Omega} = \pi \sin^2 \alpha$

Algebraic Derivation

$$\tilde{\Omega} = \int_0^{\cos \alpha} \int_0^{2\pi} \cos \theta \, d\phi \, d \cos \theta$$

$$= 2\pi \frac{\cos^2 \theta}{2} \Big|_1^{\cos \alpha}$$

$$= \pi \sin^2 \alpha$$

$$= \pi \frac{r^2}{r^2 + h^2}$$

CS348B Lecture 5 Pat Hanrahan, 2009

Irradiance Environment Maps

Incident Radiance
(Illumination Environment Map)

Irradiance Environment Map

Radiant Exitance

Definition: The *radiant (luminous) exitance* is the energy per unit area leaving a surface.

$$M(x) \equiv \frac{d\Phi_o}{dA}$$

$$\left[\frac{W}{m^2} \right] \left[\frac{lm}{m^2} = lux \right]$$

In computer graphics, this quantity is often referred to as the *radiosity (B)*

CS348B Lecture 4 Pat Hanrahan, Spring 2011

Directional Power Leaving a Surface

$$d^2\Phi_o(x, \omega) = L_o(x, \omega) \cos \theta dA d\omega$$

Note cosine

CS348B Lecture 4 Pat Hanrahan, Spring 2011

Radiometry and Photometry

- Physical measurement of electromagnetic energy
- Measure spatial (and angular) properties of light
 - Radiant Power
 - Radiant Intensity
 - Irradiance
 - Inverse square and cosine law
 - Radiance
 - Radiant Exitance (Radiosity)
- Reflection functions: Bi-Directional Reflectance Distribution Function or BRDF
- Reflection Equation

Types of Reflection Functions

- Ideal Specular**
 - Reflection Law
 - Mirror
- Ideal Diffuse**
 - Lambert's Law
 - Matte
- Specular**
 - Glossy
 - Directional diffuse

CS348B Lecture 10 Pat Hanrahan, Spring 2009

Materials



Plastic

Metal


Matte

From Apodaca and Gritz, *Advanced RenderMan*

CS348B Lecture 10

Pat Hanrahan, Spring 2009

Spheres [Matusik et al.]

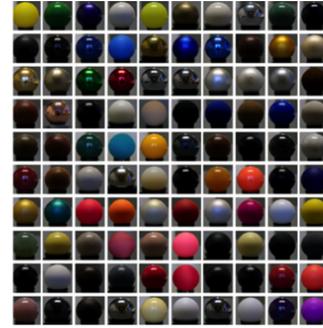

CS348B Lecture 10


Pat Hanrahan, Spring 2009

Building up the BRDF

- Bi-Directional Reflectance Distribution Function [Nicodemus 77]
- Function based on incident, view direction
- Relates incoming light energy to outgoing
- Unifying framework for many materials

The BRDF

Bidirectional Reflectance-Distribution Function

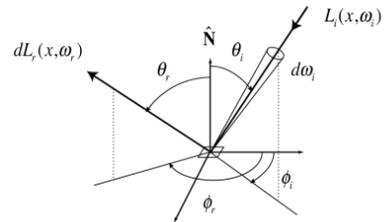

$$f_r(\omega_i \rightarrow \omega_r) \equiv \frac{dL_r(\omega_i \rightarrow \omega_r)}{dE_i} \left[\frac{1}{sr} \right]$$

CS348B Lecture 10

Pat Hanrahan, Spring 2009

BRDF


- Reflected Radiance proportional Irradiance
- Constant proportionality: BRDF
- Ratio of outgoing light (radiance) to incoming light (irradiance)
 - Bidirectional Reflection Distribution Function
 - (4 Vars) units 1/sr

$$f(\omega_i, \omega_r) = \frac{L_r(\omega_r)}{L(\omega_i) \cos \theta d\omega_i}$$

$$L_r(\omega_r) = L(\omega_i) f(\omega_i, \omega_r) \cos \theta d\omega_i$$

Properties of BRDF's


1. Linearity

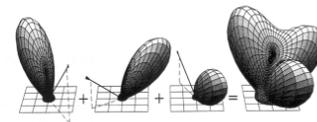

From Sillion, Arvo, Westin, Greenberg

2. Reciprocity principle

$$f_r(\omega_r \rightarrow \omega_i) = f_r(\omega_i \rightarrow \omega_r)$$

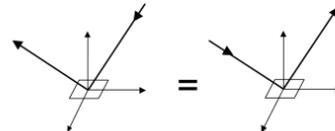


CS348B Lecture 10

Pat Hanrahan, Spring 2009

Properties of BRDF's

3. Isotropic vs. anisotropic

$$f_r(\theta_i, \phi_i; \theta_r, \phi_r) = f_r(\theta_r, \theta_i, \phi_r, -\phi_i)$$

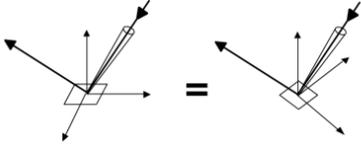

Reciprocity and isotropy

$$f_r(\theta_i, \theta_r, \phi_r, -\phi_i) = f_r(\theta_r, \theta_i, \phi_i, -\phi_r) = f_r(\theta_i, \theta_r, |\phi_r - \phi_i|)$$


4. Energy conservation

CS348B Lecture 10


Pat Hanrahan, Spring 2009

Isotropic vs Anisotropic

- Isotropic: Most materials (you can rotate about normal without changing reflections)
- Anisotropic: brushed metal etc. preferred tangential direction



Isotropic

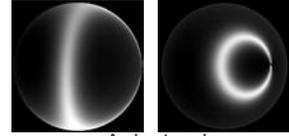


Anisotropic

Radiometry and Photometry

- Physical measurement of electromagnetic energy
- Measure spatial (and angular) properties of light
 - Radiant Power
 - Radiant Intensity
 - Irradiance
 - Inverse square and cosine law
 - Radiance
 - Radiant Exitance (Radiosity)
- Reflection functions: Bi-Directional Reflectance Distribution Function or BRDF
- Reflection Equation (and simple BRDF models)


Reflection Equation

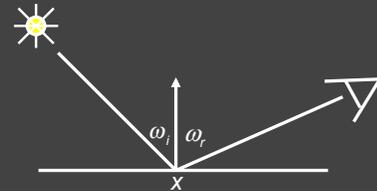

$$L_r(x, \omega_r) = L_e(x, \omega_r) + L_i(x, \omega_i) f(x, \omega_i, \omega_r) (\omega_i \cdot n)$$

Reflected Light (Output Image) Emission Incident Light (from light source) BRDF Cosine of Incident angle

Reflection Equation

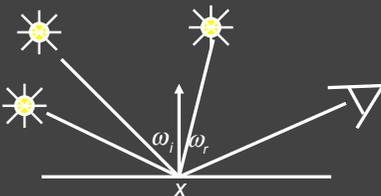


Sum over all light sources

$$L_r(x, \omega_r) = L_e(x, \omega_r) + \sum L_i(x, \omega_i) f(x, \omega_i, \omega_r) (\omega_i \cdot n)$$

Reflected Light (Output Image) Emission Incident Light (from light source) BRDF Cosine of Incident angle

Reflection Equation

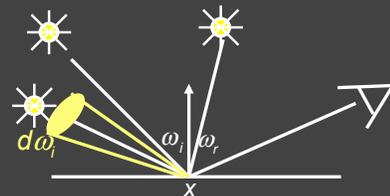

Replace sum with integral

$$L_r(x, \omega_r) = L_e(x, \omega_r) + \int_{\Omega} L_i(x, \omega_i) f(x, \omega_i, \omega_r) \cos \theta_i d\omega_i$$


Reflected Light (Output Image) Emission Incident Light (from light source) BRDF Cosine of Incident angle

Energy Conservation

$$\frac{d\Phi_r}{d\Phi_i} = \frac{\int_{\Omega_r} L_r(\omega_r) \cos \theta_r d\omega_r}{\int_{\Omega_i} L_i(\omega_i) \cos \theta_i d\omega_i}$$

$$= \frac{\int_{\Omega_r, \Omega_i} f_r(\omega_i \rightarrow \omega_r) L_i(\omega_i) \cos \theta_i d\omega_i \cos \theta_r d\omega_r}{\int_{\Omega_i} L_i(\omega_i) \cos \theta_i d\omega_i}$$


$$\leq 1$$




CS348B Lecture 10

Pat Hanrahan, Spring 2009


BRDF Viewer plots




Diffuse



Torrance-Sparrow




Anisotropic



by written by Szymon Rusinkiewicz

Ideal Diffuse Reflection

Assume light is equally likely to be reflected in any output direction (independent of input direction).



$$\begin{aligned} L_{r,d}(\omega_r) &= \int_{\Omega_i} f_{r,d} L_i(\omega_i) \cos \theta_i d\omega_i \\ &= f_{r,d} \int_{\Omega_i} L_i(\omega_i) \cos \theta_i d\omega_i \\ &= f_{r,d} E \end{aligned}$$

$$M = \int L_r(\omega_r) \cos \theta_r d\omega_r = L_r \int \cos \theta_r d\omega_r = \pi L_r$$


$$\rho_d = \frac{M}{E} = \frac{\pi L_r}{E} = \frac{\pi f_{r,d} E}{E} = \pi f_{r,d} \Rightarrow f_{r,d} = \frac{\rho_d}{\pi}$$

Lambert's Cosine Law $M = \rho_d E = \rho_d E_i \cos \theta_i$

CS348B Lecture 10

Pat Hanrahan, Spring 2002

Phong Model

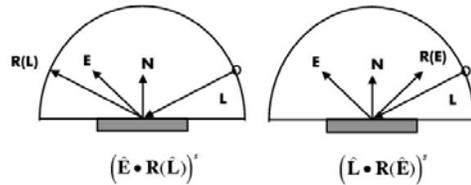

$$\text{Reciprocity: } (\hat{E} \cdot \mathbf{R}(\hat{L}))^2 = (\hat{L} \cdot \mathbf{R}(\hat{E}))^2$$


Distributed light source!

CS348B Lecture 10

Pat Hanrahan, Spring 2002


Fresnel Reflectance

Metal (Aluminum)

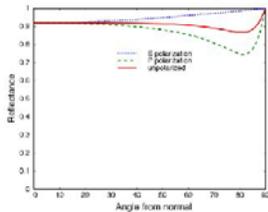

Gold $F(0)=0.82$
Silver $F(0)=0.95$

Dielectric (N=1.5)

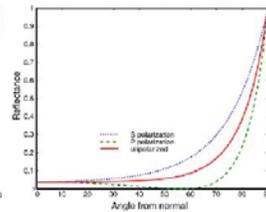

Glass $n=1.5$ $F(0)=0.04$
Diamond $n=2.4$ $F(0)=0.15$

$$\text{Schlick Approximation } F(\theta) = F(0) + (1 - F(0))(1 - \cos \theta)^5$$

CS348B Lecture 10

Pat Hanrahan, Spring 2002

Experiment

Reflections from a shiny floor



From Lafortune, Foo, Torrance, Greenberg, SIGGRAPH 97

CS348B Lecture 10

Pat Hanrahan, Spring 2002

Analytical BRDF: TS example

- One famous analytically derived BRDF is the Torrance-Sparrow model
- T-S is used to model specular surface, like Phong
 - more accurate than Phong
 - has more parameters that can be set to match different materials
 - derived based on assumptions of underlying geometry. (instead of 'because it works well')

Torrance-Sparrow

- Assume the surface is made up grooves at microscopic level.



- Assume the faces of these grooves (called microfacets) are perfect reflectors.
- Take into account 3 phenomena



Shadowing Masking Interreflection

Torrance-Sparrow Result

Fresnel term: allows for wavelength dependency

Geometric Attenuation: reduces the output based on the amount of shadowing or masking that occurs.

$$f = \frac{F(\theta_i)G(\omega_i, \omega_r)D(\theta_h)}{4 \cos(\theta_i)\cos(\theta_r)}$$

How much of the macroscopic surface is visible to the light source

How much of the macroscopic surface is visible to the viewer

Distribution: distribution function determines what percentage of microfacets are oriented to reflect in the viewer direction.

Other BRDF models

- Empirical: Measure and build a 4D table
- Anisotropic models for hair, brushed steel
- Cartoon shaders, funky BRDFs
- Capturing spatial variation
- Very active area of research


Environment Maps

- Light as a function of direction, from entire environment
- Captured by photographing a chrome steel or mirror sphere
- Accurate only for one point, but distant lighting same at other scene locations (typically use only one env. map)



Blinn and Newell 1976, Miller and Hoffman, 1984
Later, Greene 86, Cabral et al. 87

Reflection Equation

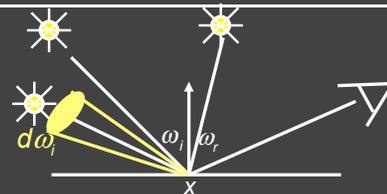

Replace sum with integral

$$L_r(x, \omega_r) = L_e(x, \omega_r) + \int_{\Omega} L_i(x, \omega_i) f(x, \omega_i, \omega_r) \cos \theta_i d\omega_i$$

Reflected Light (Output Image) Emission Environment Map (continuous) BRDF Cosine of Incident angle

Environment Maps

- Environment maps widely used as lighting representation
- Many modern methods deal with offline and real-time rendering with environment maps
- Image-based complex lighting + complex BRDFs

Demo

