CS 268: Active Networks

Ion Stoica May 1, 2003

(* Based on David Wheterall presentation from SOSP '99)

Motivations

- Changes in the network happen very slowly
- Why?
 - Network services are end-to-end
 - At the limit, a service has to be supported by all routers along the path
 - Chicken-and-egg problem: if there aren't enough routers supporting the service, end-hosts won't benefit
 - Internet network is a shared infrastructure
 - Need to achieve consensus (IETF)

istoica@cs.berkeley.edu

2


Motivations


- Proposed changes that haven't happened yet on a large scale:
 - Support for congestion control (RED '93)
 - IP security (IPSEC '93)
 - More addresses (IPv6 '91)
 - Multicast (IP multicast '90)


Coals
• Anake it easy to deploy new functionalities in the network -> accelerate the pace of innovation.
• Alow users to customize their services


istoica@cs.berkeley.edu

3

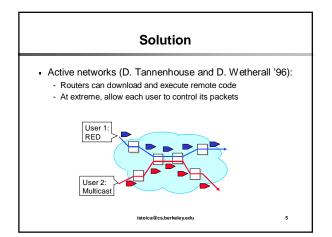


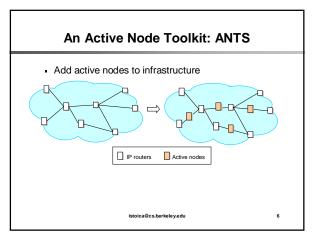


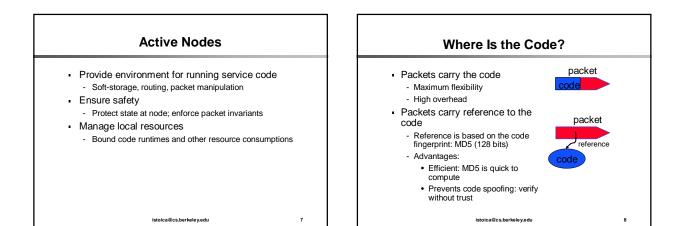

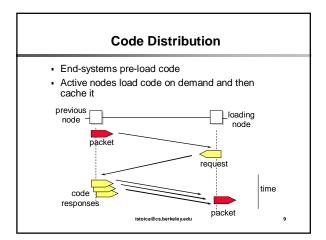

Lesson Learned	
 Applications Performance Security and resource management 	
istoica@cs.berkeley.edu	10

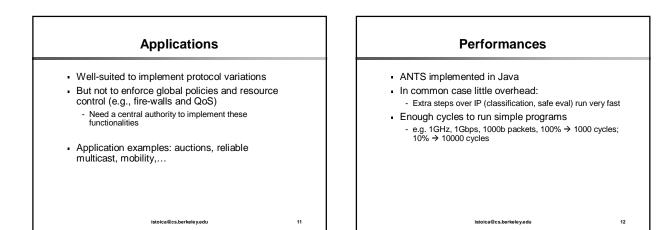

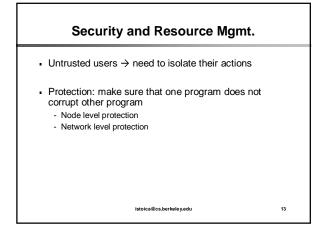

Node Level Protection

Relatively easy to solve

- Allocate resources among users and control their usage
 Fair Queueing, per-flow buffer allocation
- Use light weight mechanisms: sand-box, safe-type languages, Proof Carrying Code (PCC):
- PCC can also provide timeliness guarantees e.g., can demonstrate that an operation cannot take more time/space than a predifined constant
- Note: fundamental trade-off between protection and flexibility
 Example: if a node uses FQ to provide bandwidth protection, it will constrain the delays experienced by a user

istoica@cs.berkeley.edu

16

14

Network Level Protection

- More difficult to achieve
- Challenge: enforce global behavior of a program only with local checks and control
- Main problem: programs very flexible. Active nodes can:
 - Affect routing behavior (e.g., mobile IP)
 - Generate new packets (e.g. multicast)


istoica@cs.berkeley.edu

15

Examples

- Loops as a result of routing changes
- Resource wastage as a result of misbehaving multicast programs
 - Multicast height k, a node can generate up to m copies → total number of packets can be O(m^k) !
- Local solutions not enough
 - TTL too weak; unaware about topology
 - Fair Queueing offers only local protection

istoica@cs.berkeley.edu

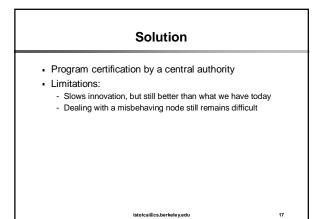



- Allow only administrators, or privileged users to inject code
 - Router plugins, active bridge
- Restrict affecting only the control plane → increase network manageability
 - SmartPackets
 - Netscript

istoica@cs.berkeley.edu

18

20

Active Networks vs. Overlay Networks

- Key difference:
 - Active nodes operate at the network layer; overlay nodes operate at the application layer
 - Active network leverage IP routing between active nodes; Overlay networks control routing between overlay nodes
 Active Networks advantages:
- Active Networks advantages:
 - Efficiency: no need to tunnel packets; no need to process packets at layers other than the network layer
- Overlay Network advantages:
 - Easier to deploy: no need to integrate overlay nodes in the network infrastructure
 - Active nodes have to collaborated (be trusted) by the other routers in the same AS (they need to exchange routing info)

19

istoica@cs.berkeley.edu

Conclusions

- Active networks
 - A revolutionary paradigm
- Explores a significant region of the networking architecture design space
- But is the network layer the right level to deploy it?
 - Maybe, but only if all (congested) routers are active...
 - Otherwise, overlays might be good enough...

istoica@cs.berkeley.edu