
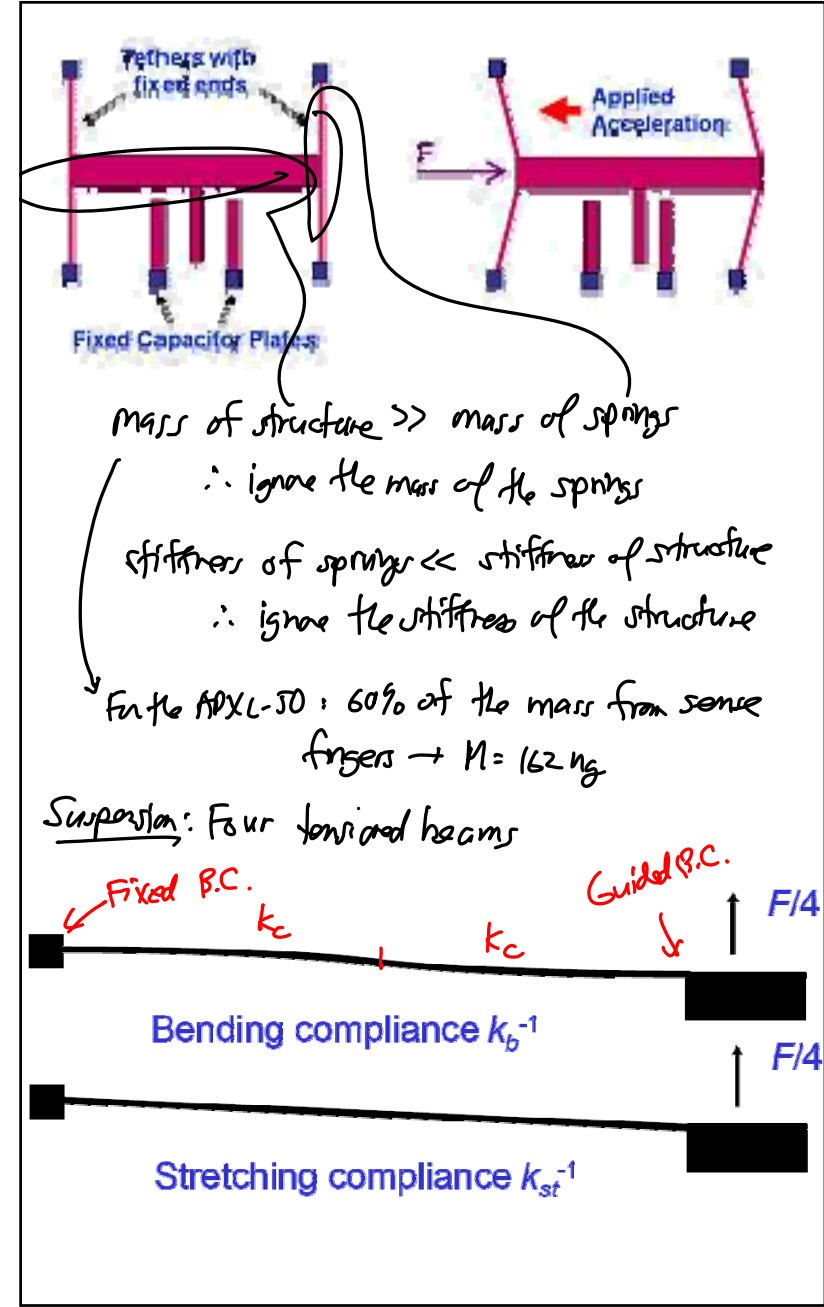


Lecture 19: Resonance Frequency

- Announcements:
- HW#6 will be online soon
- Pass out project today (near end of class)
- Pass back graded midterms today and discussing grading (near end of class)
- -----
- Reading: Senturia, Chpt. 10: §10.5, Chpt. 19
- Lecture Topics:
 - ↳ Estimating Resonance Frequency
 - ↳ Lumped Mass-Spring Approximation
 - ↳ ADXL-50 Resonance Frequency
 - ↳ Distributed Mass & Stiffness
 - ↳ Folded-Beam Resonator
 - ↳ Resonance Frequency Via Differential Equations
- -----
- Last Time:
- The proof mass of the ADXL-50 is many times larger than the effective mass of its suspension beams
 - ↳ Can ignore the mass of the suspension beams (which greatly simplifies the analysis)
- Suspension Beam: $L = 260 \mu\text{m}$, $h = 2.3 \mu\text{m}$, $W = 2 \mu\text{m}$

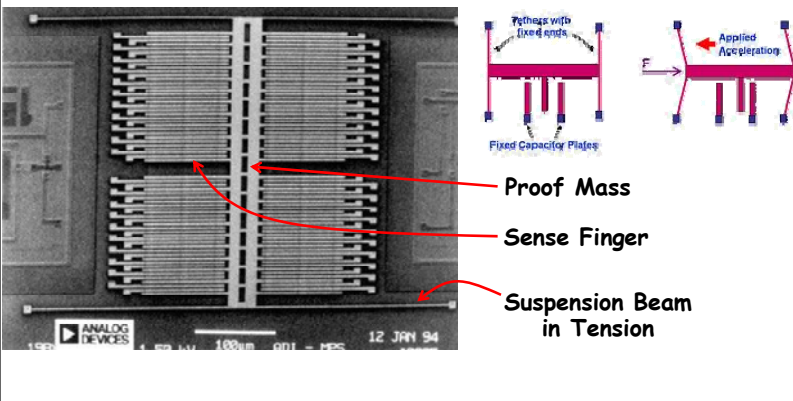

Bending Contribution

$$k_b^{-1} = \left(\frac{1}{k_c} + \frac{1}{k_c} \right) = 2 \left(\frac{(L/2)^3}{3E(Wh^3/12)} \right) = \frac{L^3}{EWh^3}$$

Stretching Contribution

$\approx 4.2 \mu\text{m}/\text{N}$
 $\approx \tan \theta$
 $F_y = S \sin \theta \approx S \theta \approx S \left(\frac{y}{L} \right) = \left(\frac{S}{L} \right) y$
[assume small displacement] $\rightarrow k_{st}$

$k_{st}^{-1} = \frac{L}{S} = \frac{L}{\sigma_r Wh} = 1.14 \mu\text{m}/\mu\text{N}$ stretching stiffness

To get the total spring constant
add to bending stiffness
to the stretching:

$$k = 4(k_b + k_{st}) = 4(0.24 + 0.88) = 4.5 \mu\text{N}/\mu\text{m}$$

Now, get resonance freq.:

$$f = \frac{1}{2\pi} \sqrt{\frac{k}{m}} = \frac{1}{2\pi} \sqrt{\frac{4.48 \text{ N/m}}{162 \times 10^{-12} \text{ kg}}} = 26.5 \text{ kHz}$$

ADXL-50 Data sheet: $f_0 = 24 \text{ kHz}$ difference?
Capacitive transducer
electrical stiffness

Find Resonance Frequency When Mass & Stiffness is Distributed

- Vibrating structure displacement function:

$$y(x,t) = \hat{y}(x) \cos(\omega t)$$

Maximum displacement function (i.e., mode shape function) Seen when velocity $\dot{y}(x,t) = 0$
- Procedure for determining resonance frequency:
 - Use the static displacement of the structure as a trial function and find the strain energy W_{max} at the point of maximum displacement (e.g., when $t=0, \pi/\omega, \dots$)
 - Determine the maximum kinetic energy when the beam is at zero displacement (e.g., when it experiences its maximum velocity)
 - Equate energies and solve for frequency

Get Maximum Kinetic Energy


velocity: $v(x,t) = \frac{\partial y(x,t)}{\partial t} = -\omega \hat{y}(x) \sin(\omega t)$
largest velocity $y(x,t) = 0$

Velocity topographical mapping

When $y(x,t) = 0$, all the energy in the structure is kinetic ($W = 0$)

$$v(x, \frac{(2m+1)\pi}{2\omega}) = -\omega \hat{y}(x)$$

$$t = \frac{\pi}{2\omega}, \frac{3\pi}{2\omega}, \dots$$

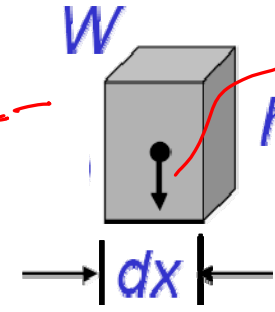

velocity: $v = -w \hat{y}(x)$

$$dK = \frac{1}{2} \cdot dm \cdot [v(x,t)]^2$$

$$dm = \rho (Wh dx)$$

density

Maximum K.E:

$$K_{max} = \int_0^L \frac{1}{2} \rho Wh dx v^2(x,t) = \int_0^L \frac{1}{2} \rho Wh w^2 [\hat{y}(x)]^2 dx$$


To get frequency:

$$K_{max} = W_{max}$$

$$\omega = \sqrt{\frac{W_{max}}{\int_0^L \frac{1}{2} \rho Wh [\hat{y}(x)]^2 dx}} \quad [\text{radians/s}]$$

ω : radian resonance freq.
 W_{max} : maximum potential energy
 ρ : density of the structural material
 W : beam width
 h : " thickness
 $\hat{y}(x)$: resonance mode shape

Resonance Freq. of a Folded-Beam Resonator

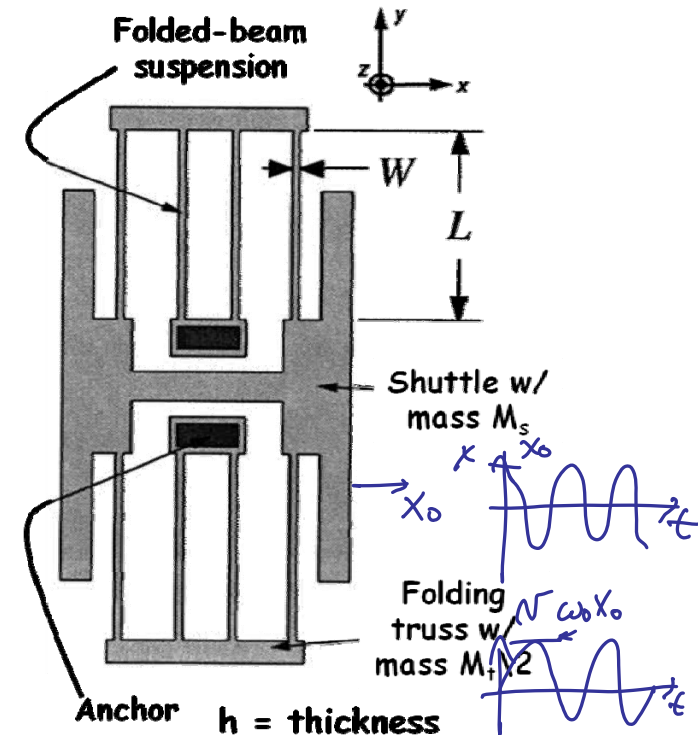

- Derive an expression for the resonance frequency of the above structure

Use the Rayleigh-Ritz Method: (energy method)

$$KE_{max} = PE_{max}$$

Find the kinetic energy \rightarrow one piece @ a time:

$$KE_{max} = \underbrace{KE_s}_{\text{shuttle}} + \underbrace{KE_t}_{\text{truss}} + \underbrace{KE_b}_{\text{beams}}$$

$$KE_{max} = \frac{1}{2} N_s^2 M_s + \frac{1}{2} N_t^2 M_t + \frac{1}{2} \int N_b^2 dM_b$$


Velocity of Shuttle: $N_s = \omega_0 X_0$
 ↑ resonance freq. ↑ maximum displacement of the shuttle

$$\therefore KE_s = \frac{1}{2} N_s^2 M_s = \frac{1}{2} \omega_0^2 X_0^2 M_s$$

Velocity of Truss: $N_t = \frac{1}{2} N_s = \frac{1}{2} \omega_0 X_0$

$\therefore KE_t = \frac{1}{2} \left(\frac{1}{2} \omega_0 X_0\right)^2 M_t = \frac{1}{8} \omega_0^2 X_0^2 M_t$
 ↑ mass of both trusses

Velocity of the Beam Segments:

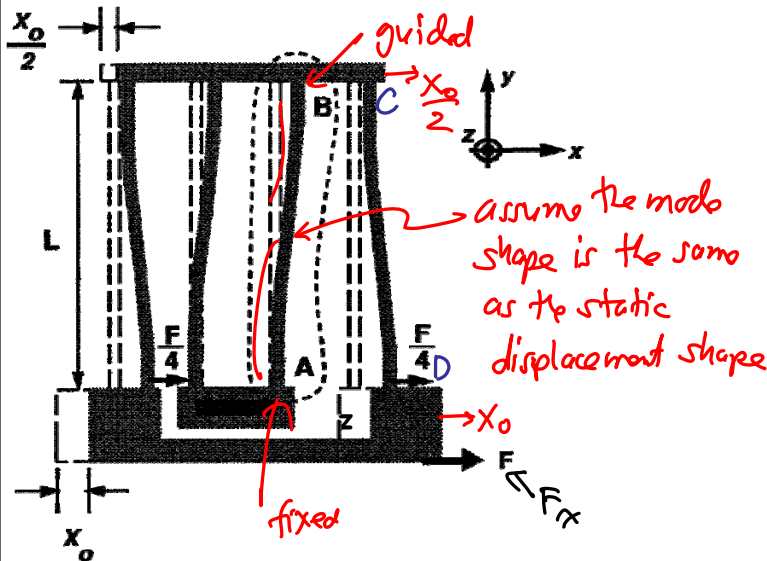

Segment [AB]:

$$\hat{x}(y) = \frac{F_x}{48EI_z} (3Ly^2 - 2y^3), \quad 0 \leq y \leq L \quad (1)$$

At $y=L$: $v(L) = \frac{X_0}{2} = \frac{F_x L^3}{48EI_z} \leftarrow \text{B.C.}$

Substitute into (1):

$$\hat{x}(y) = \frac{X_0}{2} \left[3\left(\frac{y}{L}\right)^2 - 2\left(\frac{y}{L}\right)^3 \right]$$

which yields for velocity:

$$v_b(y)|_{[AB]} = \frac{X_0}{2} \left[3\left(\frac{y}{L}\right)^2 - 2\left(\frac{y}{L}\right)^3 \right] \omega_0$$

Plugging into the expression for KE:

$$KE_{[AB]} = \frac{1}{2} \int_0^L \frac{X_0^2 \omega_0^2}{4} \left[3\left(\frac{y}{L}\right)^2 - 2\left(\frac{y}{L}\right)^3 \right]^2 dM_{[AB]}$$

$$= \frac{X_0^2 \omega_0^2}{8} \int_0^L \left[3\left(\frac{y}{L}\right)^2 - 2\left(\frac{y}{L}\right)^3 \right]^2 dy$$

$M_{[AB]} = \text{mass (static mod)}$
 \uparrow mass per unit length

$$K.E. [AB] = \frac{13}{280} X_0^2 \omega_0^2 M_{[AB]}$$

For segment [CD]:

$$v_b(y)|_{[CD]} = X_0 \left[1 - \frac{3}{2} \left(\frac{y}{L}\right)^2 + \left(\frac{y}{L}\right)^3 \right] \omega_0$$

Thus:

$$KE_{[CD]} = \frac{X_0^2 \omega_0^2 M_{[CD]}}{2L} \int_0^L \left[1 - \frac{3}{2} \left(\frac{y}{L} \right)^2 + \left(\frac{y}{L} \right)^3 \right]^2 dy$$

↓

$$KE_{[CD]} = \frac{83}{280} X_0^2 \omega_0^2 M_{[CD]}$$

Let $M_b \triangleq$ total mass of all 8 beams. static mass of beam [CD]

Then: $M_{[AB]} = M_{[CD]} = \frac{1}{8} M_b$

Thus: $KE_b = 4 KE_{[AB]} + 4 KE_{[CD]} = \frac{6}{35} X_0^2 \omega_0^2 M_b$

and

$$KE_{max} = X_0^2 \omega_0^2 \left[\frac{1}{2} M_s + \frac{1}{8} M_t + \frac{6}{35} M_b \right]$$

$PE_{max} \rightarrow$ simply equal to the work done to achieve maximum deflection

$$PE_{max} = \frac{1}{2} k_x X_0^2$$

Thus, using Rayleigh-Ritz:

$$KE_{max} = PE_{max}$$

$$X_0^2 \omega_0^2 \left[\frac{1}{2} M_s + \frac{1}{8} M_t + \frac{6}{35} M_b \right] = \frac{1}{2} k_x X_0^2$$

$$\omega_0 = \left[\frac{k_x}{M_{eq}} \right]^{1/2} \quad k_c$$

where $M_{eq} = M_s + \frac{1}{4} M_t + \frac{12}{35} M_b$

(Resonance freq. of a folded-beam Suspended shuttle)

Pass out Midterm!

Mid-term Statistics

Top Score	96
Avg.	73
Median	78
Std. Dev	18