

Denial-of-Service (DoS)

CS 161: Computer Security

Prof. David Wagner

March 5, 2013

Attacks on Availability

- Denial-of-Service (**DoS**): *preventing legitimate users from using a computing service*
- We do though need to consider our **threat model** ...
 - What might motivate a DoS attack?

Botnets Beat Spartan Laser on *Halo 3*

By Kevin Poulsen  February 4, 2009 | 12:13 pm | Categories: [Cybarmageddon!](#)



What's the most powerful weapon you can wield when playing *Halo 3* online?

I know. You can control the entire map with a battle rifle and a couple of sticky grenades. But that teeny-bopper you just pwned has you beat with the tiny botnet he leased with his allowance money.

Krebs on Security

In-depth security news and investigation



There are dozens of underground forums where members advertise their ability to execute debilitating “distributed denial-of-service” or DDoS attacks for a price. DDoS attack services tend to charge the same prices, and the average rate for taking a Web site offline is surprisingly affordable. about \$5 to \$10 per hour; \$40 to \$50 per day; \$350-\$400 a week; and upwards of \$1,200 per month.

Of course, it pays to read the fine print before you enter into any contract. Most DDoS services charge varying rates depending on the complexity of the target’s infrastructure, and how much lead time the attack service is given to size up the mark. Still, buying in bulk always helps: One service advertised on several fraud forums offered discounts for regular and wholesale customers.



An ad for a DDoS attack service.

Extortion via DDoS on the rise

By [Denise Pappalardo](#) and [Ellen Messmer](#), Network World, 05/16/05

Criminals are increasingly targeting corporations with distributed denial-of-service attacks designed not to disrupt business networks but to extort thousands of dollars from the companies.

Ivan Maksakov, Alexander Petrov and Denis Stepanov were accused of receiving \$4 million from firms that they threatened with cyberattacks.

The trio concentrated on U.K. Internet gambling sites, according to the prosecution. One bookmaker, which refused to pay a demand for \$10,000, was attacked and brought offline--which reportedly cost it more than \$200,000 a day in lost business.

NOV 06

8

DDoS makes a phishing e-mail look real

Posted by Munir Kotadia @ 12:00

 [0 comments](#)

Just as Internet users learn that clicking on a link in an e-mail purporting to come from their bank is a bad idea, phishers seem to be developing a new tactic -- launch a DDoS attack on the Web site of the company whose customers they are targeting and then send e-mails "explaining" the outage and offering an "alternative" URL.

November 17th, 2008

Anti fraud site hit by a DDoS attack

Posted by Dancho Danchev @ 4:01 pm

Categories: [Botnets](#), [Denial of Service \(DoS\)](#), [Hackers](#), [Malware](#), [Pen testing...](#)

Tags: [Security](#), [Cybercrime](#), [DDoS](#), [Fraud](#), [Bobbear...](#)

 **9 TalkBacks**
ADD YOUR OPINION

 SHARE

 PRINT

 E-MAIL

 **+2**
WORTHWHILE? 4 VOTES



The popular British anti-fraud site **Bobbear.co.uk** is currently under a DDoS attack (distributed denial of service attack) , originally launched last Wednesday, and is

continuing to hit the site with 3/4 million hits daily from hundreds of thousands of malware infected hosts mostly based in Asia and Eastern Europe, according to the site's owner. Targeted DDoS attacks against anti-fraud and volunteer [cybercrime fighting communities](#) clearly indicate the impact these communities have on the revenue stream of scammers, and with Bobbear attracting such a high profile underground attention, the site is indeed doing a very good job.

'Operation Payback' Attacks Fell Visa.com

By ROBERT MACKEY



Operation: Payback Operation:

A message posted on Twitter by a group of Internet activists announcing the start of an attack on Visa's Web site, in retaliation for the company's actions against WikiLeaks.

Last Updated | 6:54 p.m. A group of Internet activists took credit for crashing the Visa.com Web site on Wednesday afternoon, hours after they launched [a similar attack on MasterCard](#). The cyber attacks, by activists who call themselves Anonymous, are aimed at punishing companies that have acted to stop the flow of donations to WikiLeaks in recent days.

The group explained that its [distributed denial of service attacks](#) — in which they essentially flood Web sites site with traffic to slow them down or knock them offline — were part of a broader effort called Operation Payback, which




Distributed Denial of Service Attacks Against Independent Media and Human Rights Sites

Ethan Zuckerman, Hal Roberts, Ryan McGrady, Jillian York, John Palfrey[†]

The Berkman Center for Internet & Society at Harvard University

December 2010

9. In the past year, has your site been subjected to a denial of service attack, meaning an attacker prevented or attempted to prevent access to your site altogether?

#	Answer	Bar	Response	%
1	yes		21	62%
2	no		8	24%
3	not sure		5	15%
	Total		34	

Row over Korean election DDoS attack heats up

Ruling party staffer accused of disrupting Seoul mayoral by-election

By [John Leyden](#) • [Get more from this author](#)

Posted in [Security](#), 7th December 2011 09:23 GMT

[Free whitepaper – IBM System Networking RackSwitch G8124](#)

A political scandal is brewing in Korea over alleged denial of service attacks against the National Election Commission (NEC) website.

Police have arrested the 27-year-old personal assistant of ruling Grand National Party politician Choi Gu-sik over the alleged cyber-assault, which disrupted a Seoul mayoral by-election back in October.

However, security experts said that they doubt the suspect, identified only by his surname "Gong", had the technical expertise or resources needed to pull off the sophisticated attack.

Row over Korean election DDoS attack heats up

Ruling party staffer accused of disrupting Seoul mayoral by-election

By [John Leyden](#) • [Get more from this author](#)

Posted in [Security](#), 7th December 2011 09:23 GMT

[Free whitepaper – IBM System Networking RackSwitch G8124](#)

A political scandal is brewing in Korea over alleged denial of service attacks against the National Election Commission (NEC) website.

Police have arrested the 27-year-old personal assistant of ruling Grand National Party politician Choi Gu-sik over the alleged cyber-assault, which disrupted a Seoul mayoral by-election back in October.

However, security experts said that they doubt the suspect, identified only by his surname "Gong", had the technical expertise or resources needed to pull off the sophisticated attack.

Gong continues to protest his innocence, a factor that has led opposition politicians to speculate that he is covering up for higher-ranking officials who ordered the attack.

Democratic Party politician Baek Won-woo told [The HankYoreh](#): "We need to determine quickly and precisely whether there was someone up the line who ordered the attack, and whether there was compensation." ®

Russia accused of unleashing cyberwar to disable Estonia

- Parliament, ministries, banks, media targeted
- Nato experts sent in to strengthen defences

Ian Traynor in Brussels
The Guardian, Thursday 17 May 2007
Article history



Bronze Soldier, the Soviet war memorial removed from Tallinn.
Nisametdinov/AP

A three-week wave of massive cyber-attacks on the small Baltic country of Estonia, the first known incidence of such an assault on a state, is causing alarm across the western alliance, with Nato urgently examining the offensive and its implications.

August 11th, 2008

Coordinated Russia vs Georgia cyber attack in progress

Posted by Dancho Danchev @ 4:23 pm

Categories: [Black Hat](#), [Botnets](#), [Denial of Service \(DoS\)](#), [Governments](#), [Hackers...](#)

Tags: [Security](#), [Cyber Warfare](#), [DDoS](#), [Georgia](#), [South Osetia...](#)



62 TalkBacks

ADD YOUR OPINION



SHARE



PRINT



E-MAIL



+18

WORTHWHILE?

24 VOTES

In the wake of the [Russian-Georgian conflict](#), a week worth of speculations around Russian Internet forums have finally materialized into a coordinated cyber attack against Georgia's Internet infrastructure. The attacks have already managed to compromise several government web sites, with continuing DDoS attacks against numerous other Georgian government sites, prompting the government to switch to hosting locations to the U.S, with [Georgia's Ministry of Foreign Affairs](#) undertaking a desperate step in order to disseminate real-time information by moving to a Blogger account.

Country	IPs	From	To	From	To
Florida, U.S.A.	Okay	19.4	19.9	69.5	
Washington, D.C., U.S.A.	Okay	149.5	144.6	276.4	
Baltimore, Australia	Okay	170.5	174.5	170.5	
Singapore, Singapore	Okay	200.5	214.0	200.4	
New York, U.S.A.	Packet loss (100%)				
Amsterdam, Netherlands	Packet loss (100%)				
Austin, U.S.A.	Packet loss (100%)				
London, United Kingdom	Packet loss (100%)				
Stockholm, Sweden	Packet loss (100%)				
Oslo, Norway	Packet loss (100%)				
Chicago, U.S.A.	Packet loss (100%)				
Austin, U.S.A.	Packet loss (100%)				
Amsterdam, Netherlands	Packet loss (100%)				
Frankfurt, Germany	Packet loss (100%)				
Paris, France	Packet loss (100%)				
Copenhagen, Denmark	Packet loss (100%)				
San Francisco, U.S.A.	Packet loss (100%)				
Toronto, Canada	Packet loss (100%)				
Madrid, Spain	Packet loss (100%)				
Shanghai, China	Packet loss (100%)				
Lille, France	Packet loss (100%)				
Dresden, Germany	Packet loss (100%)				
Munich, Germany	Packet loss (100%)				
Capri, Italy	Packet loss (100%)				
King Kong, China	Packet loss (100%)				
Johnsburg, South Africa	Packet loss (100%)				
Porto Alegre, Brazil	Packet loss (100%)				
Sydney, Australia	Packet loss (100%)				
Mumbai, India	Packet loss (100%)				
San Jose, U.S.A.	Packet loss (100%)				

Posted on Tuesday, August 12th, 2008 | Bookmark on [del.icio.us](#)

Georgia DDoS Attacks - A Quick Summary of Observations

by Jose Nazario

The clashes between Russia and Georgia over the region of South Ossetia have been shadowed by [attacks on the Internet](#). As we noted in July, the [Georgia presidential website](#) fell victim to [attack](#) during a [war of words](#). A number of DDoS attacks have

Raw statistics of the attack traffic paint a pretty intense picture. We can discern that the attacks would cause injury to almost any common website.

Average peak bits per second per attack	211.66 Mbps
Largest attack, peak bits per second	814.33 Mbps
Average attack duration	2 hours 15 minutes
Longest attack duration	6 hour

ATLAS Peak Monitored Attack Sizes Month-By-Month (January 2009-Present)

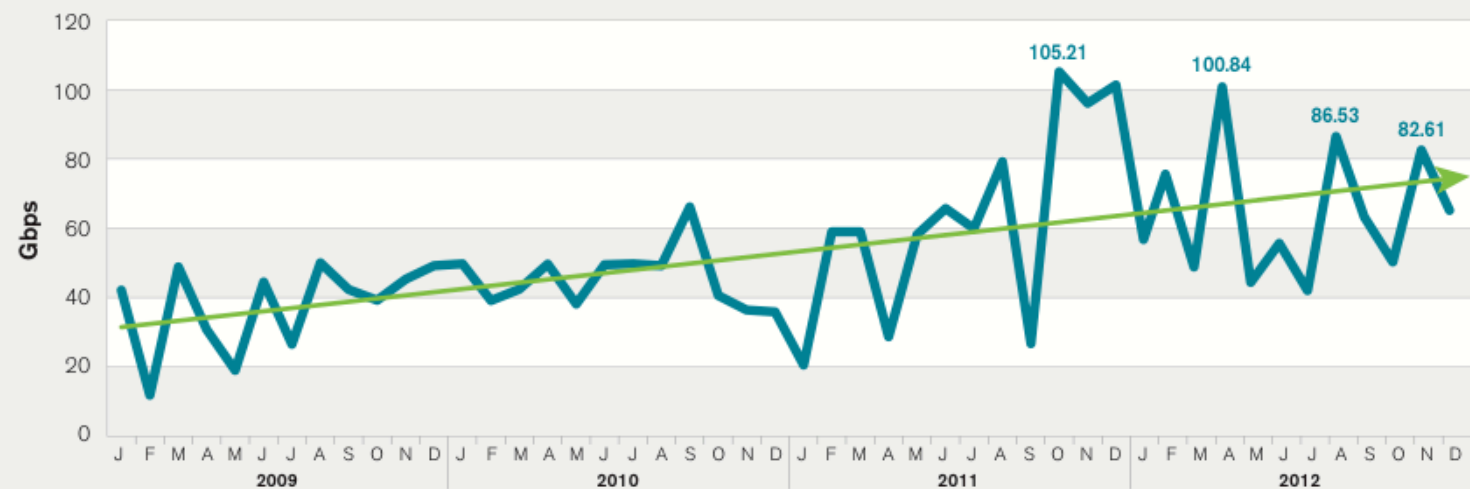


Figure 17 Source: Arbor Networks, Inc.

ATLAS Average Monitored Attack Sizes Month-By-Month (January 2009-Present)

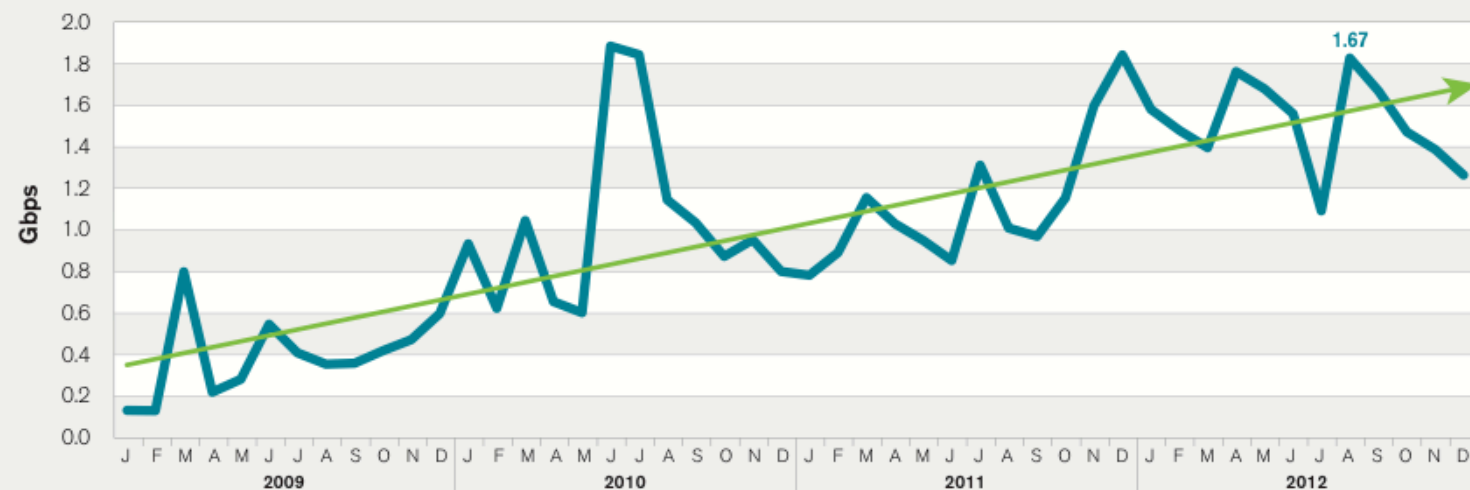


Figure 18 Source: Arbor Networks, Inc.

Most Significant Operational Threats

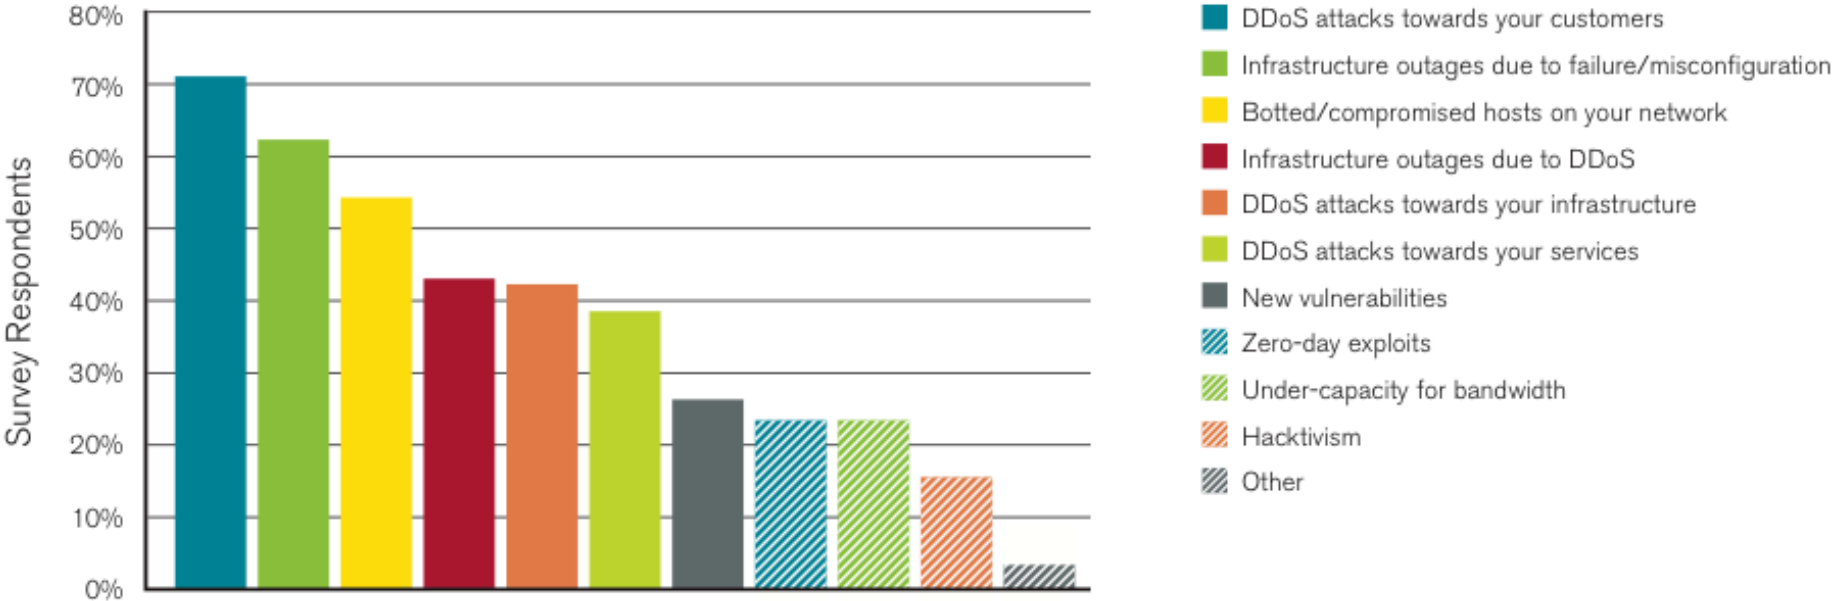


Figure 6 Source: Arbor Networks, Inc.

Motivations for DoS

- Showing off / entertainment / ego
- Competitive advantage
 - Maybe commercial, maybe just to win
- Vendetta / denial-of-money
- Extortion
- Political statements
- Impair defenses
- Espionage
- Warfare

Attacks on Availability

- Deny service via a **program flaw** (“*NULL”)
 - E.g., supply an input that crashes a server
 - E.g., fool a system into shutting down
- Deny service via **resource exhaustion** (“while(1);”)
 - E.g., consume CPU, memory, disk, network
- Network-level DoS vs application-level DoS

DoS & Operating Systems

- How could you DoS a multi-user Unix system on which you have a login?

DoS & Operating Systems

- How could you DoS a multi-user Unix system on which you have a login?
 - `char buf[1024];`
`int f = open("/tmp/junk");`
`while (1) write(f, buf, sizeof(buf));`
 - Gobble up all the disk space!
 - `while (1) fork();`
 - Create a zillion processes!
 - Create zillions of files, keep opening, reading, writing, deleting
 - **Thrash** the disk
 - ... doubtless many more
- Defenses?

DoS & Operating Systems

- How could you DoS a multi-user Unix system on which you have a login?
 - `char buf[1024];`
`int f = open("/tmp/junk");`
`while (1) write(f, buf, sizeof(buf));`
 - Gobble up all the disk space!
 - `while (1) fork();`
 - Create a zillion processes!
 - Create zillions of files, keep opening, reading, writing, deleting
 - **Thrash** the disk
 - ... doubtless many more
- Defenses?
 - **Isolate** users / impose **quotas**

Network-level DoS

- Can exhaust network resources by
 - Flooding with lots of packets (brute-force)
 - DDoS: flood with packets from many sources
 - Amplification: Abuse patsies who will amplify your traffic for you

DoS & Networks

- How could you DoS a target's Internet access?
 - Send a **zillion** packets at them
 - Internet lacks isolation between traffic of different users!
- What resources does attacker need to pull this off?
 - At least as much sending capacity (“bandwidth”) as the **bottleneck link** of the target's Internet connection
 - Attacker sends **maximum-sized packets**
 - **Or:** overwhelm the rate at which the **bottleneck router** can process packets
 - Attacker sends **minimum-sized packets!**
 - (in order to maximize the packet arrival rate)

Defending Against Network DoS

- Suppose an attacker has access to a beefy system with high-speed Internet access (a “**big pipe**”).
- They pump out packets towards the target at a very high rate.
- What might the target do to defend against the onslaught?
 - Install a network **filter** to discard any packets that arrive with attacker’s IP address as their source
 - E.g., `drop * 66.31.1.37:* -> *:*`
 - Or it can leverage **any other pattern** in the flooding traffic that’s not in benign traffic
 - Attacker’s IP address = means of **identifying** misbehaving user

Filtering Sounds Pretty Easy ...

- ... but DoS filters can be easily evaded:
 - Make traffic appear as though it's from **many hosts**
 - **Spoof** the source address so it can't be used to filter
 - Just pick a random 32-bit number of each packet sent
 - How does a defender filter this?
 - **They don't!**
 - Best they can hope for is that operators around the world implement **anti-spoofing mechanisms** (today about 75% do)
 - Use **many** hosts to send traffic rather than just one
 - Distributed Denial-of-Service = **DDoS** (“dee-doss”)
 - Requires defender to install complex filters
 - How many hosts is “enough” for the attacker?
 - Today they are very cheap to acquire ... :-)

It's Not A “Level Playing Field”

- When defending resources from exhaustion, need to beware of **asymmetries**, where attackers can consume victim resources with little comparable effort
 - Makes DoS easier to launch
 - Defense costs much more than attack
- Particularly dangerous form of asymmetry: **amplification**
 - Attacker leverages system's own structure to pump up the load they induce on a resource

Amplification: Network DoS

- One technique for magnifying flood traffic: leverage Internet's *broadcast functionality*

Amplification: Network DoS

- One technique for magnifying flood traffic: leverage Internet's *broadcast functionality*
- How does an attacker exploit this?
 - Send traffic to the broadcast address and **spoof** it *as though the DoS victim sent it*
 - All of the replies then **go to the victim** rather than the attacker's machine
 - Each attacker pkt yields **dozens** of flooding pkts
- Note, this particular threat has been **fixed**
 - By *changing the Internet standard* to state routers shouldn't forward pkts addressed to broadcast addrs
 - Thus, attacker's spoofs won't make it to target subnet

smurf
attack

Amplification

- Example of amplification: DNS lookups
 - *Reply is generally much bigger than request*
 - Since it includes a copy of the reply, plus answers etc.
 - ⇒ Attacker spoofs DNS request to a patsy DNS server, **seemingly from the target**
 - Small attacker packet yields **large** flooding packet
 - Doesn't increase # of packets, but **total volume**
- Note #1: these examples involve **blind spoofing**
 - So for network-layer flooding, generally only works for UDP-based protocols (can't establish TCP conn.)
- Note #2: victim doesn't see spoofed source addresses
 - Addresses are those of actual intermediary systems

Transport-Level Denial-of-Service

- Recall TCP's 3-way connection establishment handshake
 - Goal: agree on initial sequence numbers

Client (initiator)

Server

SYN, SeqNum = x

SYN + ACK, SeqNum = y , Ack = $x + 1$


ACK, Ack = $y + 1$

Server creates **state** associated with connection here (buffers, timers, counters)

Attacker doesn't even need to send this ack

Transport-Level Denial-of-Service

- Recall TCP's 3-way connection establishment handshake
 - Goal: agree on initial sequence numbers
- So a **single** SYN from an attacker suffices to force the server to *spend some memory*

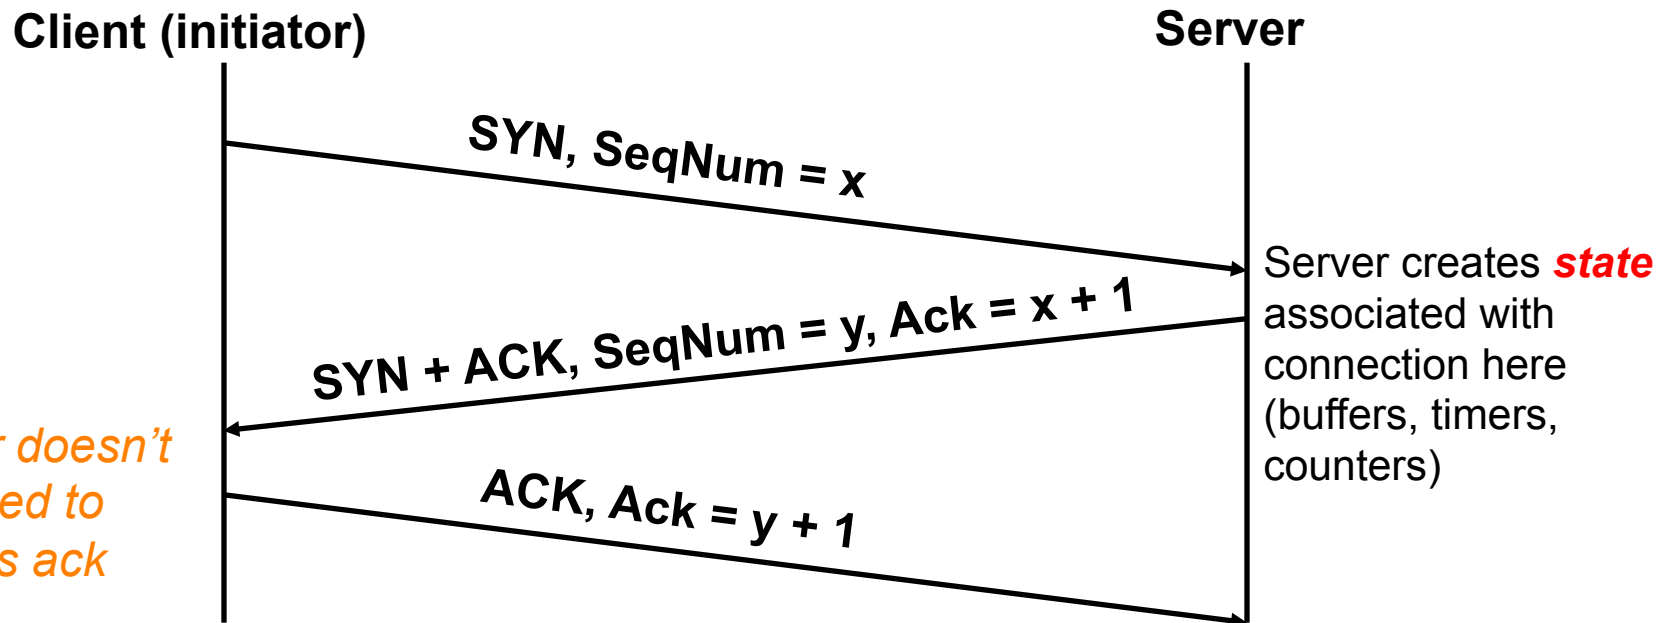

TCP *SYN Flooding*

- Attacker targets *memory* rather than network capacity
- Every (unique) SYN that the attacker sends burdens the target
- What should target do when it has no more memory for a new connection?
- No good answer!
 - *Refuse* new connection?
 - Legit new users can't access service
 - *Evict* old connections to make room?
 - Legit old users get kicked off

TCP SYN Flooding Defenses


- How can the target defend itself?
- Approach #1: make sure they have **tons of memory!**
 - How much is enough?
 - Depends on resources attacker can bring to bear (**threat model**), which might be hard to know

TCP SYN Flooding Defenses

- Approach #2: **identify** bad actors & refuse their connections
 - **Hard** because only way to identify them is based on IP address
 - We can't for example require them to send a password because doing so requires we have an established connection!
 - For a public Internet service, who knows which addresses customers might come from?
 - Plus: attacker can **spoof** addresses since they don't need to complete TCP 3-way handshake
- Approach #3: don't keep state! (“**SYN cookies**”; *only works for spoofed SYN flooding*)

SYN Flooding Defense: *Idealized*

- Server: when SYN arrives, rather than keeping state locally, *send it to the client* ...
- Client needs to *return the state* in order to establish connection

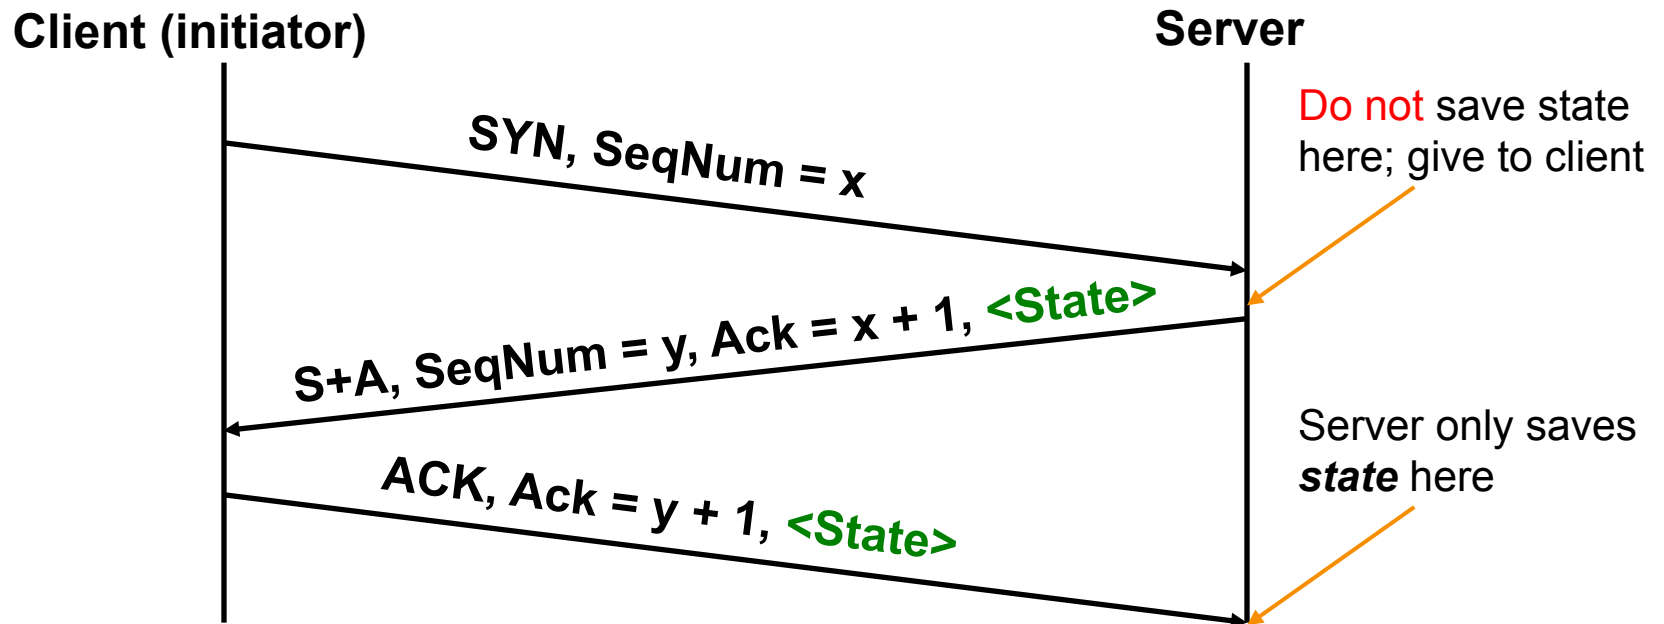

SYN Flooding Defense: *Idealized*

- Server: when SYN arrives, rather than keeping state locally. *send it to the client ...*

- Client establ

Client (

Problem: the world isn't so ideal!

TCP doesn't include an easy way to add a new **<State>** field like this.


Is there any way to get the same functionality without having to change TCP clients?

It save state
give to client



Practical Defense: *SYN Cookies*

- Server: when SYN arrives, **encode** connection state entirely within SYN-ACK's sequence # y
 - y = **encoding** of necessary state, using server **secret**
- When ACK of SYN-ACK arrives, server only creates state **if** value of y from it agrees w/ **secret**

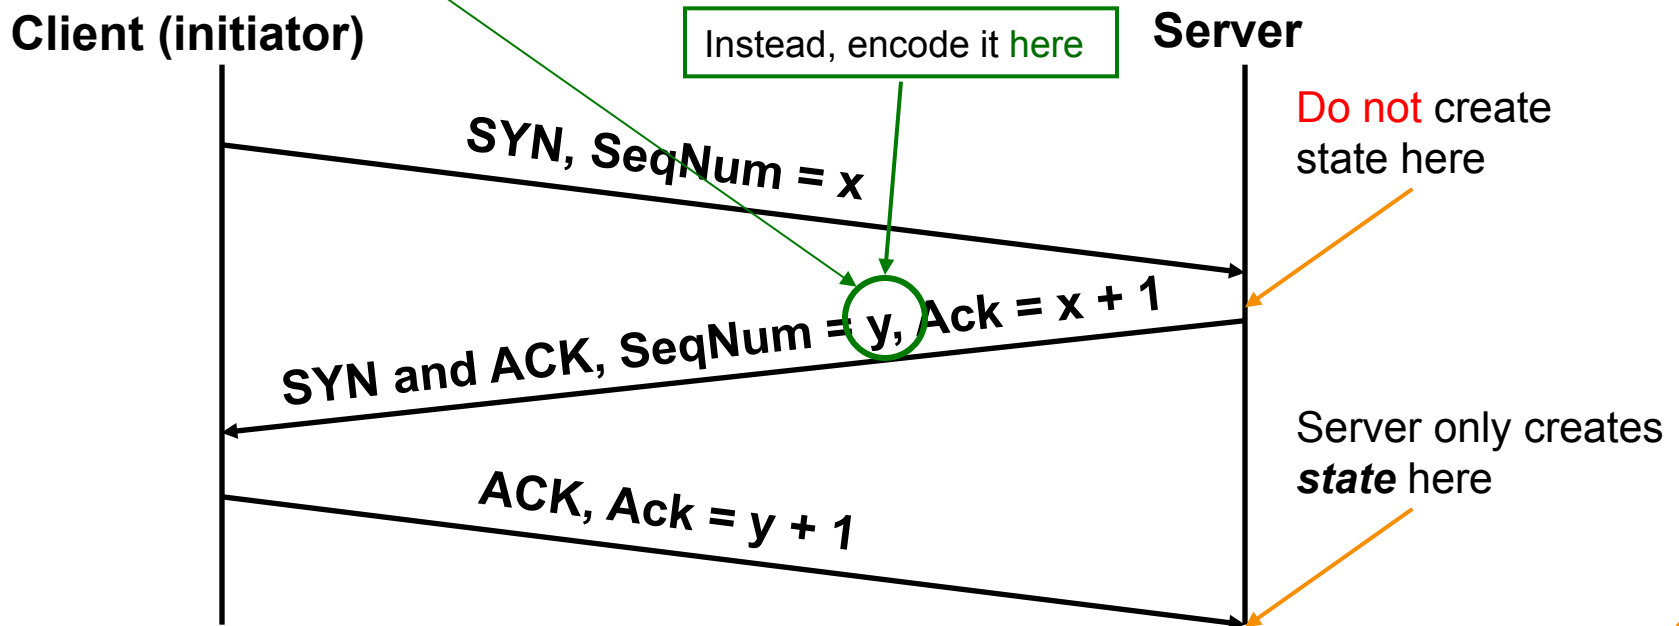

SYN Cookies: Discussion

- Illustrates general strategy: rather than *holding* state, *encode* it so that it is returned when needed
- For SYN cookies, attacker must complete 3-way handshake in order to burden server
 - *Can't use spoofed source addresses*
- Note #1: strategy requires that you have enough bits to encode all the state
 - (This is just barely the case for SYN cookies)
- Note #2: if it's *expensive* to generate *or check* the cookie, then it's not a win

Application-Layer DoS

- Rather than exhausting network or memory resources, attacker can overwhelm a service's processing capacity
- There are **many** ways to do so, often at little expense to attacker compared to target (*asymmetry*)



reddit

hot

new

browse

stats

↑↓ This link runs a slooow SQL query on the RIAA's server. Don't click it; that would be wrong. (tinyurl.com)

814 points posted 8 days ago by keyboard_user 211 comments

The link sends a request to the web server that requires heavy processing by its “backend database”.

Algorithmic complexity attacks

- Attacker can try to trigger worst-case complexity of algorithms / data structures
- Example: You have a hash table.
Expected time: $O(1)$. Worst-case: $O(n)$.
- Attacker picks inputs that cause hash collisions.
Time per lookup: $O(n)$.
Total time to do n operations: $O(n^2)$.
- Solution? Use algorithms with good worst-case running time.
 - E.g., universal hash function guarantees that $\Pr[h_k(x)=h_k(y)] = 1/2^b$, so hash collisions will be rare.

Application-Layer DoS

- Rather than exhausting network or memory resources, attacker can overwhelm a service's processing capacity
- There are many ways to do so, often at little expense to attacker compared to target (asymmetry)
- Defenses against such attacks?
- Approach #1: Only let **legit** users issue expensive requests
 - Relies on being able to **identify/authenticate** them
 - Note: that *this itself might be expensive!*
- Approach #2: Force legit users to “burn” cash
- Approach #3: massive over-provisioning (\$\$\$)

DoS Defense in General Terms

- Defending against **program flaws** requires:
 - Careful design and coding/testing/review
 - Consideration of behavior of defense mechanisms
 - E.g. buffer overflow detector that when triggered halts execution to prevent code injection ⇒ **denial-of-service**
- Defending resources from **exhaustion** can be **really** hard. Requires:
 - *Isolation and scheduling mechanisms*
 - Keep adversary's consumption from affecting others
 - *Reliable identification* of different users