

CS 61C: Great Ideas in Computer Architecture (Machine Structures)

Lecture 39: GP-GPU Programming

Lecturer:
Alan Christopher

Overview

- GP-GPU: What and why
- OpenCL, CUDA, and programming CPUs
- GPU Performance demo

A Quick Review: Classes of Parallelism

- ILP:
 - Run multiple instructions from one stream in parallel (e.g. pipelining)
- TLP:
 - Run multiple instruction streams simultaneously (e.g. openMP)
- DLP:
 - Run the same operation on multiple data at the same time (e.g. SSE intrinsics)

GPUs are here

GPUs

- Hardware specialized for graphics calculations
- Graphics calculations are extremely data parallel
 - e.g. double the brightness of every pixel in an image
- Programmers found that that could rephrase some of their problems as graphics manipulations and run them on the GPU
 - Incredibly burdensome for the programmer to use
 - More usable these days - openCL, CUDA

CPU vs. GPU

- | | |
|---------------------------------|-----------------------------------|
| • Latency optimized | • Throughput optimized |
| • A couple threads of execution | • Many, many threads of execution |
| • Each thread executes quickly | • Each thread executes slowly |
| • Serial code | • Parallel code |
| • Lots of caching | • Lots of memory bandwidth |

OpenCL and CUDA

- Extensions to C which allow for relatively easy GPU programming
- CUDA is NVIDIA proprietary
 - NVIDIA cards only
- OpenCL is opensource
 - Can be used with NVIDIA or ATI cards
- Similar tools, but different jargon

Kernels

- Kernels define the computation for one array index
- The GPU runs the kernel on each index of a specified range
- Similar functionality to map, but you get to know the array index and the array value.
- Call the work at a given index a *work-item*, a *cuda thread*, or a *μthread*.
- The entire range is called an *index-space* or *grid*.

5/01/13

Spring 2013 -- Lecture #39

7

OpenCL vadd

```

/* C version. */
void vadd(float *dst, float *a, float *b, unsigned n) {
    for(int i = 0; i < n; i++)
        dst[i] = a[i] + b[i]
}

/* openCL Kernel. */
__kernel void vadd(__global float *dst, __global float *a,
                  __global float *b, unsigned n) {
    unsigned tid = get_global_id(0);
    if (tid < n)
        dst[tid] = a[tid] + b[tid];
}
    
```

5/01/13


Spring 2013 -- Lecture #39

8

Programmer's View of Execution

Create enough work groups to cover input vector

(openCL calls this ensemble of work groups an index space, can be 3-dimensional in openCL, 2 dimensional in CUDA)

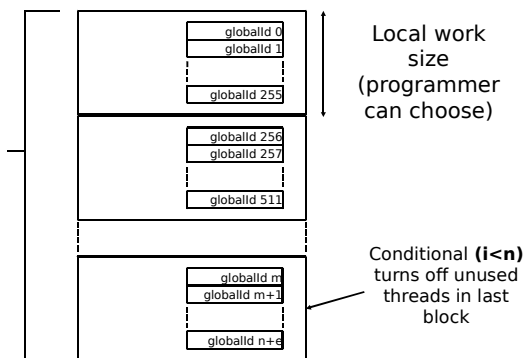


5/01/13

Spring 2013 -- Lecture #39

9

Hardware Execution Model

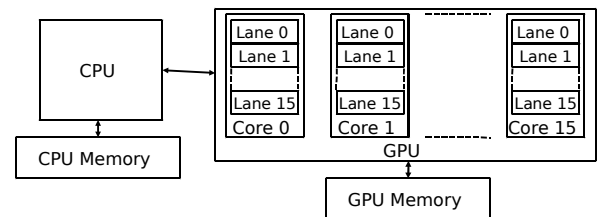

- GPU is built from multiple parallel cores, each core contains a multithreaded SIMD processor.
- CPU sends whole index-space over to GPU, which distributes work-groups among cores (each work-group executes on one core)
 - Programmer unaware of number of cores


5/01/13

Spring 2013 -- Lecture #39

10

"Single Instruction, Multiple Thread"

- GPUs use a SIMT model, where individual scalar instruction streams for each work item are grouped together for SIMD execution on hardware (Nvidia groups 32 CUDA threads into a *warp*. OpenCL refers to them as *wavefronts*.)

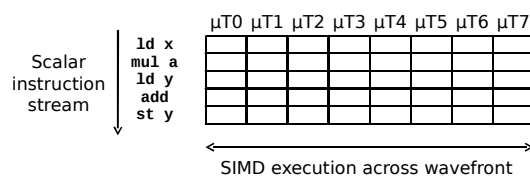

5/01/13

Spring 2013 -- Lecture #39

11

Terminology Summary

- Kernel: The function that is mapped across the input.
- Work-item: The basic unit of execution. Takes care of one index. Also called a microthread or cuda thread.
- Work-group: A group of work-items. Each work-group is sent to one core in the GPU.
- Index-space: The range of indices over which the kernel is applied.
- Wavefront: A group of microthreads (work-items) scheduled to be SIMD executed with each other.

5/01/13

Spring 2013 -- Lecture #39

12

Administrivia

- Project 4 is due May 5th.
- Lab this week is free time to work on the project.


4/29/13

Fall 2011 -- Lecture #37

13

Conditionals in the SIMT Model

- Simple if-then-else are compiled into predicated execution, equivalent to vector masking
- More complex control flow compiled into branches
- How to execute a vector of branches?

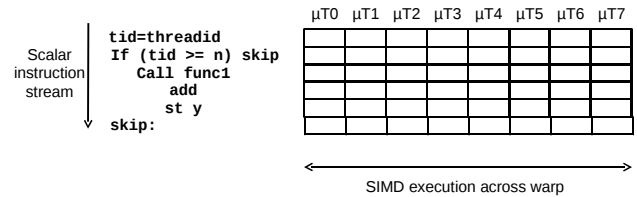

5/01/13

Spring 2013 -- Lecture #39

14

Branch Divergence


- Hardware tracks which μ threads take or don't take branch
- If all go the same way, then keep going in SIMD fashion
- If not, create mask vector indicating taken/not-taken
- Keep executing not-taken path under mask, push taken branch PC+mask onto a hardware stack and execute later
- When can execution of μ threads in warp reconverge?

5/01/13

Spring 2013 -- Lecture #39

15

Warps (wavefronts) are multithreaded on a single core

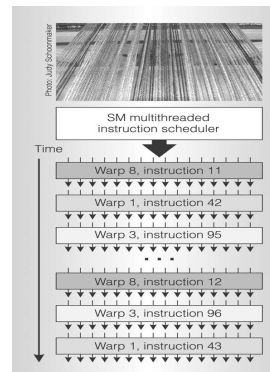

- One warp of 32 μ threads is a single thread in the hardware
- Multiple warp threads are interleaved in execution on a single core to hide latencies (memory and functional unit)
- A single thread block can contain multiple warps (up to 512 μ T max in CUDA), all mapped to single core
- Can have multiple blocks executing on one core

5/01/13


[Nvidia, 2010]

Spring 2013 -- Lecture #39

16

OpenCL Memory Model

- Global - read and write by all work-items and work-groups
- Constant - read-only by work-items; read and write by host
- Local - used for data sharing; read/write by work-items in the same work group
- Private - only accessible to one work-item

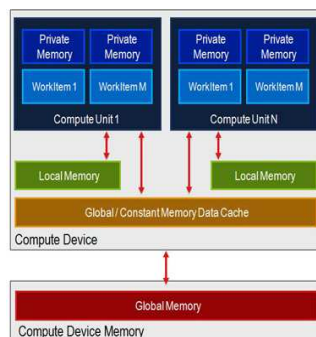

5/01/13

Spring 2013 -- Lecture #39

17

SIMT

- Illusion of many independent threads
- But for efficiency, programmer must try and keep μ threads aligned in a SIMD fashion
- Try to do unit-stride loads and store so memory coalescing kicks in
- Avoid branch divergence so most instruction slots execute useful work and are not masked off

5/01/13

Spring 2013 -- Lecture #39

18

VVADD

```
/* C version. */
void vvadd(float *dst, float *a, float *b, unsigned n) {
    #pragma omp parallel for
    for(int i = 0; i < n; i++)
        dst[i] = a[i] + b[i]
}

/* openCL Kernel. */
__kernel void vvadd(__global float *dst, __global float *a,
    __global float *b, unsigned n) {
    unsigned tid = get_global_id(0);
    if (tid < n)
        dst[tid] = a[tid] + b[tid];
}
```

A: CPU faster
B: GPU faster

VVADD

```
/* C version. */
void vvadd(float *dst, float *a, float *b, unsigned n) {
    #pragma omp parallel for
    for(int i = 0; i < n; i++)
        dst[i] = a[i] + b[i]
}
```

- Only 1 flop per three memory accesses => memory bound calculation.

• “A many core processor \equiv A device for turning a compute bound problem into a memory bound problem” – Kathy Yelick

VECTOR_COP

```
/* C version. */
void vector_cop(float *dst, float *a, float *b, unsigned n) {
    #pragma omp parallel for
    for(int i = 0; i < n; i++) {
        dst[i] = 0;
        for (int j = 0; j < A_LARGE_NUMBER; j++)
            dst[i] += a[i]*2*b[j] - a[j]*a[i] - b[j]*b[i];
    }
}

/* OpenCL kernel. */
__kernel void vector_cop(__global float *dst, __global float *a,
    __global float *b, unsigned n) {
    unsigned i = get_global_id(0);
    if (tid < n) {
        dst[i] = 0;
        for (int j = 0; j < A_LARGE_NUMBER; j++)
            dst[i] += a[i]*2*b[j] - a[j]*a[i] - b[j]*b[i];
    }
}
```

A: CPU faster
B: GPU faster

GP-GPU in the future

- High-end desktops have separate GPU chip, but trend towards integrating GPU on same die as CPU (already in laptops, tablets and smartphones)
 - Advantage is shared memory with CPU, no need to transfer data
 - Disadvantage is reduced memory bandwidth compared to dedicated smaller-capacity specialized memory system
 - Graphics DRAM (GDDR) versus regular DRAM (DDR3)
- Will GP-GPU survive? Or will improvements in CPU DLP make GP-GPU redundant?
 - On same die, CPU and GPU should have same memory bandwidth
 - GPU might have more FLOPS as needed for graphics anyway

Acknowledgements

- These slides contain materials developed and copyright by
 - Krste Asanovic (UCB)
 - AMD
 - codeproject.com

And in conclusion...

- GPUs thrive when
 - The calculation is data parallel
 - The calculation is CPU-bound
 - The calculation is large
- CPUs thrive when
 - The calculation is largely serial
 - The calculation is small
 - The programmer is lazy

Bonus

- OpenCL source code for `vvadd` and `vector_cop` demos available at

<http://www-inst.eecs.berkeley.edu/~cs61c/sp13/lec/39/demo.tar.gz>