

## CS 188: Artificial Intelligence

### Constraint Satisfaction Problems




Dan Klein, Pieter Abbeel  
University of California, Berkeley

## What is Search For?

- Assumptions about the world: a single agent, deterministic actions, fully observed state, discrete state space
- Planning: sequences of actions
  - The path to the goal is the important thing
  - Paths have various costs, depths
  - Heuristics give problem-specific guidance
- Identification: assignments to variables
  - The goal itself is important, not the path
  - All paths at the same depth (for some formulations)
  - CSPs are a specialized class of identification problems




## Constraint Satisfaction Problems

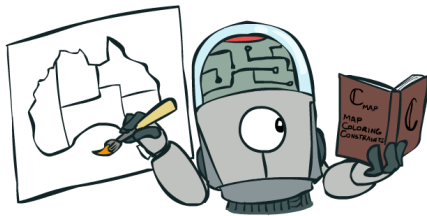


## Constraint Satisfaction Problems

- Standard search problems:
  - State is a "black box": arbitrary data structure
  - Goal test can be any function over states
  - Successor function can also be anything
- Constraint satisfaction problems (CSPs):
  - A special subset of search problems
  - State is defined by **variables**  $X_i$  with values from a **domain**  $D$  (sometimes  $D$  depends on  $i$ )
  - Goal test is a **set of constraints** specifying allowable combinations of values for subsets of variables
- Simple example of a *formal representation language*
- Allows useful general-purpose algorithms with more power than standard search algorithms




## CSP Examples

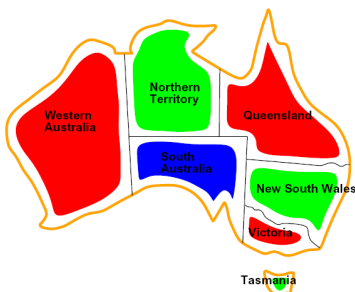

## Example: Map Coloring



- Variables:** WA, NT, Q, NSW, V, SA, T
- Domains:**  $D = \{\text{red, green, blue}\}$
- Constraints:** adjacent regions must have different colors
  - Implicit:**  $WA \neq NT$
  - Explicit:**  $(WA, NT) \in \{(\text{red, green}), (\text{red, blue}), \dots\}$
- Solutions are assignments satisfying all constraints, e.g.:**
  - $\{WA=\text{red}, NT=\text{green}, Q=\text{red}, NSW=\text{green}, V=\text{red}, SA=\text{blue}, T=\text{green}\}$



## Example: N-Queens

### Formulation 1:

- Variables:  $X_{ij}$
- Domains:  $\{0, 1\}$
- Constraints




$$\begin{aligned} \forall i, j, k \quad (X_{ij}, X_{ik}) &\in \{(0, 0), (0, 1), (1, 0)\} \\ \forall i, j, k \quad (X_{ij}, X_{kj}) &\in \{(0, 0), (0, 1), (1, 0)\} \\ \forall i, j, k \quad (X_{ij}, X_{i+k, j+k}) &\in \{(0, 0), (0, 1), (1, 0)\} \\ \forall i, j, k \quad (X_{ij}, X_{i+k, j-k}) &\in \{(0, 0), (0, 1), (1, 0)\} \end{aligned}$$

$$\sum_{i,j} X_{ij} = N$$

## Example: N-Queens

### Formulation 2:

- Variables:  $Q_k$
- Domains:  $\{1, 2, 3, \dots, N\}$
- Constraints:




Implicit:  $\forall i, j \text{ non-threatening}(Q_i, Q_j)$

Explicit:  $(Q_1, Q_2) \in \{(1, 3), (1, 4), \dots\}$


...

## Constraint Graphs



## Constraint Graphs


- Binary CSP: each constraint relates (at most) two variables
- Binary constraint graph: nodes are variables, arcs show constraints
- General-purpose CSP algorithms use the graph structure to speed up search. E.g., Tasmania is an independent subproblem!




[Demo: CSP applet (made available by [aispace.org](http://aispace.org)) -- n-queens]

## Example: Cryptarithmic

- Variables:  $F, T, U, W, R, O, X_1, X_2, X_3$
- Domains:  $\{0, 1, 2, 3, 4, 5, 6, 7, 8, 9\}$
- Constraints:
  - $\text{alldiff}(F, T, U, W, R, O)$
  - $O + O = R + 10 \cdot X_1$
  - ...




## Example: Sudoku



- Variables:
  - Each (open) square
- Domains:
  - $\{1, 2, \dots, 9\}$
- Constraints:
  - 9-way alldiff for each column
  - 9-way alldiff for each row
  - 9-way alldiff for each region
  - (or can have a bunch of pairwise inequality constraints)

## Example: The Waltz Algorithm

- The Waltz algorithm is for interpreting line drawings of solid polyhedra as 3D objects
- An early example of an AI computation posed as a CSP




- Approach:
  - Each intersection is a variable
  - Adjacent intersections impose constraints on each other
  - Solutions are physically realizable 3D interpretations

## Varieties of CSPs and Constraints



## Varieties of CSPs

- Discrete Variables
  - Finite domains
    - Size  $d$  means  $O(d^n)$  complete assignments
    - E.g., Boolean CSPs, including Boolean satisfiability (NP-complete)
  - Infinite domains (integers, strings, etc.)
    - E.g., job scheduling, variables are start/end times for each job
    - Linear constraints solvable, nonlinear undecidable
- Continuous variables
  - E.g., start/end times for Hubble Telescope observations
  - Linear constraints solvable in polynomial time by LP methods (see cs170 for a bit of this theory)




## Varieties of Constraints

- Varieties of Constraints
  - Unary constraints involve a single variable (equivalent to reducing domains), e.g.:
 
$$SA \neq \text{green}$$
  - Binary constraints involve pairs of variables, e.g.:
 
$$SA \neq VA$$
  - Higher-order constraints involve 3 or more variables: e.g., cryptarithmic column constraints
  - Preferences (soft constraints):
    - E.g., red is better than green
    - Often representable by a cost for each variable assignment
    - Gives constrained optimization problems
    - (We'll ignore these until we get to Bayes' nets)



## Real-World CSPs

- Scheduling problems: e.g., when can we all meet?
- Timetabling problems: e.g., which class is offered when and where?
- Assignment problems: e.g., who teaches what class
- Hardware configuration
- Transportation scheduling
- Factory scheduling
- Circuit layout
- Fault diagnosis
- ... lots more!

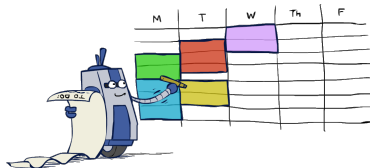


- Many real-world problems involve real-valued variables...

## Solving CSPs




## Standard Search Formulation

- Standard search formulation of CSPs
- States defined by the values assigned so far (partial assignments)
  - Initial state: the empty assignment, {}
  - Successor function: assign a value to an unassigned variable
  - Goal test: the current assignment is complete and satisfies all constraints
- We'll start with the straightforward, naïve approach, then improve it




## Search Methods

- What would BFS do?
- What would DFS do?
- What problems does naïve search have?




[Demo: coloring -- dfs]

## Backtracking Search

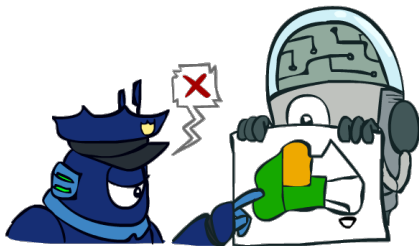


## Backtracking Search

- Backtracking search is the basic uninformed algorithm for solving CSPs
- Idea 1: One variable at a time
  - Variable assignments are commutative, so fix ordering
  - I.e., [WA = red then NT = green] same as [NT = green then WA = red]
  - Only need to consider assignments to a single variable at each step
- Idea 2: Check constraints as you go
  - I.e. consider only values which do not conflict with previous assignments
  - Might have to do some computation to check the constraints
  - "Incremental goal test"
- Depth-first search with these two improvements is called *backtracking search* (not the best name)
- Can solve n-queens for  $n \approx 25$



## Backtracking Example

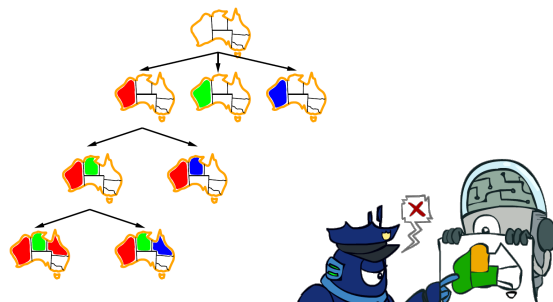

## Backtracking Search

```
function BACKTRACKING-SEARCH(csp) returns solution/failure
    return RECURSIVE-BACKTRACKING({}, csp)


function RECURSIVE-BACKTRACKING(assignment, csp) returns soln/failure
    if assignment is complete then return assignment
    var ← SELECT-UNASSIGNED-VARIABLE(VARIABLES[csp], assignment, csp)
    for each value in ORDER-DOMAIN-VALUES(var, assignment, csp) do
        if value is consistent with assignment given CONSTRAINTS[csp] then
            add {var = value} to assignment
            result ← RECURSIVE-BACKTRACKING(assignment, csp)
            if result ≠ failure then return result
            remove {var = value} from assignment
    return failure
```

- Backtracking = DFS + variable-ordering + fail-on-violation
- What are the choice points?

[Demo: coloring -- backtracking]

## Improving Backtracking

- General-purpose ideas give huge gains in speed
- Ordering:
  - Which variable should be assigned next?
  - In what order should its values be tried?
- Filtering: Can we detect inevitable failure early?
- Structure: Can we exploit the problem structure?




## Filtering



## Filtering: Forward Checking


- Filtering: Keep track of domains for unassigned variables and cross off bad options
- Forward checking: Cross off values that violate a constraint when added to the existing assignment



[Demo: coloring -- forward checking]

## Filtering: Constraint Propagation


- Forward checking propagates information from assigned to unassigned variables, but doesn't provide early detection for all failures:



- NT and SA cannot both be blue!
- Why didn't we detect this yet?
- Constraint propagation*: reason from constraint to constraint

## Consistency of A Single Arc


- An arc  $X \rightarrow Y$  is **consistent** iff for every  $x$  in the tail there is some  $y$  in the head which could be assigned without violating a constraint

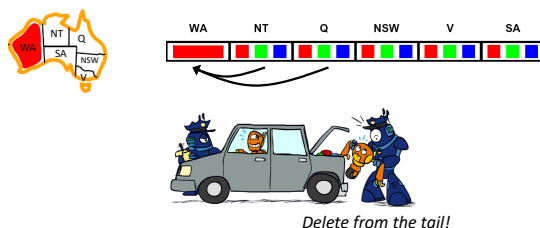

- Forward checking: Enforcing consistency of arcs pointing to each new assignment

## Arc Consistency of an Entire CSP

- A simple form of propagation makes sure **all** arcs are consistent:



- Important: If  $X$  loses a value, neighbors of  $X$  need to be rechecked!
- Arc consistency detects failure earlier than forward checking
- Can be run as a preprocessor or after each assignment
- What's the downside of enforcing arc consistency?

Remember:  
Delete from  
the tail!

## Enforcing Arc Consistency in a CSP

```

function AC-3(csp) returns the CSP, possibly with reduced domains
inputs: csp, a binary CSP with variables  $\{X_1, X_2, \dots, X_n\}$ 
local variables: queue, a queue of arcs, initially all the arcs in csp
while queue is not empty do
   $(X_i, X_j) \leftarrow \text{REMOVE-FIRST}(\text{queue})$ 
  if REMOVE-INCONSISTENT-VALUES( $X_i, X_j$ ) then
    for each  $X_k$  in NEIGHBORS( $X_i$ ) do
      add  $(X_k, X_i)$  to queue


function REMOVE-INCONSISTENT-VALUES( $X_i, X_j$ ) returns true iff succeeds
removed  $\leftarrow$  false
for each  $x$  in DOMAIN( $X_i$ ) do
  if no value  $y$  in DOMAIN( $X_j$ ) allows  $(x, y)$  to satisfy the constraint  $X_i \leftrightarrow X_j$ 
  then delete  $x$  from DOMAIN( $X_i$ ); removed  $\leftarrow$  true
return removed
    
```

- Runtime:  $O(n^2d^3)$ , can be reduced to  $O(n^2d^2)$
- ... but detecting all possible future problems is NP-hard – why?

[Demo: CSP applet (made available by aispac.org) – n-queens]

## Limitations of Arc Consistency

- After enforcing arc consistency:
  - Can have one solution left
  - Can have multiple solutions left
  - Can have no solutions left (and not know it)
- Arc consistency still runs inside a backtracking search!



What went wrong here?

[Demo: coloring -- forward checking]  
[Demo: coloring -- arc consistency]

## Ordering



## Ordering: Minimum Remaining Values

- Variable Ordering: Minimum remaining values (MRV):
  - Choose the variable with the fewest legal left values in its domain




- Why min rather than max?
- Also called “most constrained variable”
- “Fail-fast” ordering



## Ordering: Least Constraining Value

- Value Ordering: Least Constraining Value
  - Given a choice of variable, choose the *least constraining value*
  - I.e., the one that rules out the fewest values in the remaining variables
  - Note that it may take some computation to determine this! (E.g., rerunning filtering)



- Why least rather than most?
- Combining these ordering ideas makes 1000 queens feasible



[Demo: coloring – backtracking + AC + ordering]