


Announcements

- **Homework 1: Search**
 - Has been released! Due **Tuesday, Sep 10, at 11:59pm.**
 - Electronic component: on Gradescope, instant grading, submit as often as you like.
 - Written component: exam-style template to be completed (we recommend on paper) and to be submitted into Gradescope (graded on effort/completion)
- **Project 1: Search**
 - Has been released! Due **Friday, Sep 13, at 5pm.**
 - Start early and ask questions. It's longer than most!
- **Sections**
 - Starting next week / Monday
 - You can go to any

CS 188: Artificial Intelligence

Informed Search

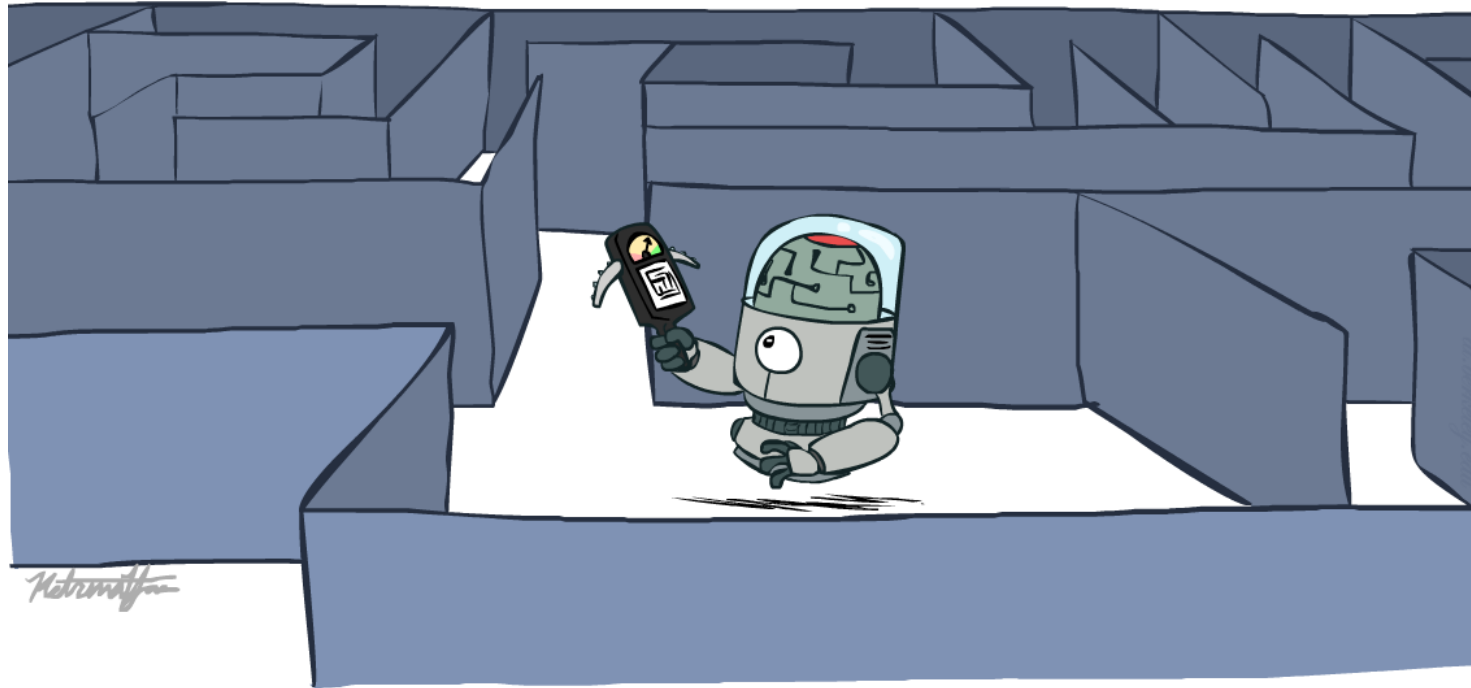

Instructors: Pieter Abbeel & Igor Mordatch


University of California, Berkeley

Today

- Informed Search
 - Heuristics
 - Greedy Search
 - A* Search
- Graph Search



Recap: Search

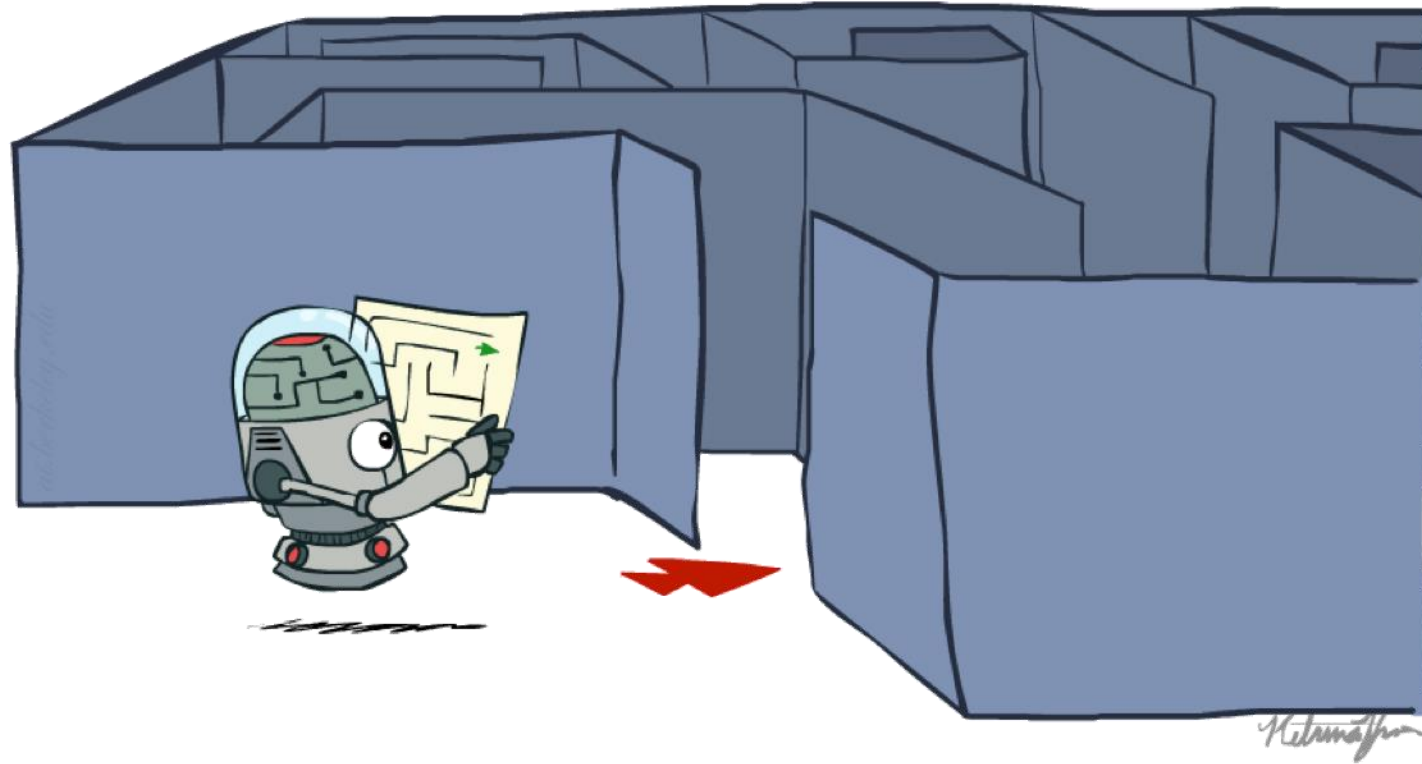

Recap: Search

- Search problem:


- States (configurations of the world)
- Actions and costs
- Successor function (world dynamics)
- Start state and goal test

- Search tree:


- Nodes: represent plans for reaching states
- Plans have costs (sum of action costs)

- Search algorithm:

- Systematically builds a search tree (hopefully only fraction of entire search tree!)
- Chooses an ordering of the fringe (unexplored nodes)
- Optimal: finds least-cost plans

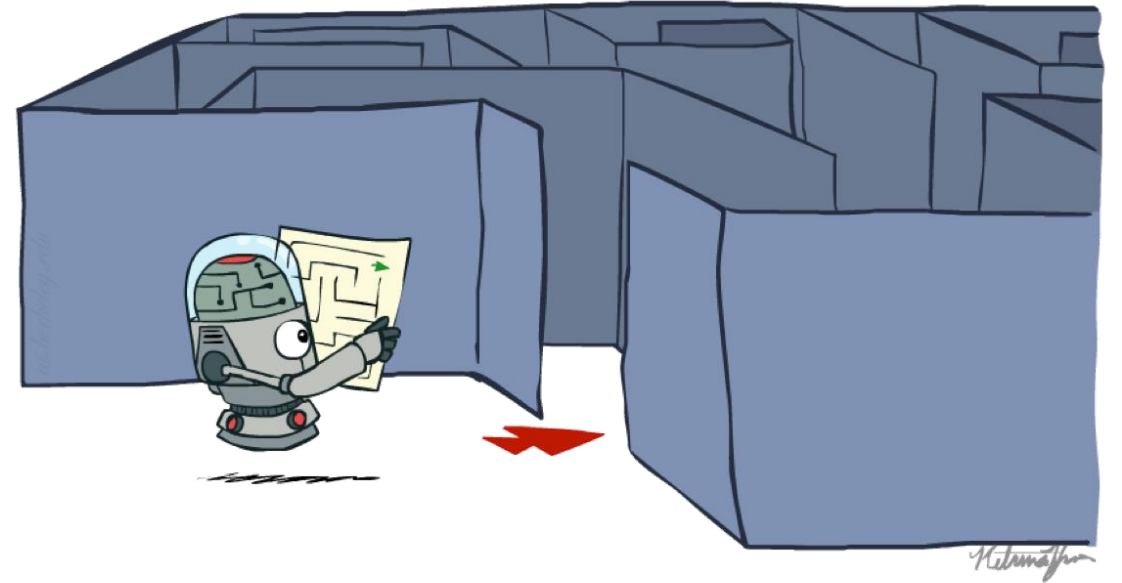

Example: Pancake Problem

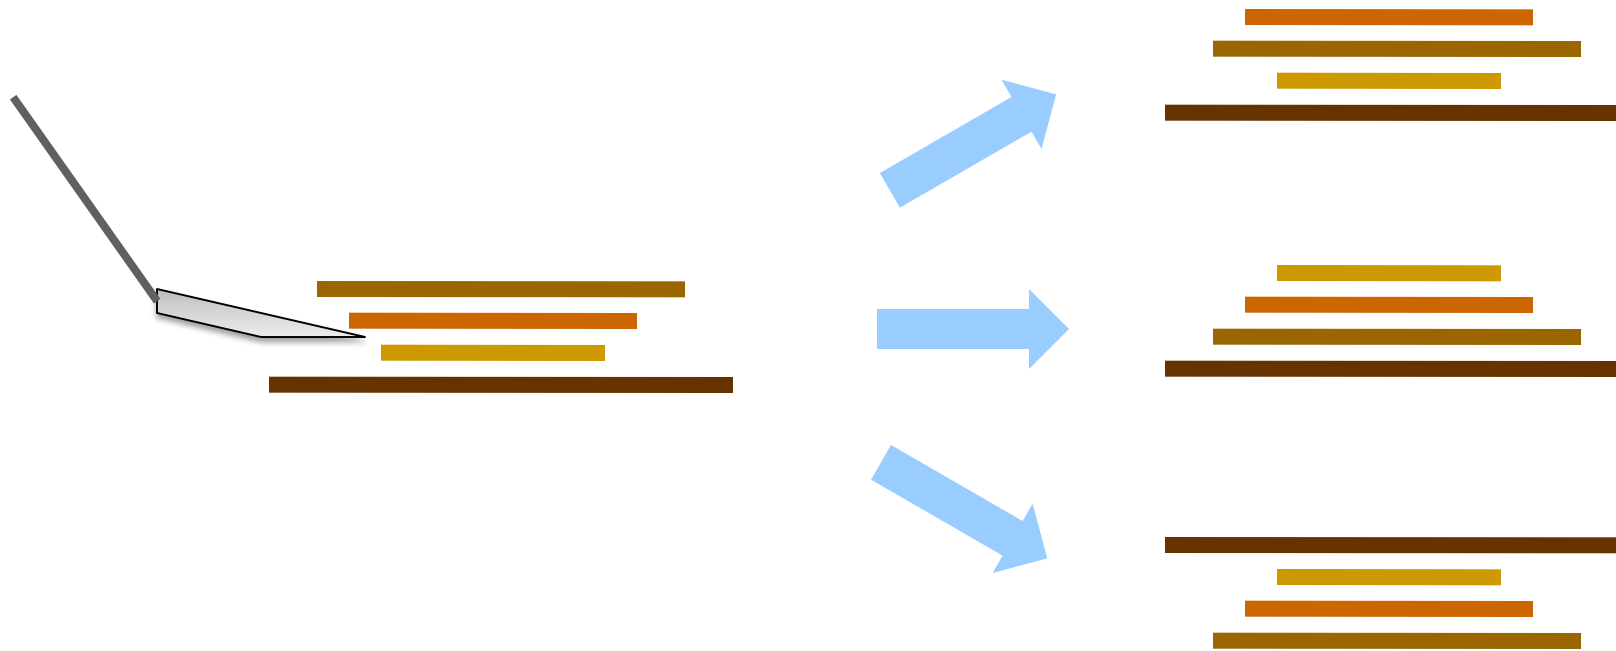

Cost: Number of pancakes flipped

Example: Pancake Problem

BOUNDS FOR SORTING BY PREFIX REVERSAL

William H. GATES

Microsoft, Albuquerque, New Mexico

Christos H. PAPANIMITRIOU*†

Department of Electrical Engineering, University of California, Berkeley, CA 94720, U.S.A.


Received 18 January 1978

Revised 28 August 1978

For a permutation σ of the integers from 1 to n , let $f(\sigma)$ be the smallest number of prefix reversals that will transform σ to the identity permutation, and let $f(n)$ be the largest such $f(\sigma)$ for all σ in (the symmetric group) S_n . We show that $f(n) \leq (5n+5)/3$, and that $f(n) \geq 17n/16$ for n a multiple of 16. If, furthermore, each integer is required to participate in an even number of reversed prefixes, the corresponding function $g(n)$ is shown to obey $3n/2 - 1 \leq g(n) \leq 2n + 3$.


Example: Pancake Problem

State space graph with costs as weights (slide doesn't contain entire state space graph)

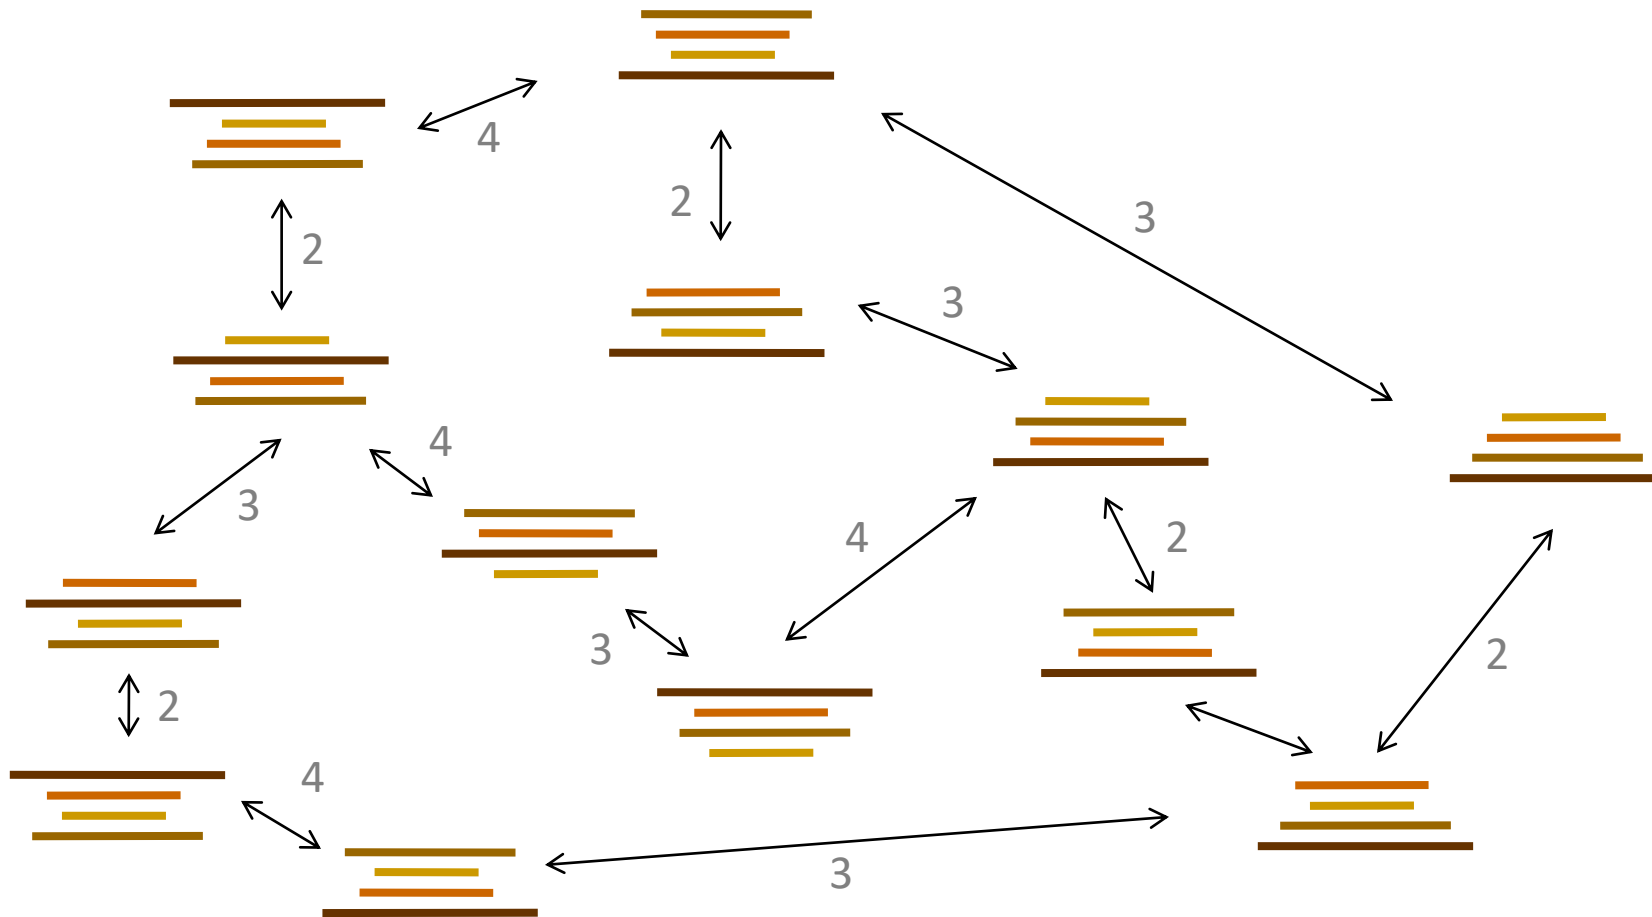


General Tree Search

```
function TREE-SEARCH(problem, strategy) returns a solution, or failure
  initialize the search tree using the initial state of problem
  loop do
    if there are no candidates for expansion then return failure
    choose a leaf node for expansion according to strategy
    if the node contains a goal state then return the corresponding solution
    else expand the node and add the resulting nodes to the search tree
  end
```

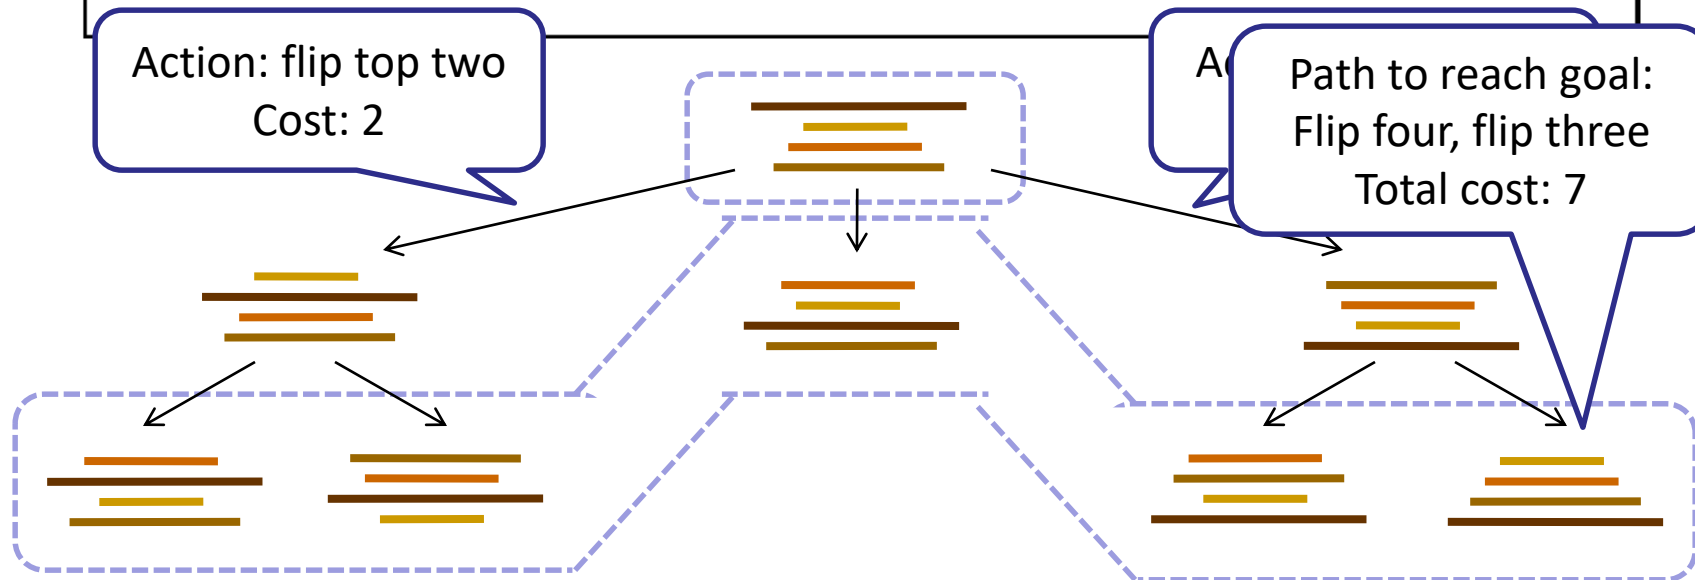


The One Queue

- All these search algorithms are the same except for fringe strategies
 - Conceptually, all fringes are priority queues (i.e. collections of nodes with attached priorities)
 - Practically, for DFS and BFS, you can avoid the $\log(n)$ overhead from an actual priority queue, by using stacks and queues
 - Can even code one implementation that takes a variable queuing object


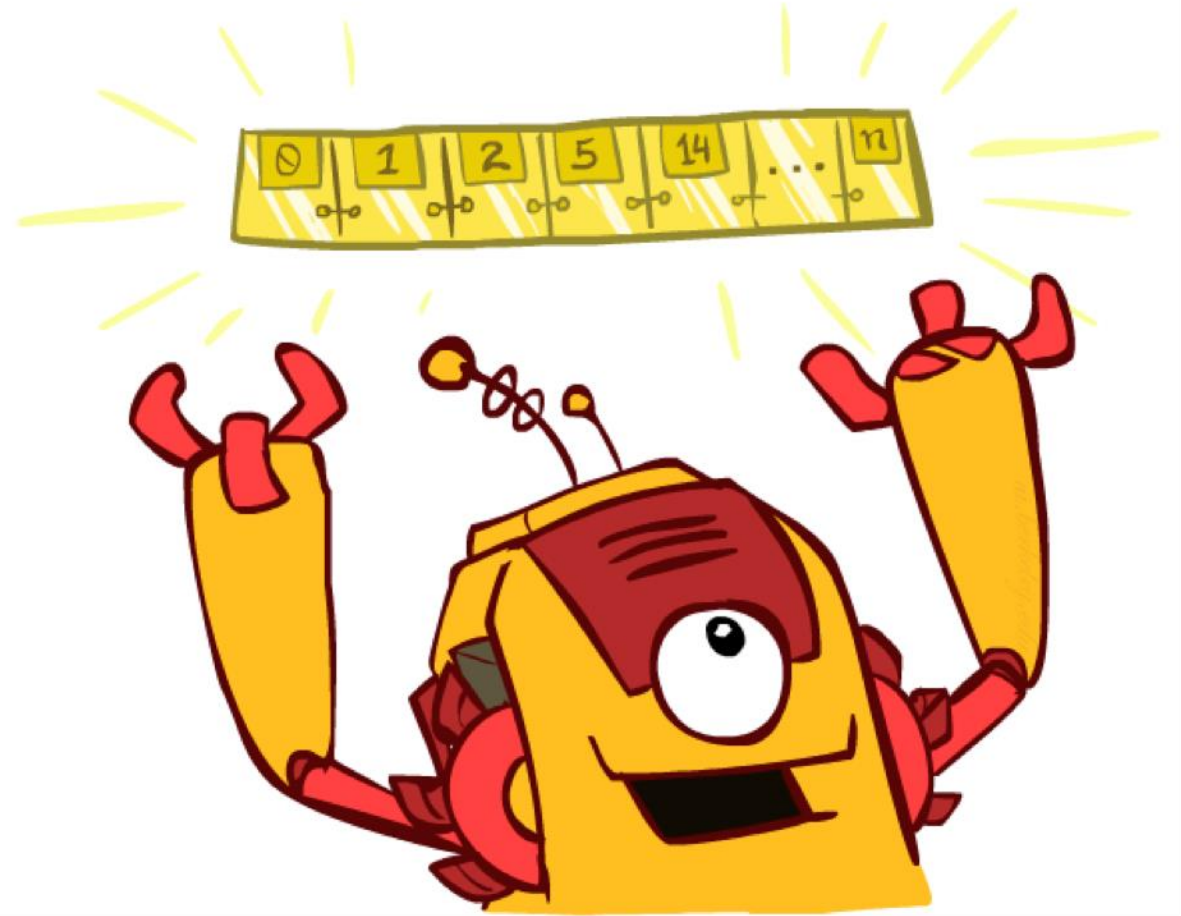


Uninformed Search

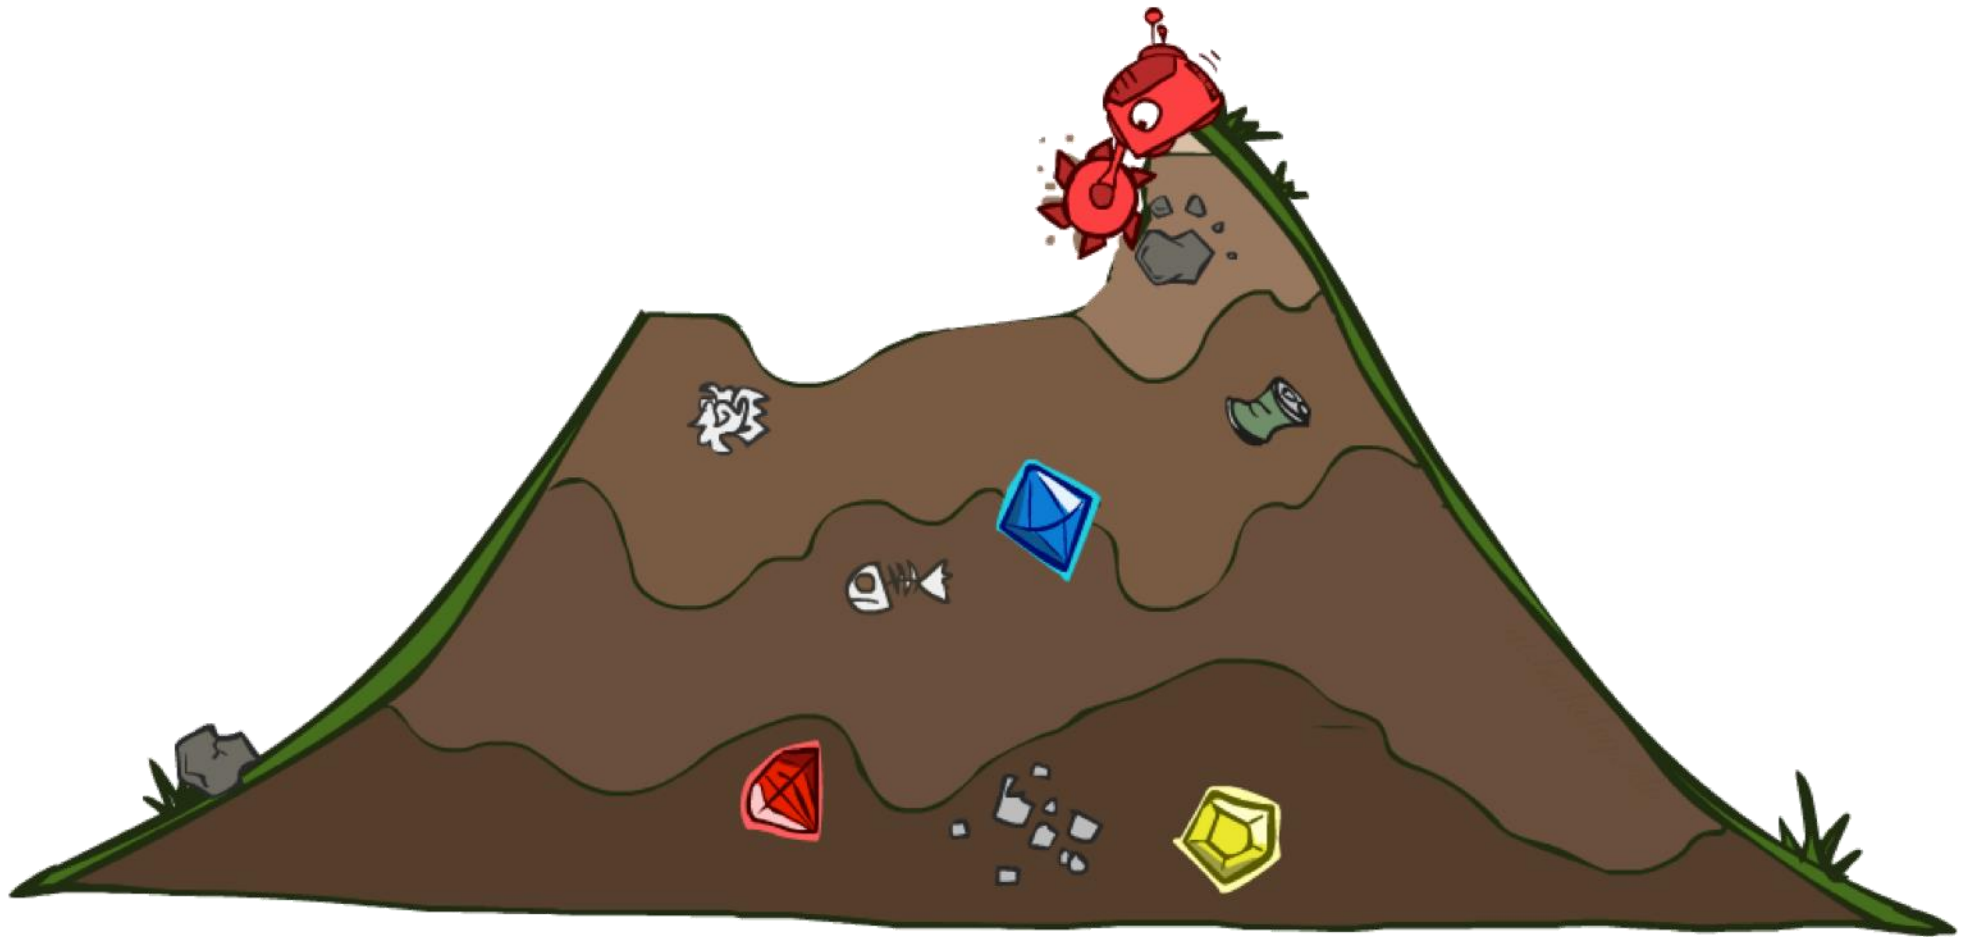

Uniform Cost Search


- Strategy: expand lowest path cost
- The good: UCS is complete and optimal!
- The bad:
 - Explores options in every “direction”
 - No information about goal location

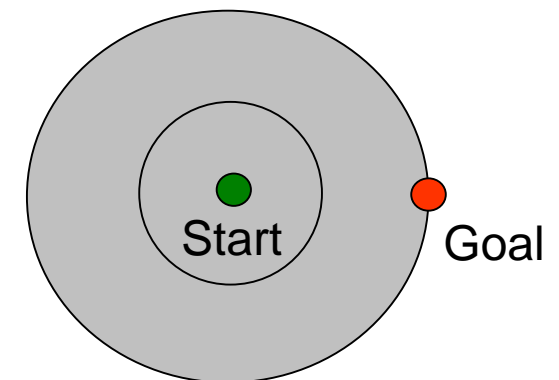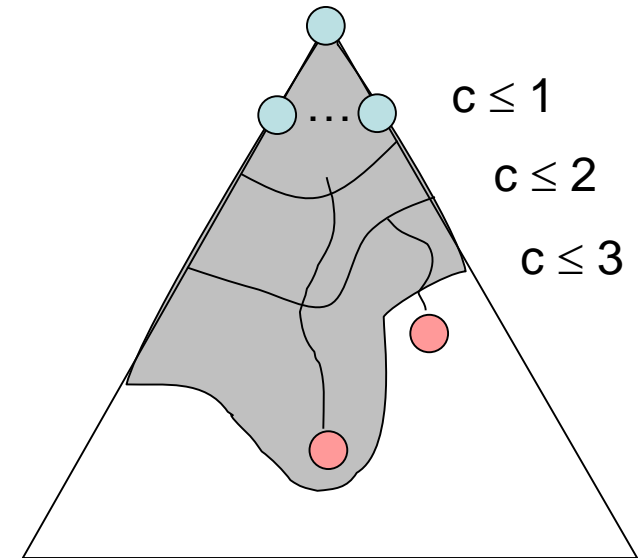


[Demo: contours UCS empty (L3D1)]

[Demo: contours UCS pacman small maze (L3D3)]


Video of Demo Empty UCS

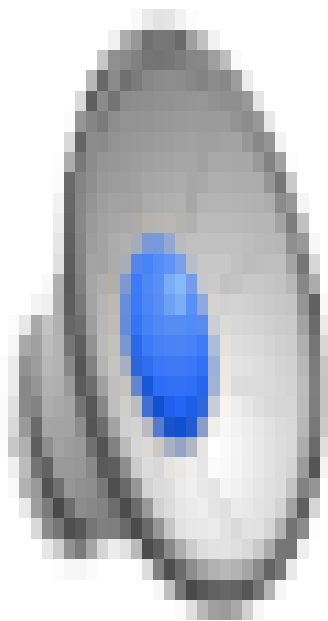


Video of Demo Maze with Deep/Shallow Water --- DFS, BFS, or UCS? (part 1)

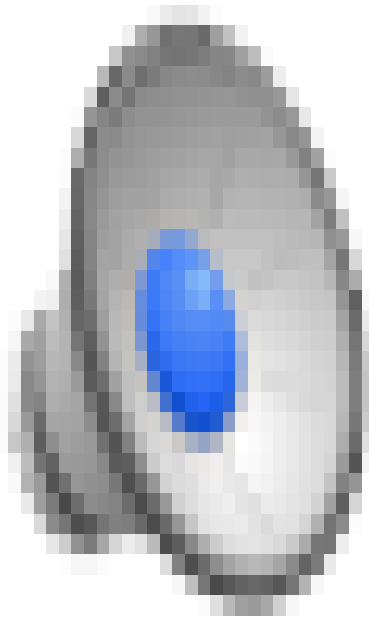


Video of Demo Maze with Deep/Shallow Water --- DFS, BFS, or UCS? (part 2)

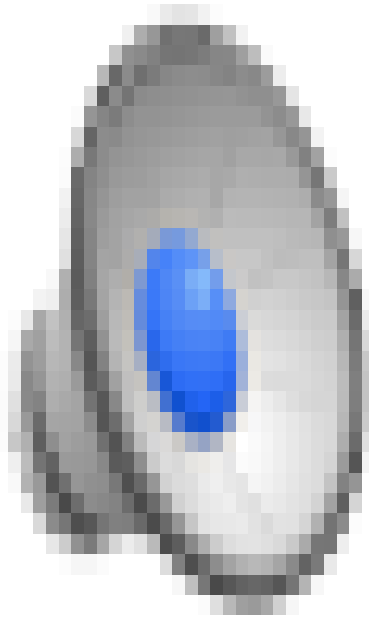


Video of Demo Maze with Deep/Shallow Water --- DFS, BFS, or UCS? (part 3)

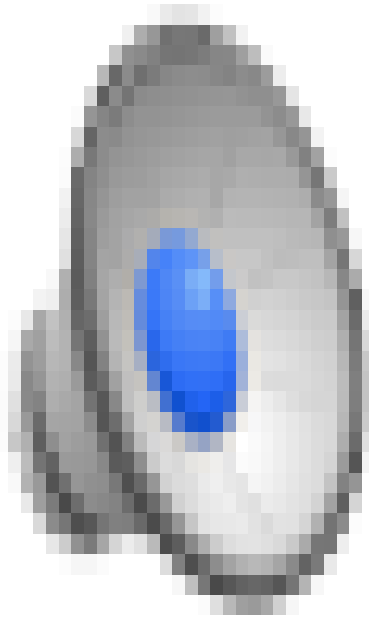

Video of Demo Contours UCS Pacman Small Maze



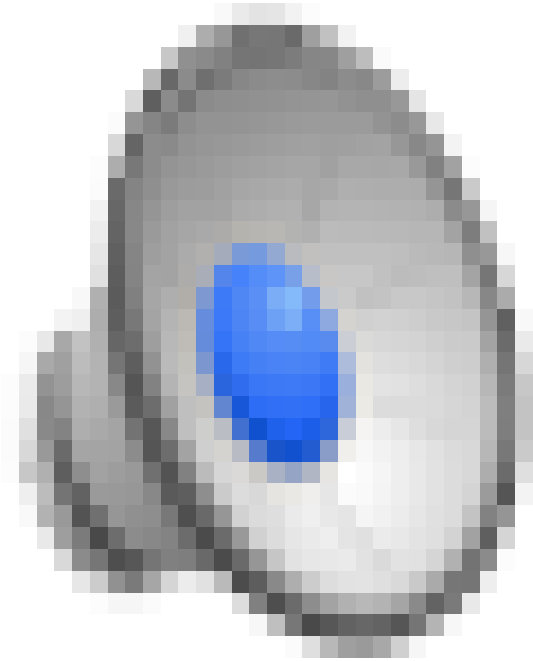


Informed Search

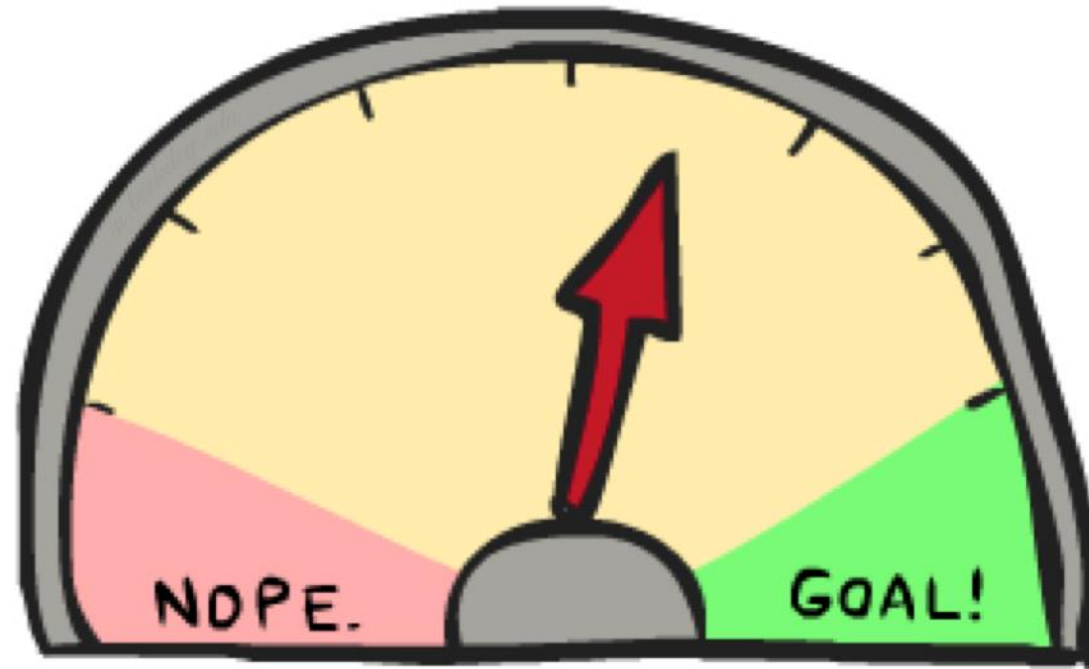


Search Heuristics

- A heuristic is:
 - A function that *estimates* how close a state is to a goal
 - Designed for a particular search problem
 - Examples: Manhattan distance, Euclidean distance for pathing

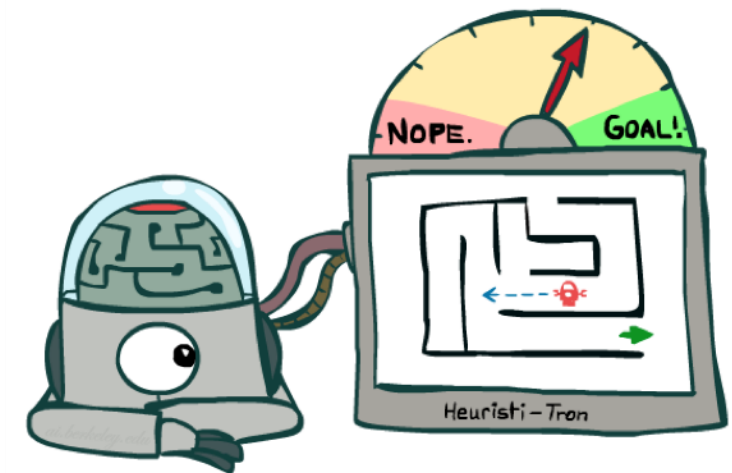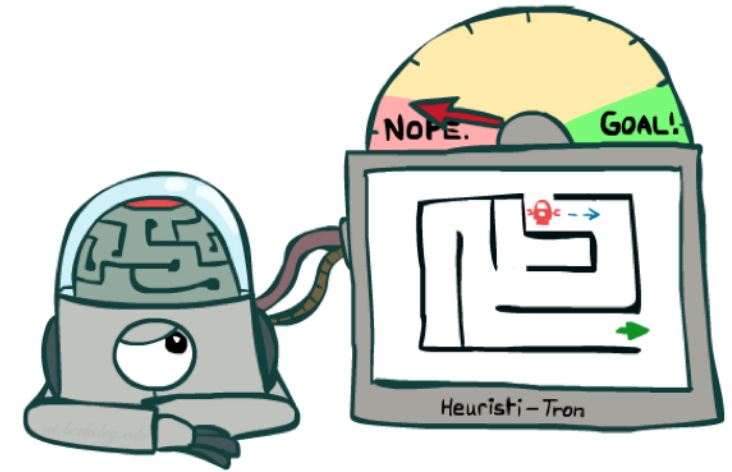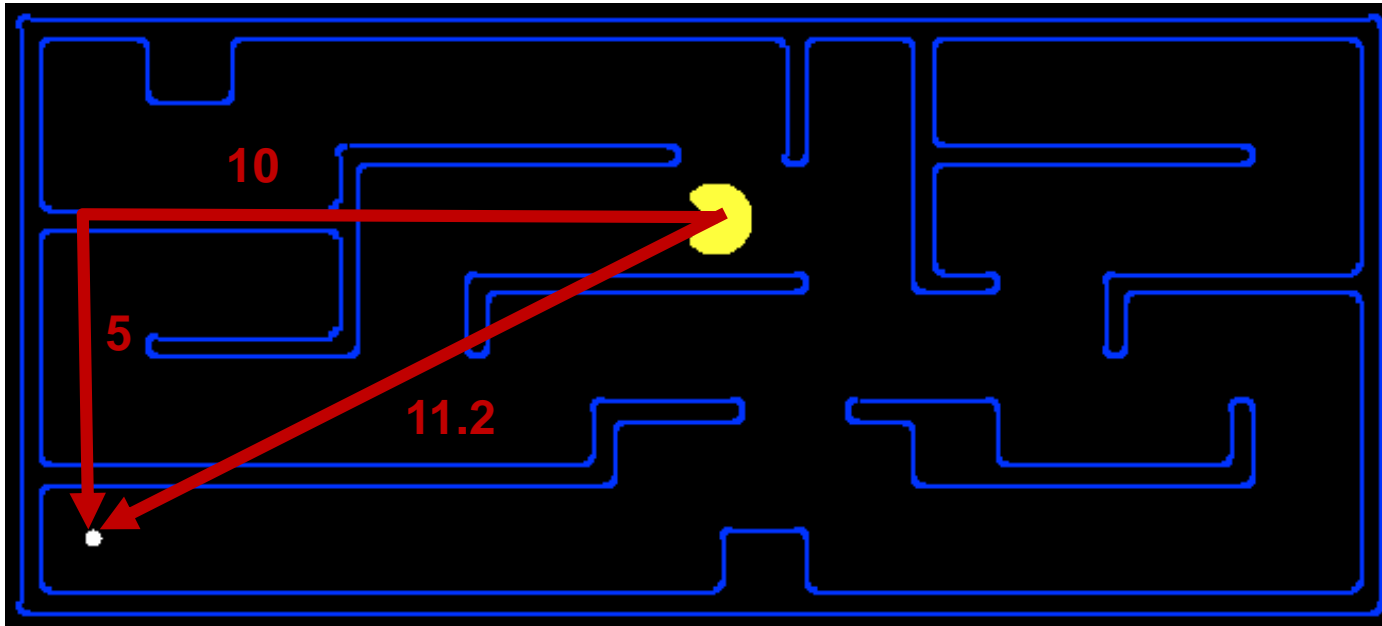

Example: Heuristic Function

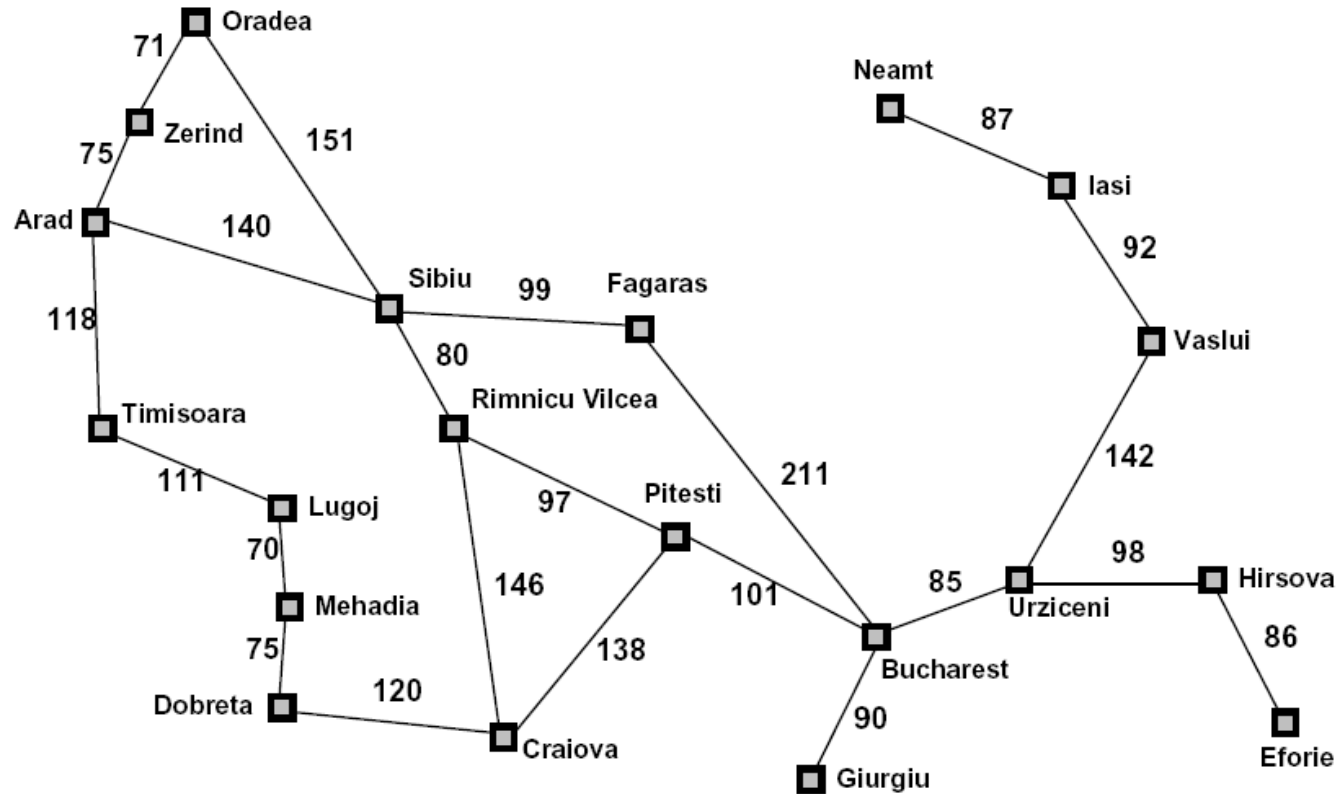


Straight-line distance to Bucharest	
Arad	366
Bucharest	0
Craiova	160
Dobreta	242
Eforie	161
Fagaras	178
Giurgiu	77
Hirsova	151
Iasi	226
Lugoj	244
Mehadia	241
Neamt	234
Oradea	380
Pitesti	98
Rimnicu Vilcea	193
Sibiu	253
Timisoara	329
Urziceni	80
Vaslui	199
Zerind	374

$h(x)$

Example: Heuristic Function


Heuristic: the number of the largest pancake that is still out of place

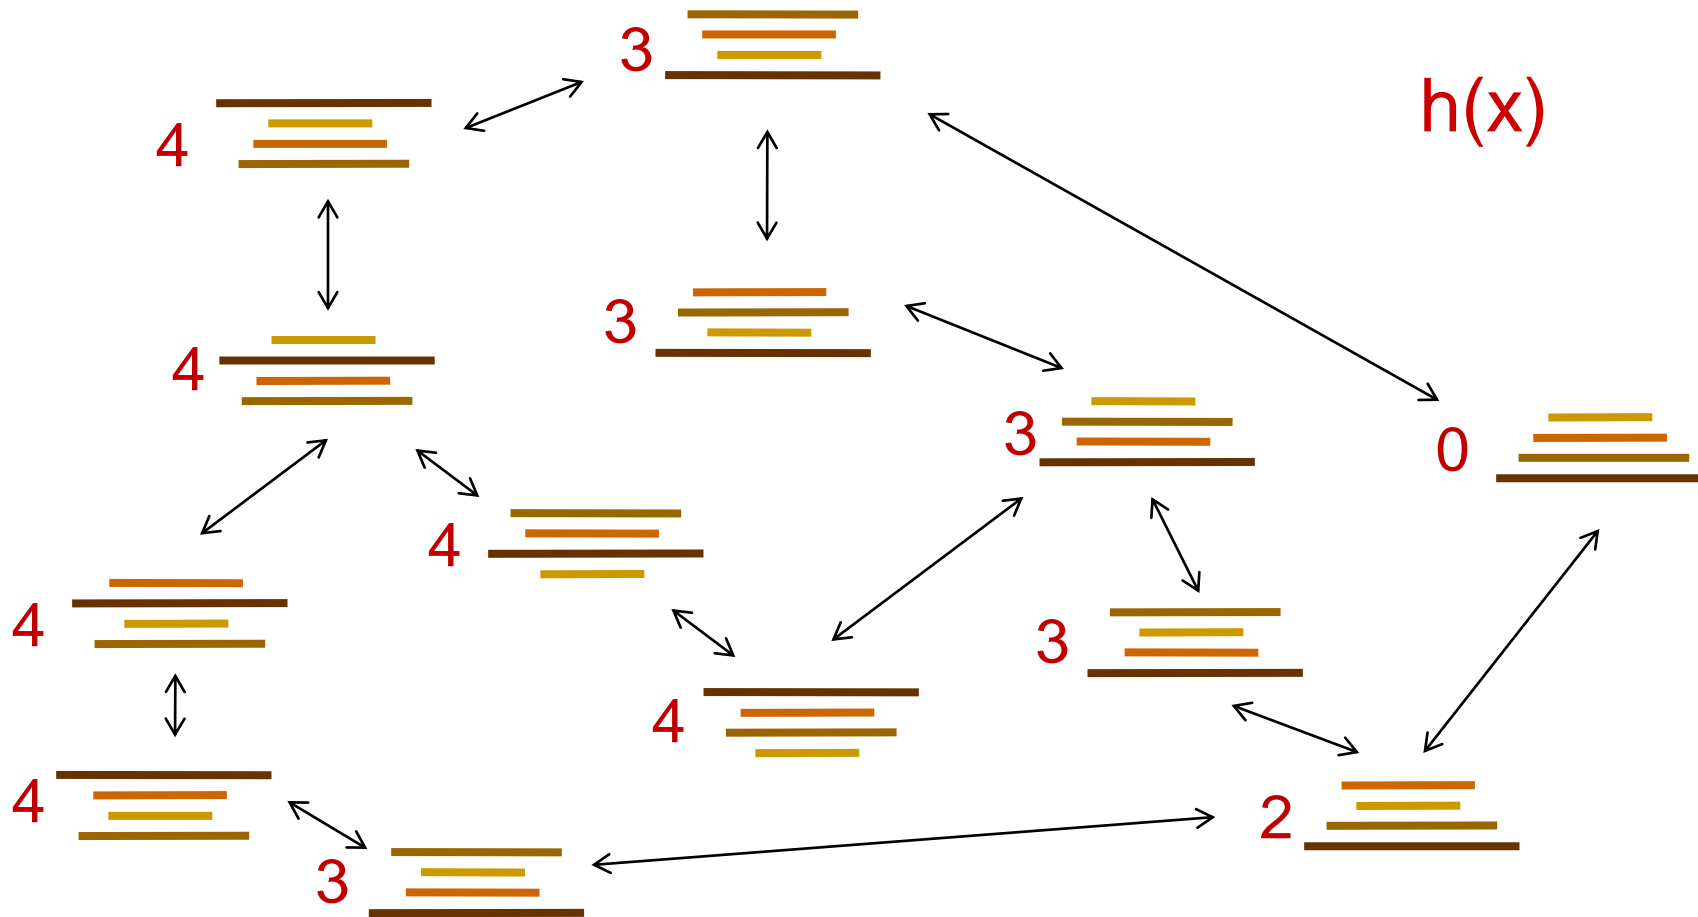

Greedy Search



Example: Heuristic Function

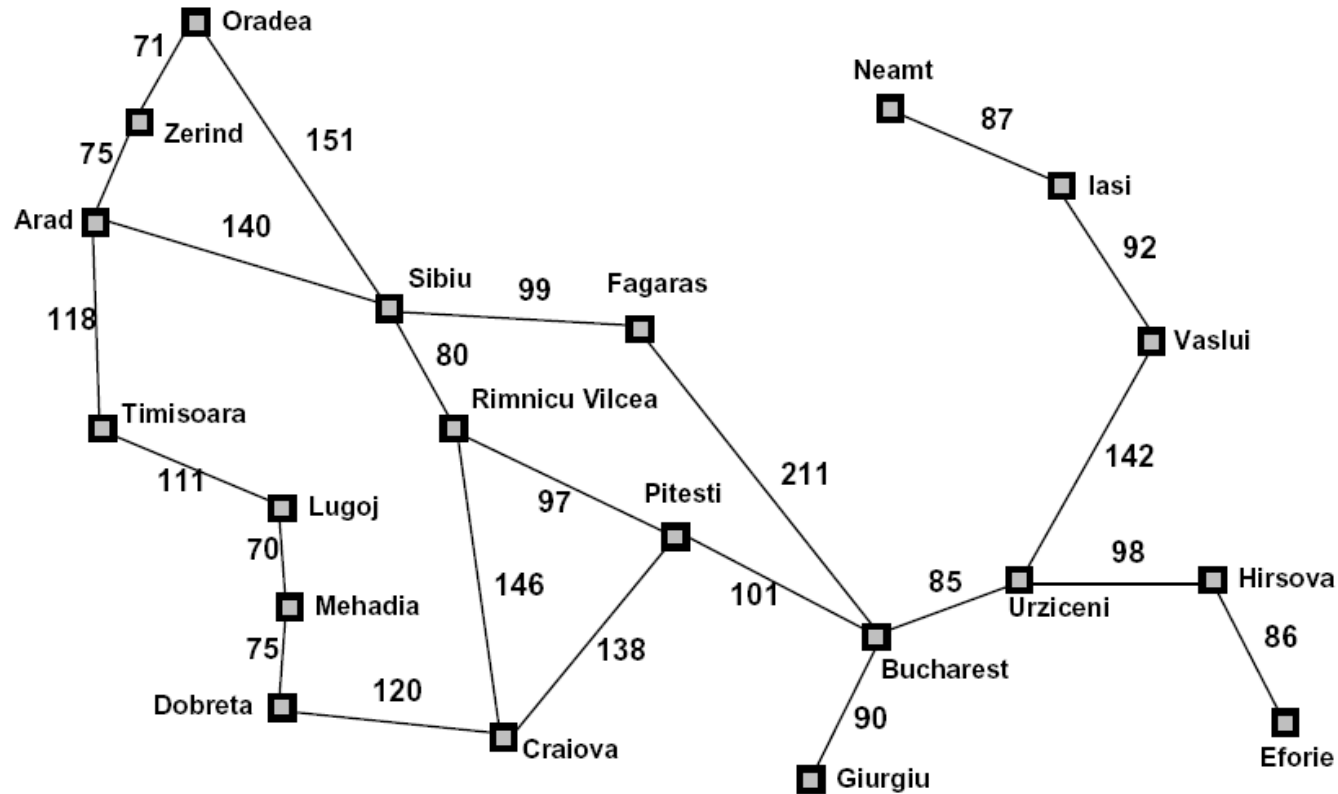


Straight-line distance to Bucharest	
Arad	366
Bucharest	0
Craiova	160
Dobreta	242
Eforie	161
Fagaras	178
Giurgiu	77
Hirsova	151
Iasi	226
Lugoj	244
Mehadia	241
Neamt	234
Oradea	380
Pitesti	98
Rimnicu Vilcea	193
Sibiu	253
Timisoara	329
Urziceni	80
Vaslui	199
Zerind	374



$h(x)$

Greedy Search

- Expand the node that seems closest...


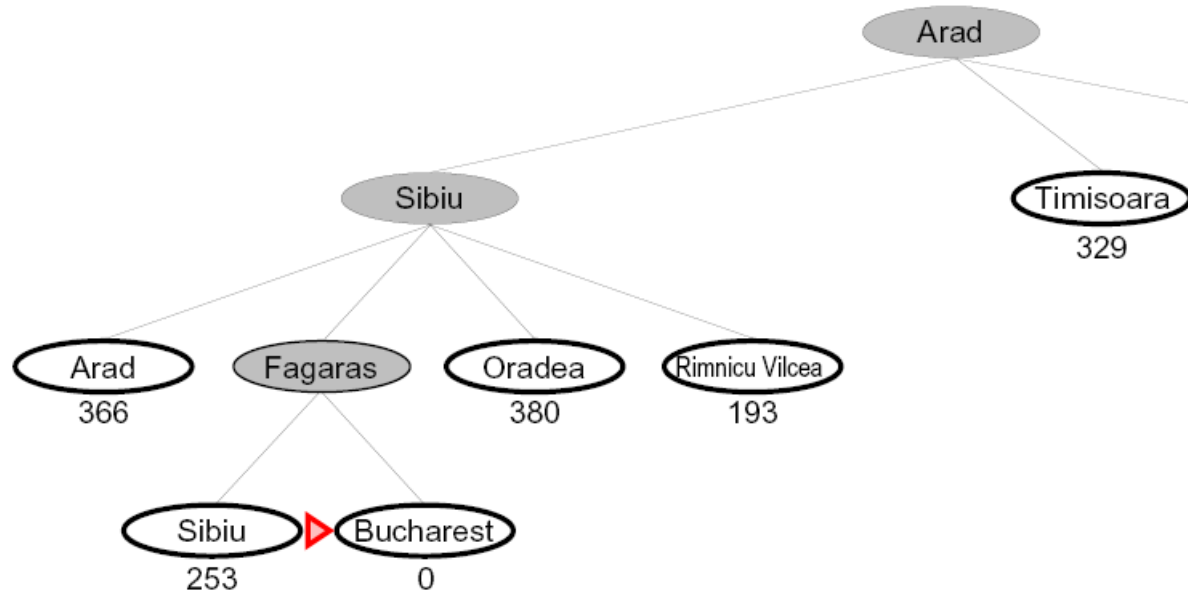


- What can go wrong?

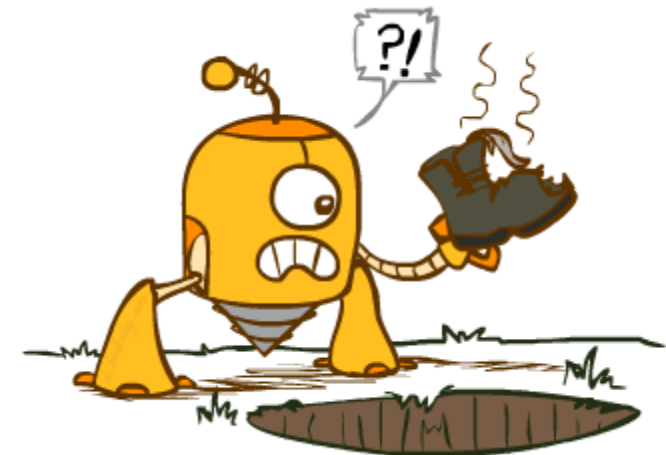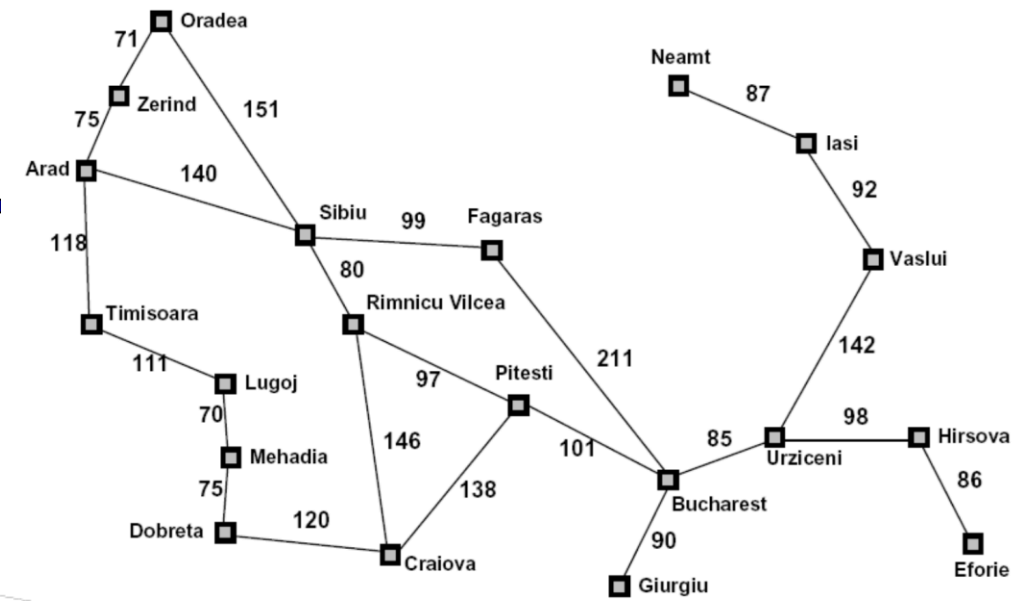

Greedy Search


- Strategy: expand a node that you think is closest to a goal state
 - Heuristic: estimate of distance to nearest goal for each state
- A common case:
 - Best-first takes you straight to the (wrong) goal
- Worst-case: like a badly-guided DFS

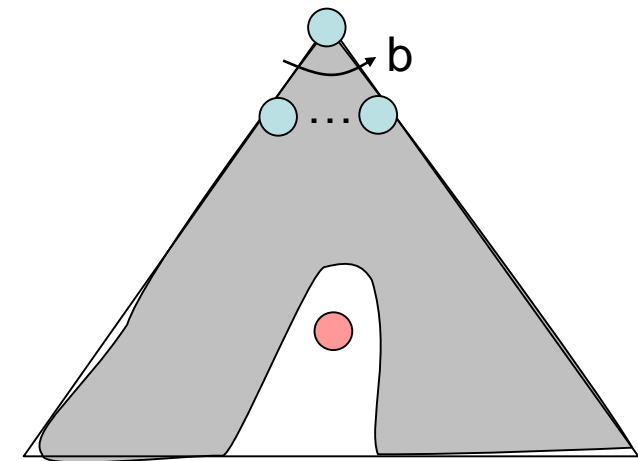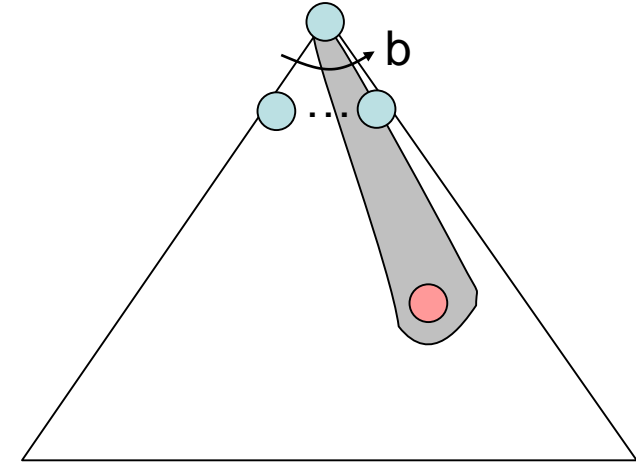


[Demo: contours greedy empty (L3D1)]

[Demo: contours greedy pacman small maze (L3D4)]

Video of Demo Contours Greedy (Empty)

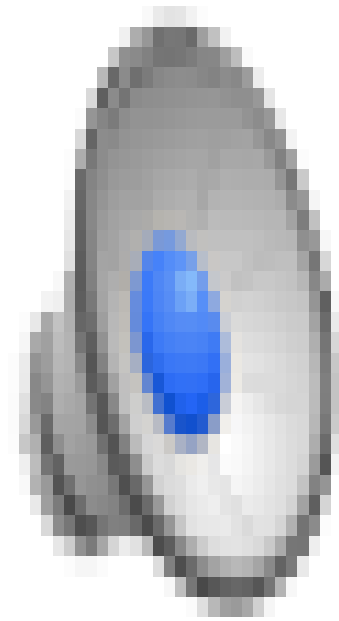

Video of Demo Contours Greedy (Pacman Small Maze)

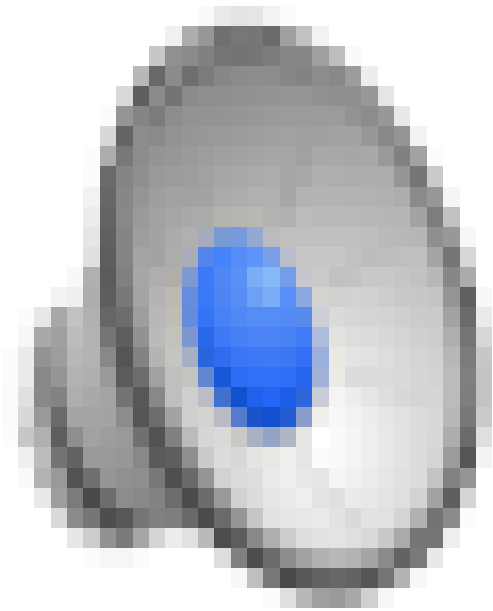



A* Search



A* Search

Combining UCS and Greedy


- Uniform-cost orders by path cost, or *backward cost* $g(n)$
- Greedy orders by goal proximity, or *forward cost* $h(n)$

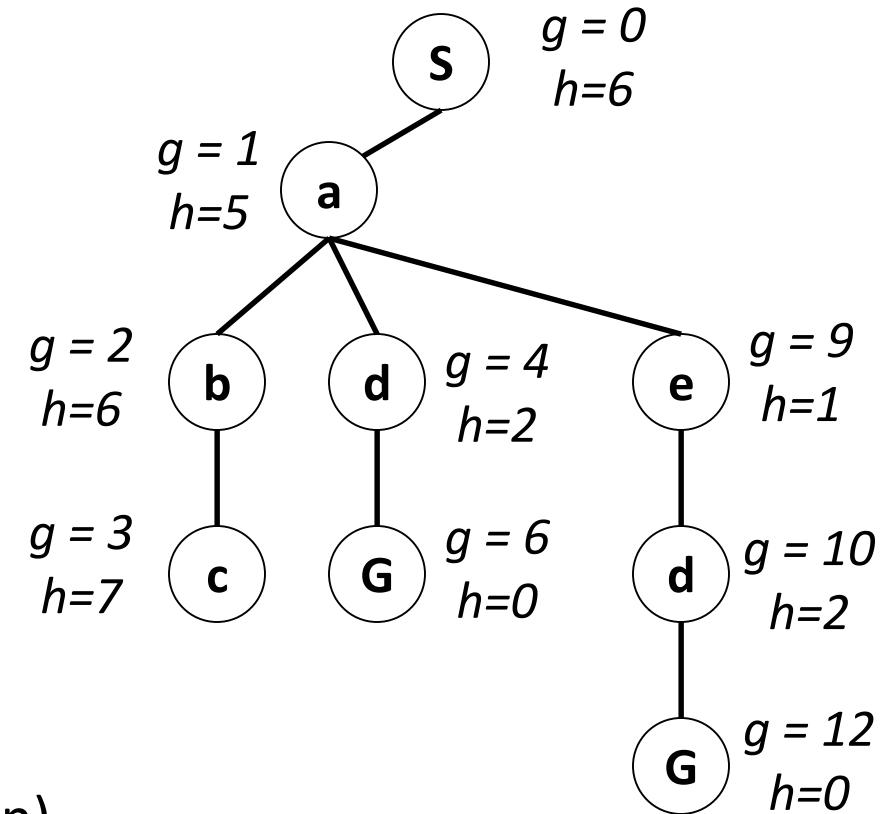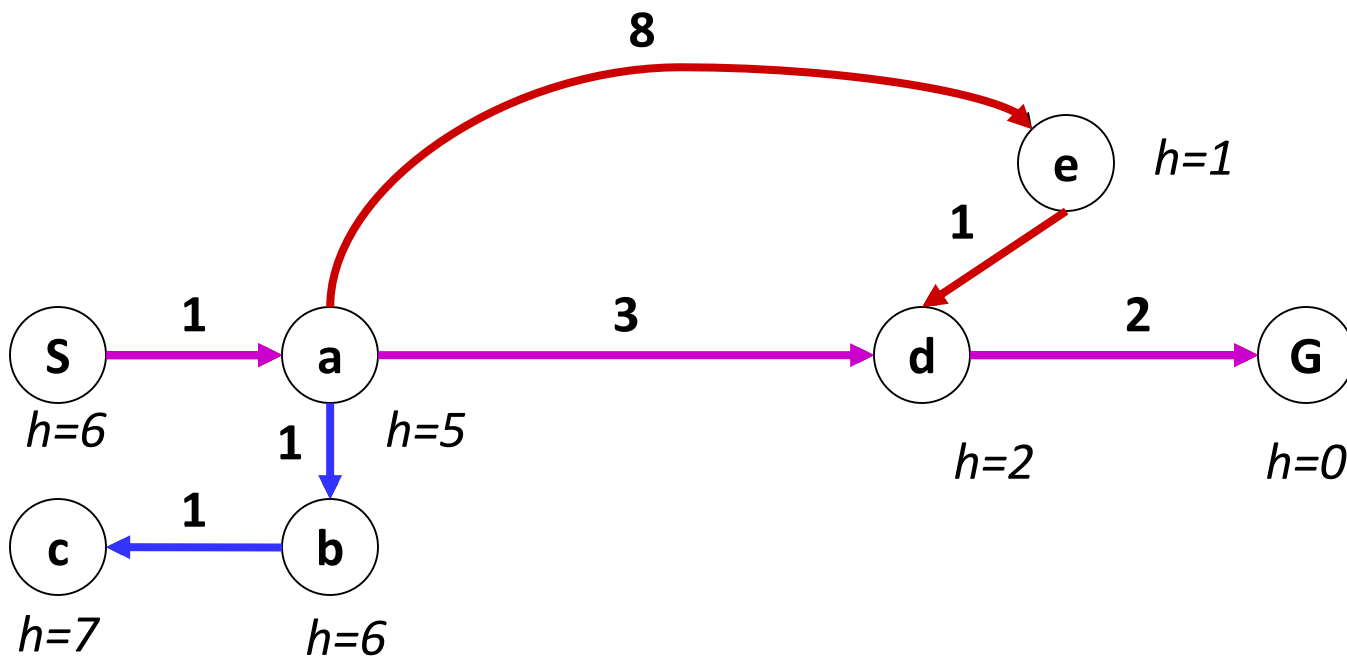

- A* Search orders by the sum: $f(n) = g(n) + h(n)$


When should A* terminate?

- Should we stop when we enqueue a goal?

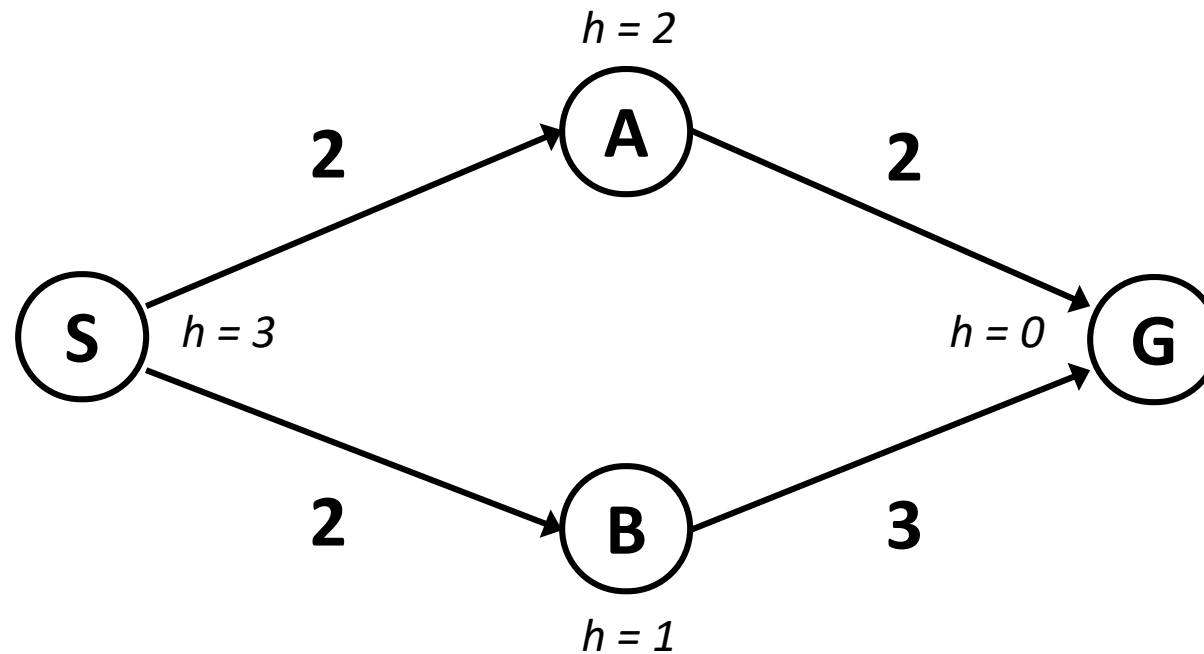


- No: only stop when we dequeue a goal

Is A* Optimal?

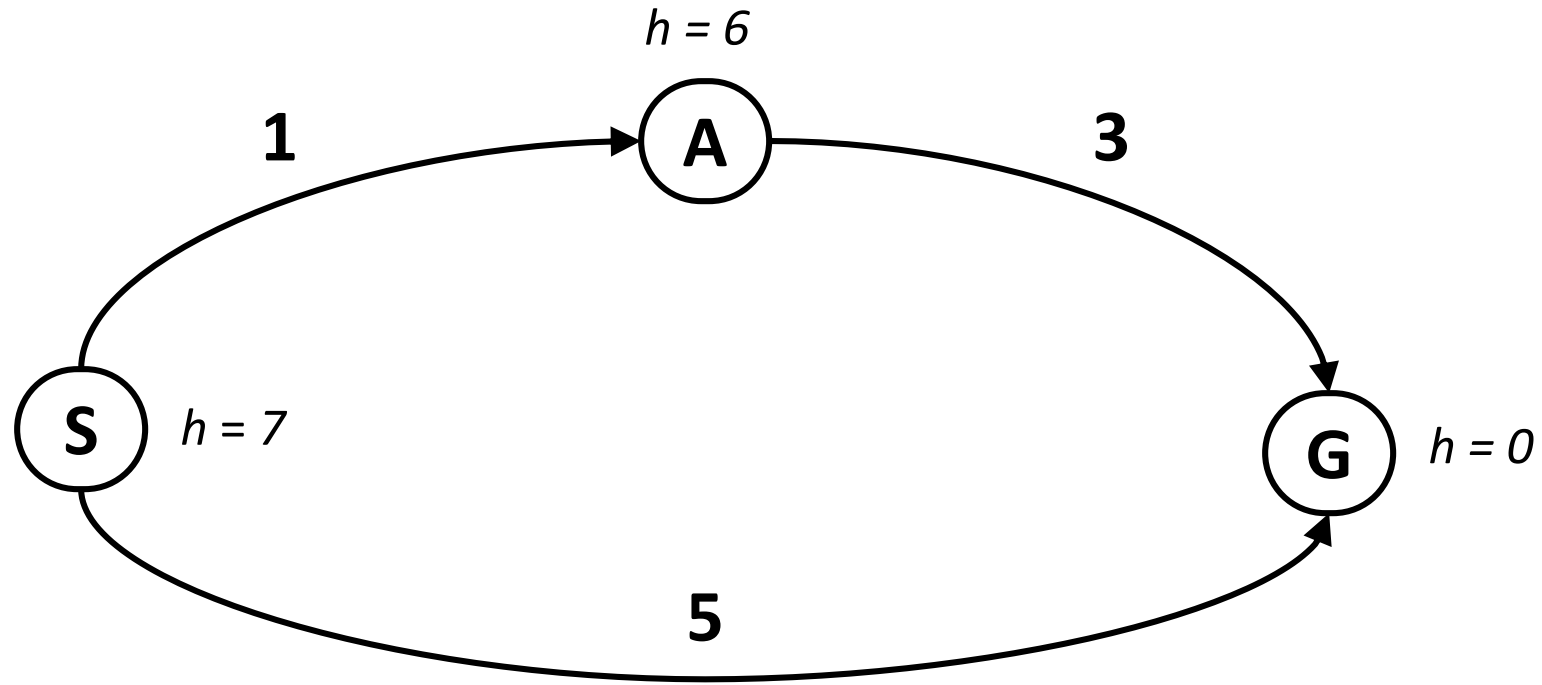


- What went wrong?
- Actual bad goal cost < estimated good goal cost
- We need estimates to be less than actual costs!


Admissible Heuristics

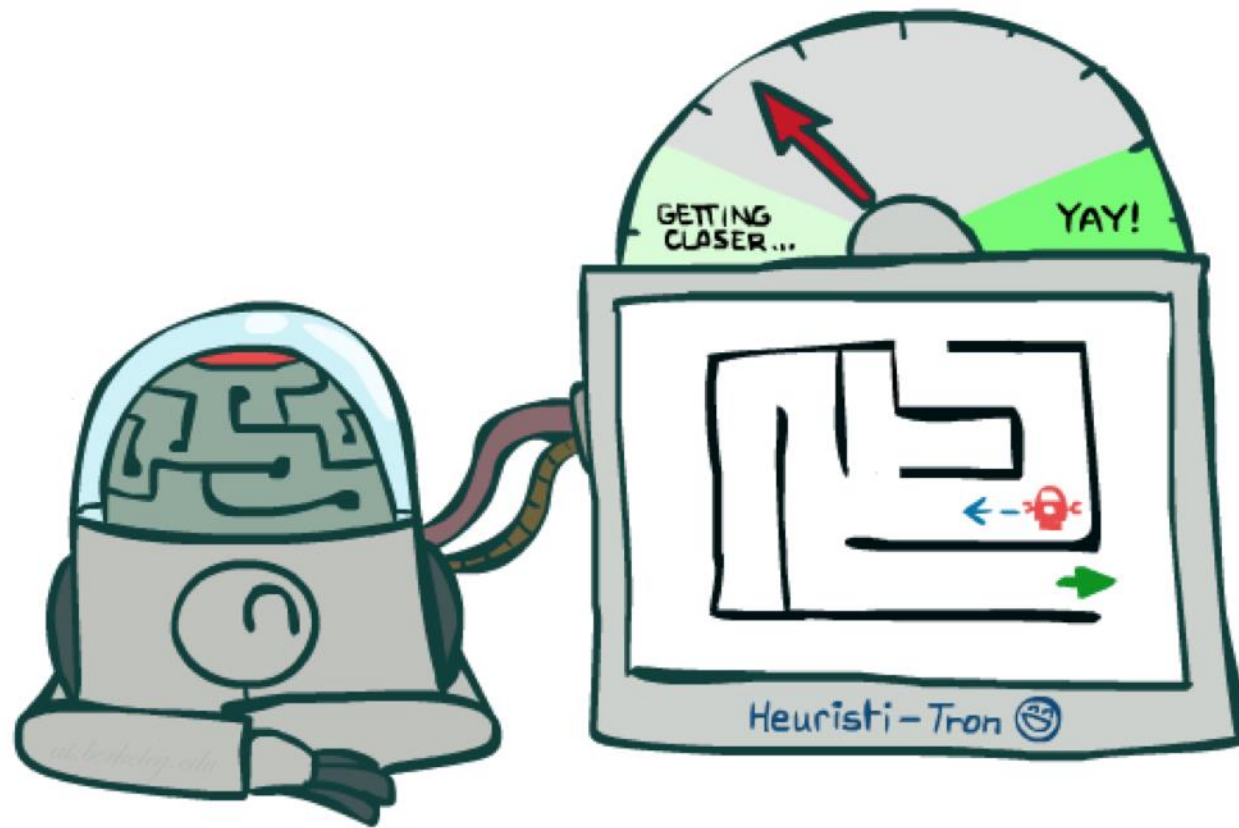

Idea: Admissibility

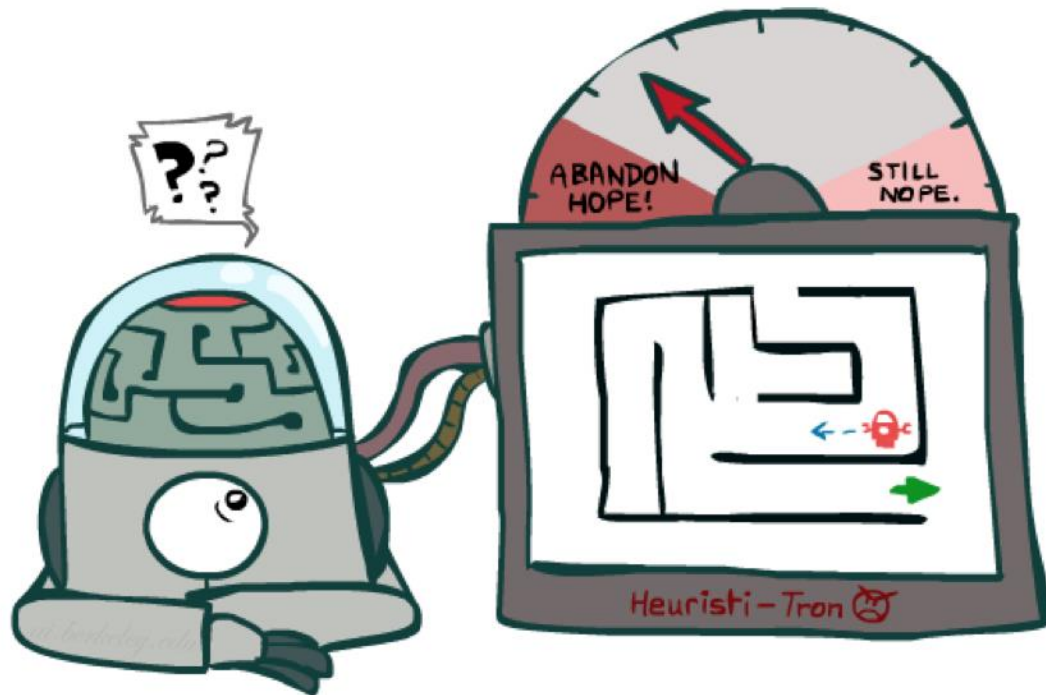

Inadmissible (pessimistic) heuristics break optimality by trapping good plans on the fringe

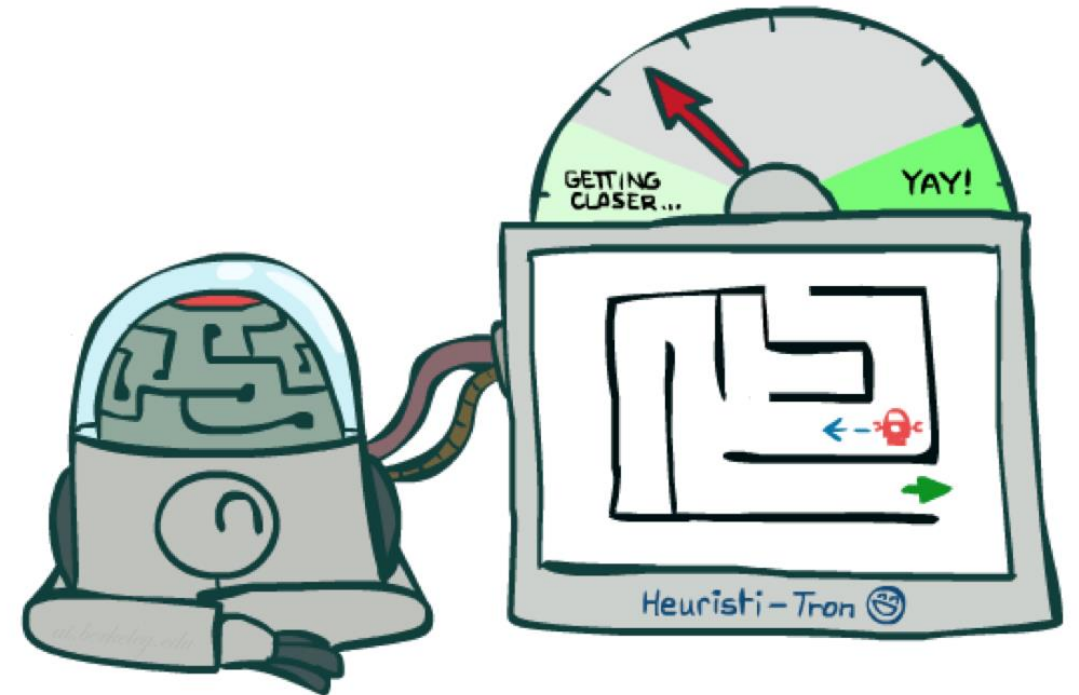

Admissible (optimistic) heuristics slow down bad plans but never outweigh true costs


Admissible Heuristics

- A heuristic h is *admissible* (optimistic) if:

$$0 \leq h(n) \leq h^*(n)$$

where $h^*(n)$ is the true cost to a nearest goal

- Examples:

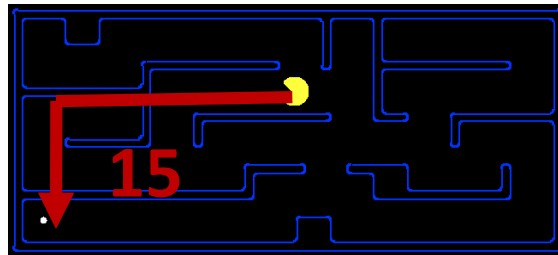


4



- Coming up with admissible heuristics is most of what's involved in using A* in practice.

Optimality of A* Tree Search

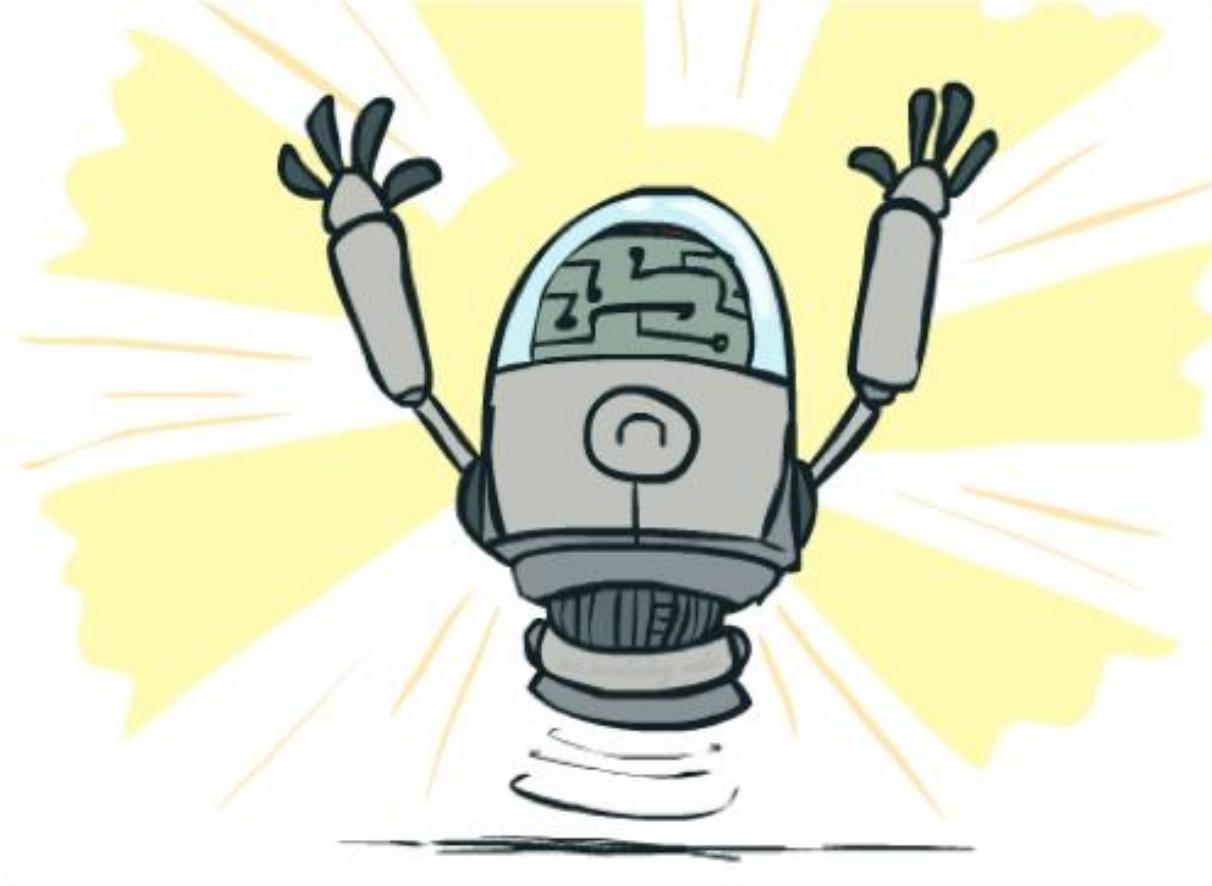


Optimality of A* Tree Search

Assume:

- A is an optimal goal node
- B is a suboptimal goal node
- h is admissible

Claim:


- A will exit the fringe before B

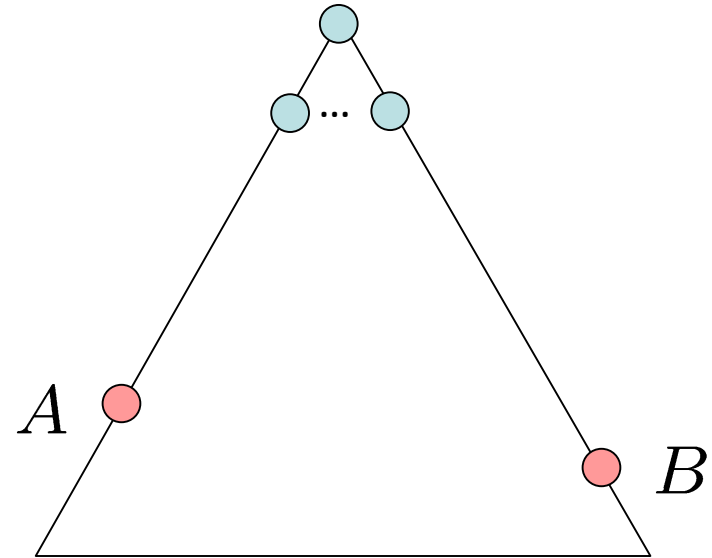

Optimality of A* Tree Search: Blocking

Proof:

- Imagine B is on the fringe
- Some ancestor n of A is on the fringe, too (maybe A!)
- Claim: n will be expanded before B
 1. $f(n)$ is less or equal to $f(A)$

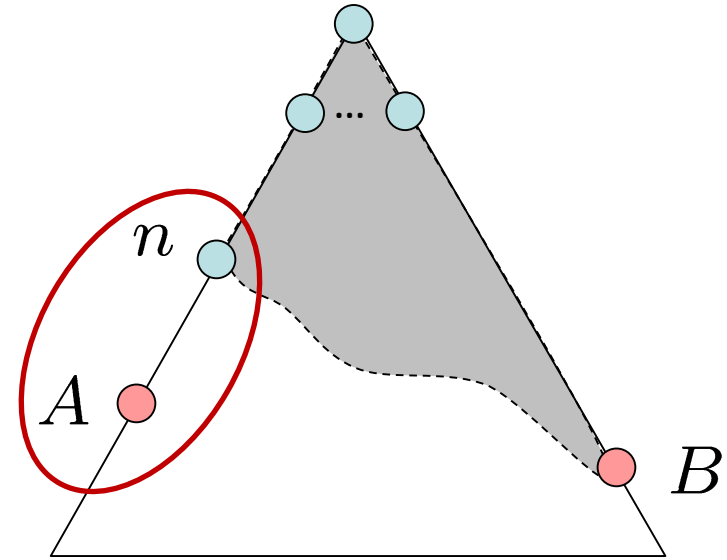

$$f(n) = g(n) + h(n)$$

$$f(n) \leq g(A)$$

$$g(A) = f(A)$$

Definition of f-cost


Admissibility of h

$h = 0$ at a goal

Optimality of A* Tree Search: Blocking

Proof:

- Imagine B is on the fringe
- Some ancestor n of A is on the fringe, too (maybe A!)
- Claim: n will be expanded before B
 1. $f(n)$ is less or equal to $f(A)$
 2. $f(A)$ is less than $f(B)$

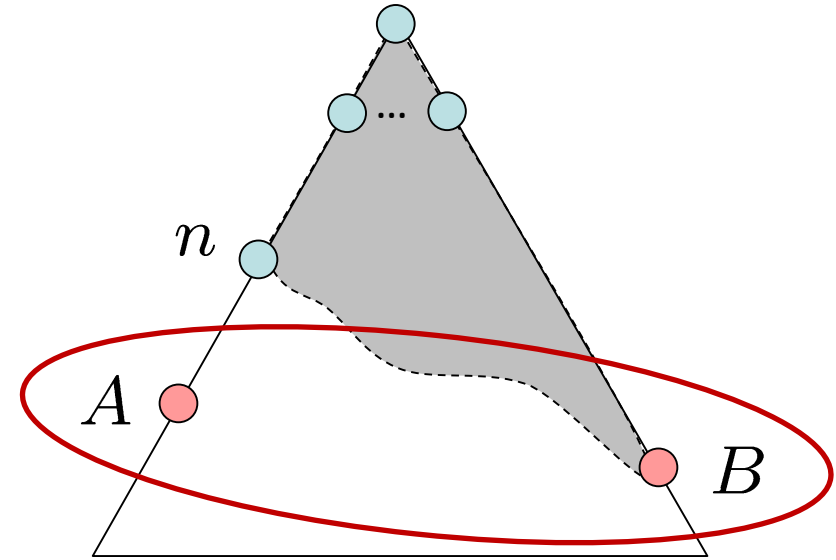

$$g(A) < g(B)$$

$$f(A) < f(B)$$


B is suboptimal

$h = 0$ at a goal

Optimality of A* Tree Search: Blocking

Proof:

- Imagine B is on the fringe
- Some ancestor n of A is on the fringe, too (maybe A!)
- Claim: n will be expanded before B
 1. $f(n)$ is less or equal to $f(A)$
 2. $f(A)$ is less than $f(B)$
 3. n expands before B
- All ancestors of A expand before B
- A expands before B
- A* search is optimal

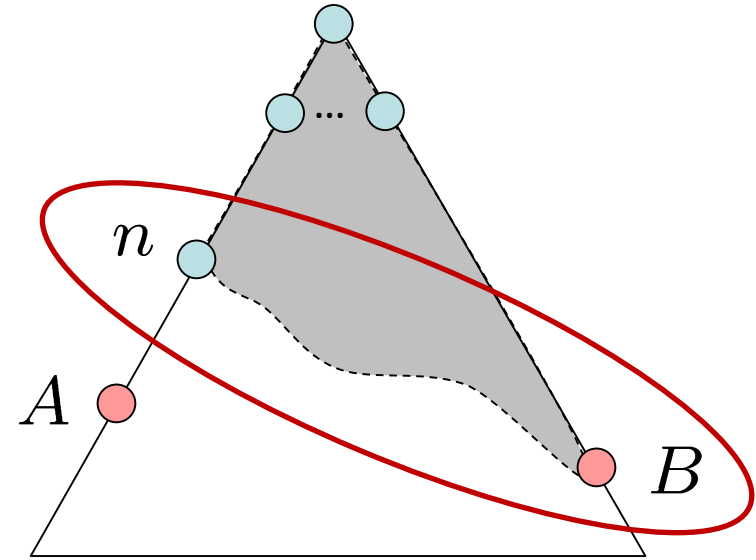


$$f(n) \leq f(A) < f(B)$$


Properties of A^*

Properties of A*

Uniform-Cost


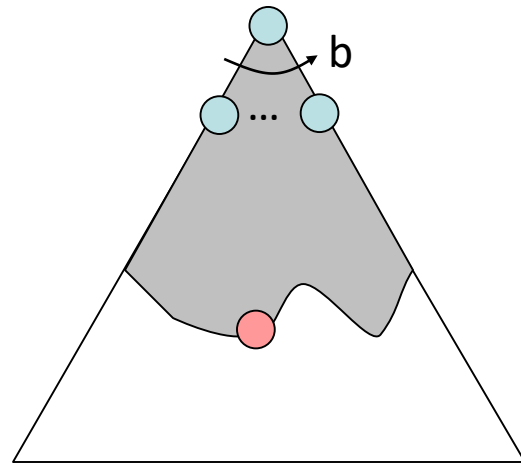


A*

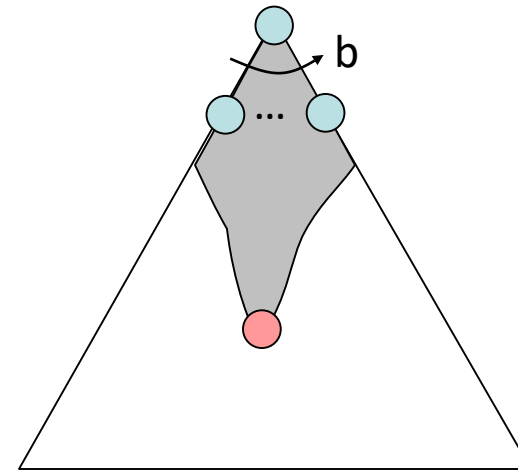

UCS vs A* Contours


- Uniform-cost expands equally in all “directions”
- A* expands mainly toward the goal, but does hedge its bets to ensure optimality

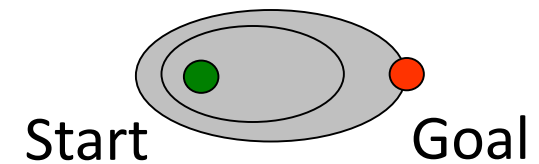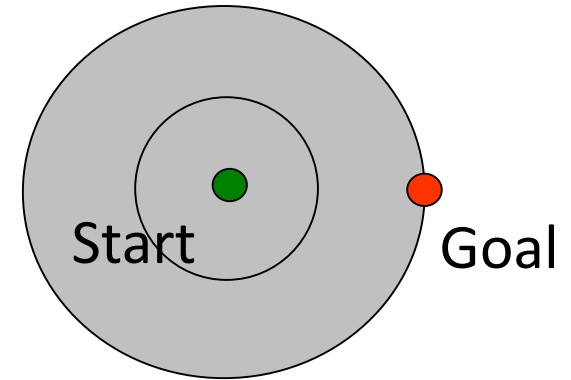


[Demo: contours UCS / greedy / A* empty (L3D1)]

[Demo: contours A* pacman small maze (L3D5)]


Video of Demo Contours (Empty) -- UCS

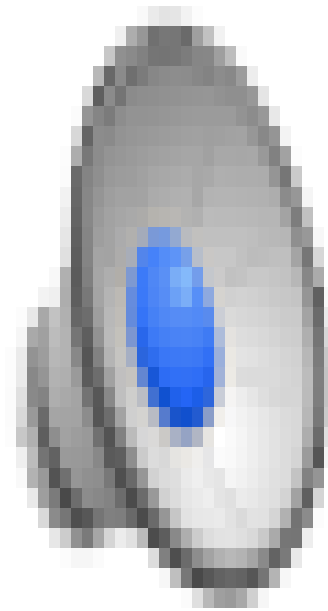


Video of Demo Contours (Empty) -- Greedy

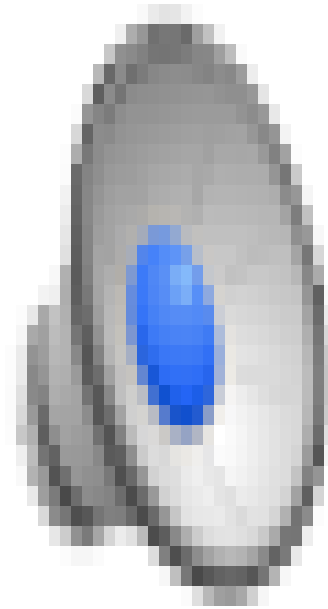

Video of Demo Contours (Empty) – A*

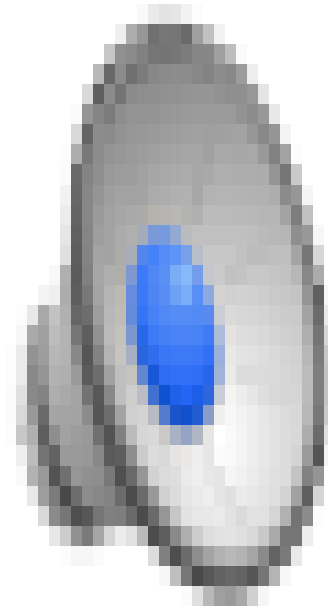

Video of Demo Contours (Pacman Small Maze) – A*

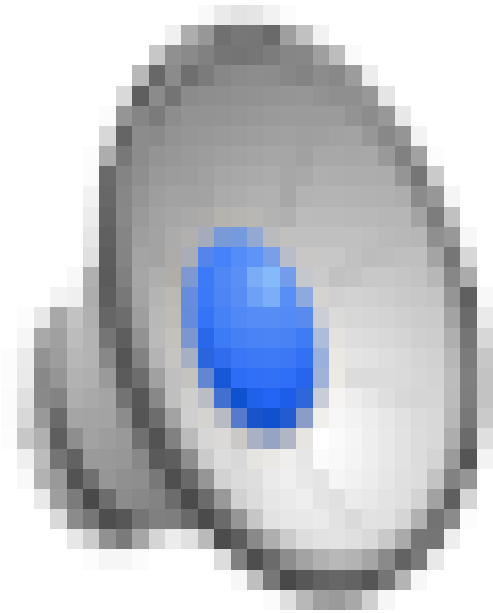

Comparison



Greedy



Uniform Cost



A*


A* Applications

- Video games
- Pathing / routing problems
- Resource planning problems
- Robot motion planning
- Language analysis
- Machine translation
- Speech recognition
- ...




[Demo: UCS / A* pacman tiny maze (L3D6,L3D7)]
[Demo: guess algorithm Empty Shallow/Deep (L3D8)]

Video of Demo Pacman (Tiny Maze) – UCS / A*

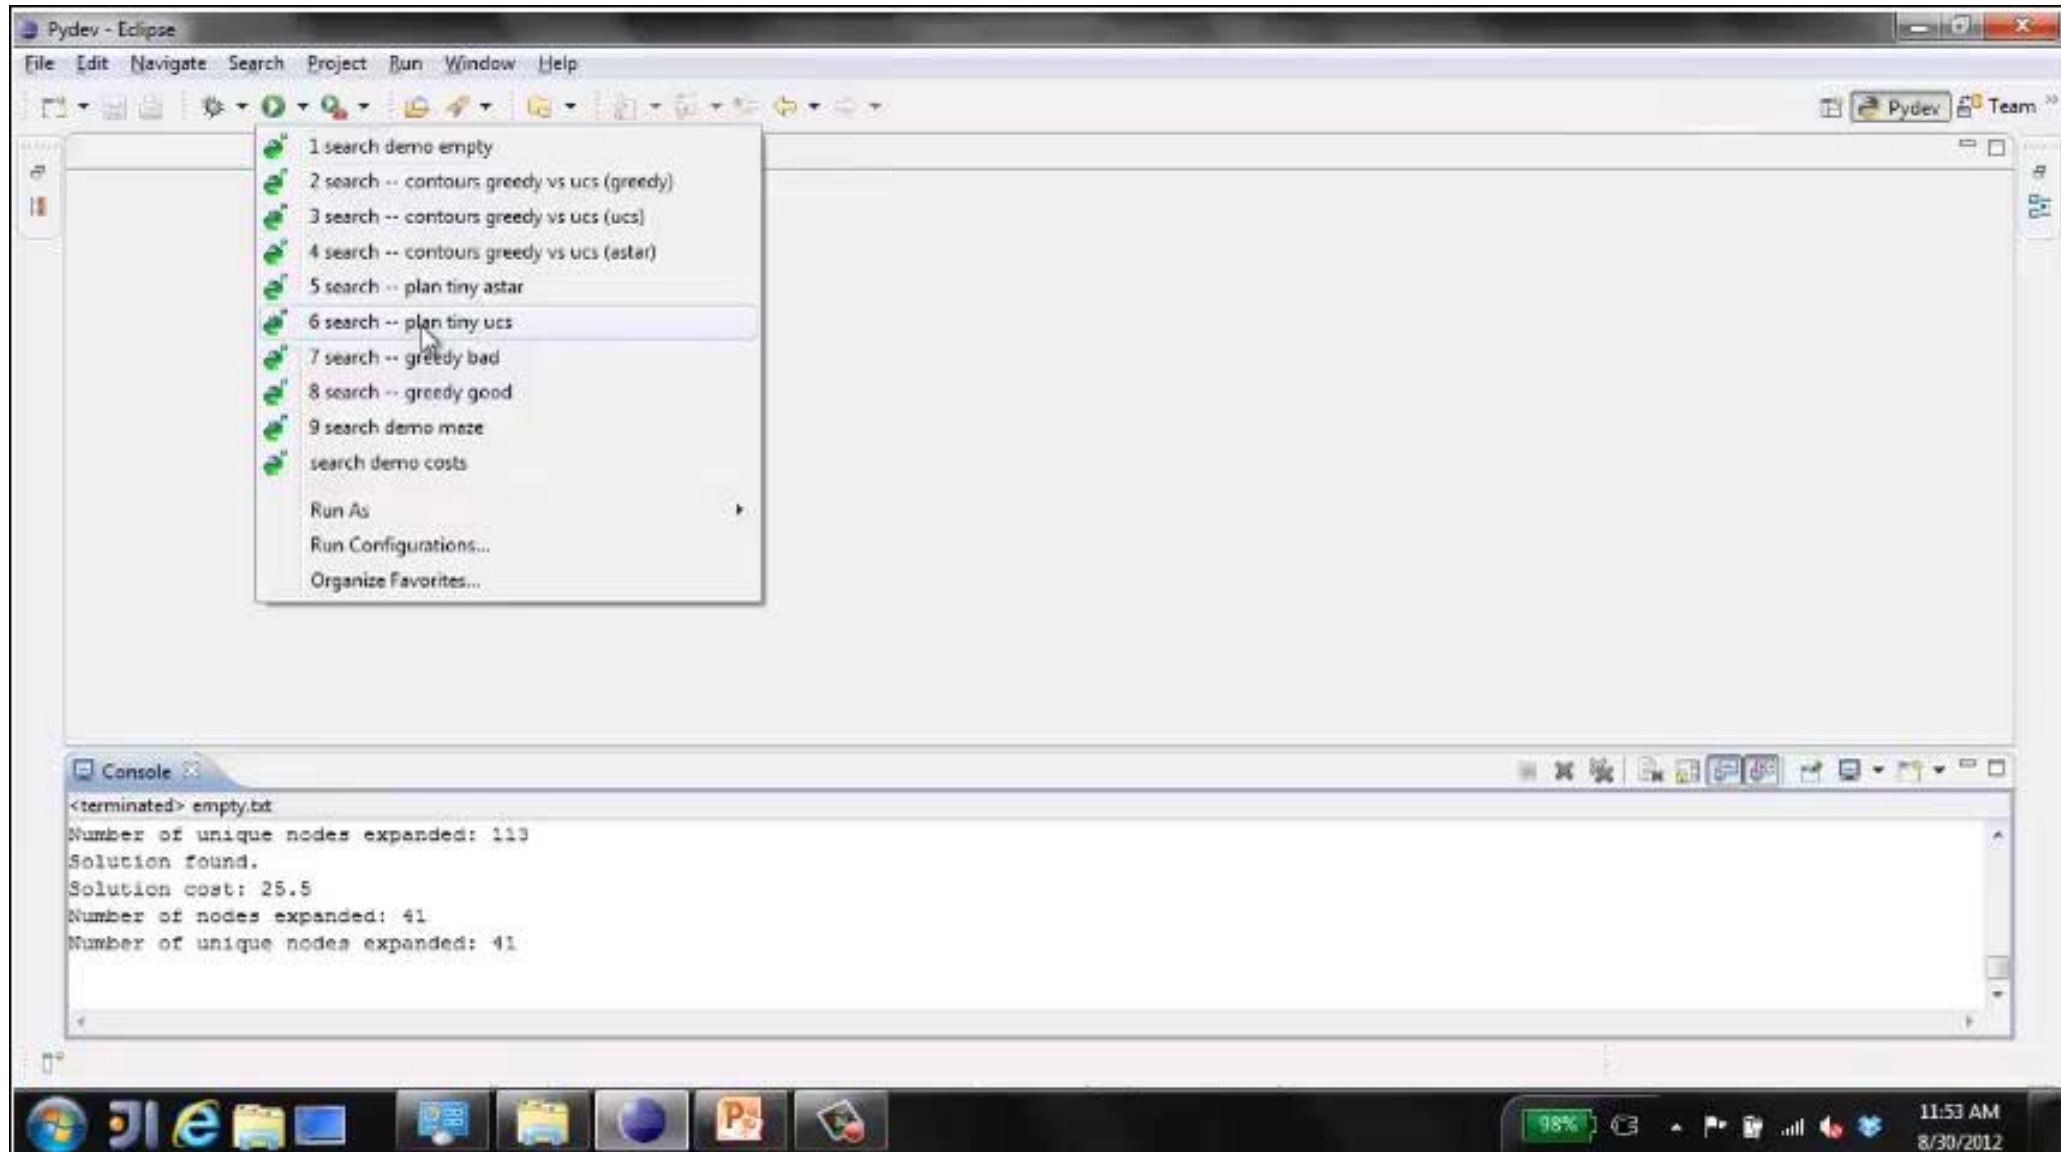

Video of Demo Empty Water Shallow/Deep – Guess Algorithm


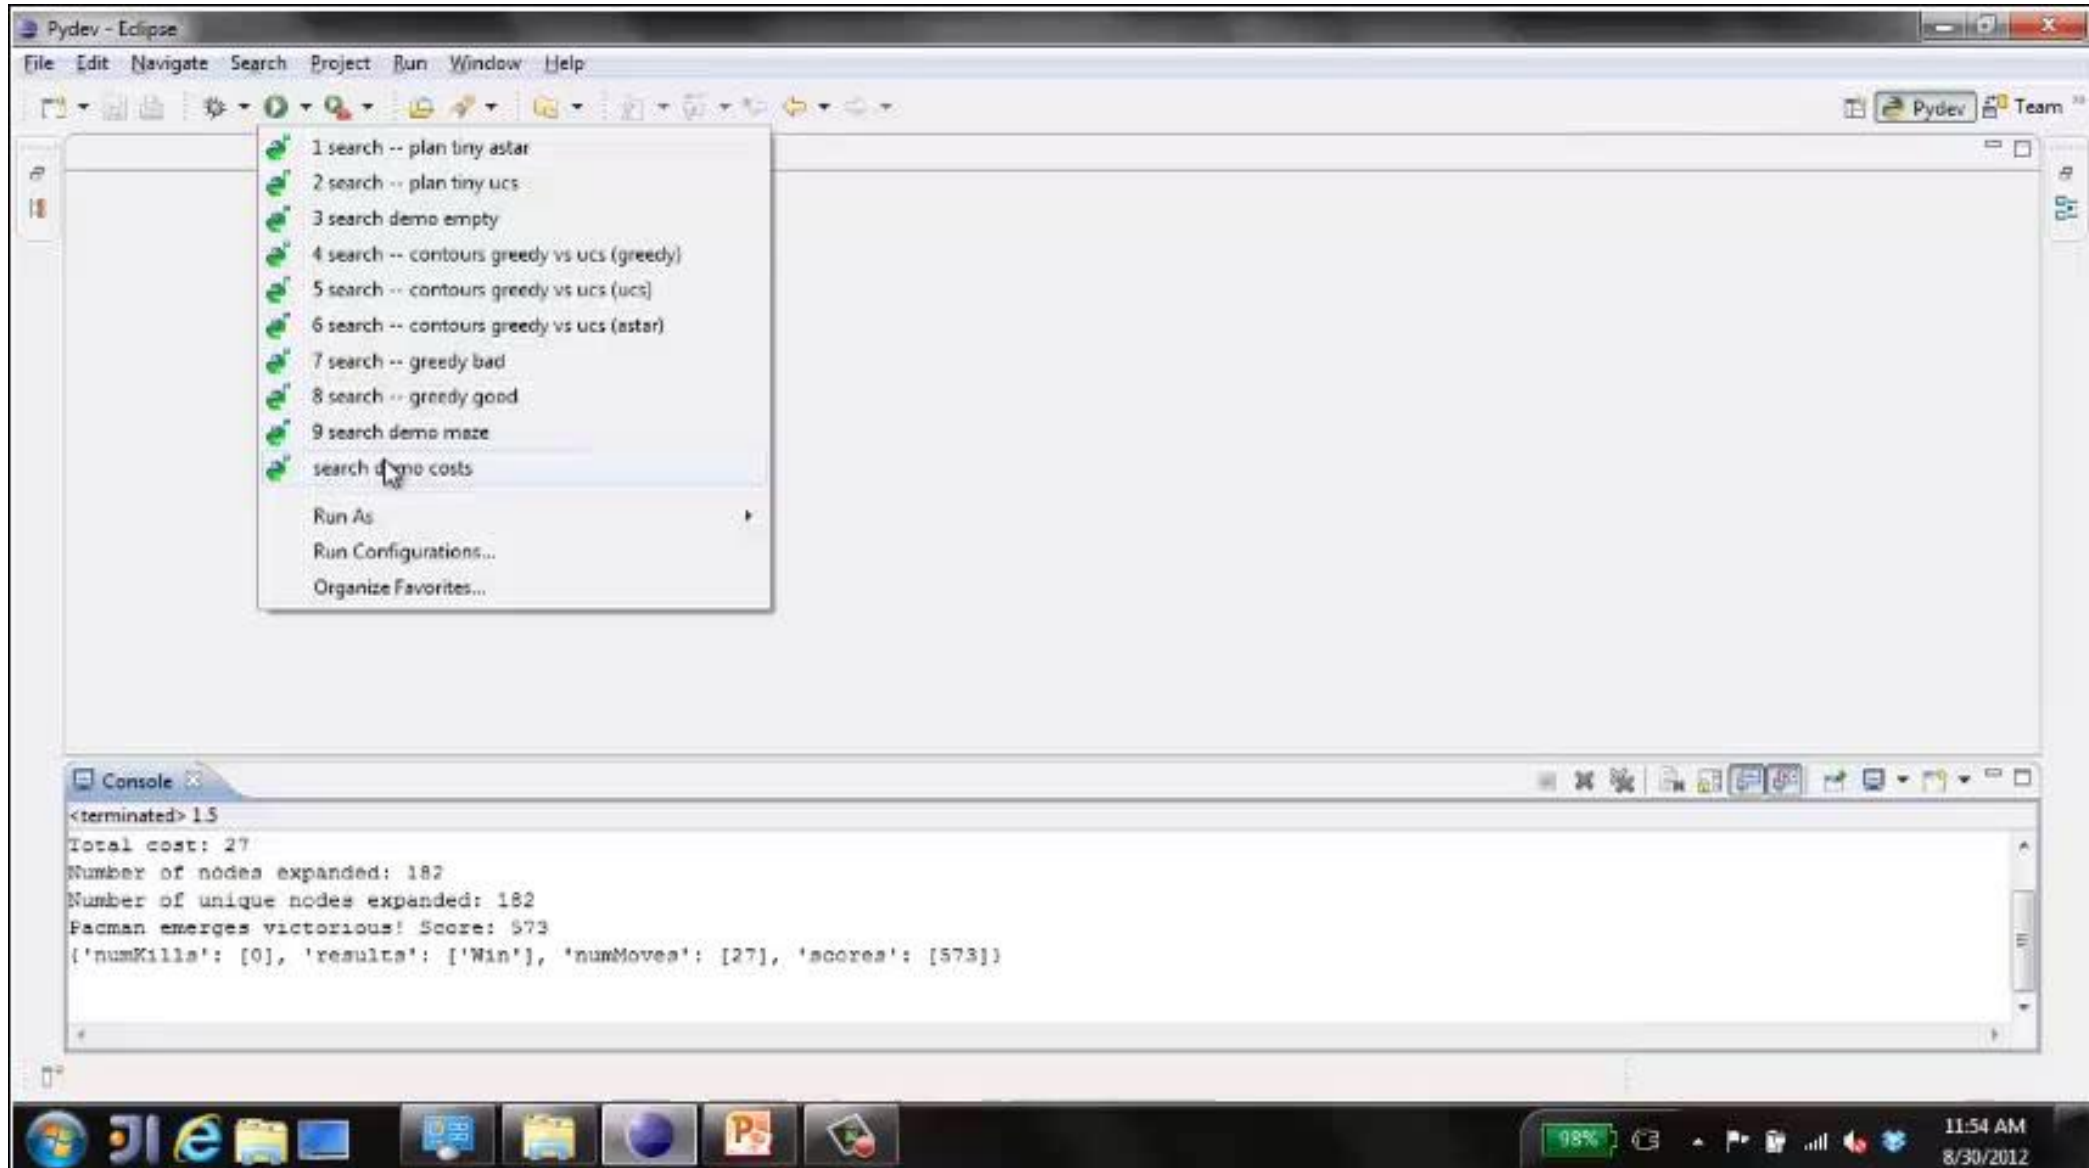


Creating Heuristics



Creating Admissible Heuristics

- Most of the work in solving hard search problems optimally is in coming up with admissible heuristics
- Often, admissible heuristics are solutions to *relaxed problems*, where new actions are available

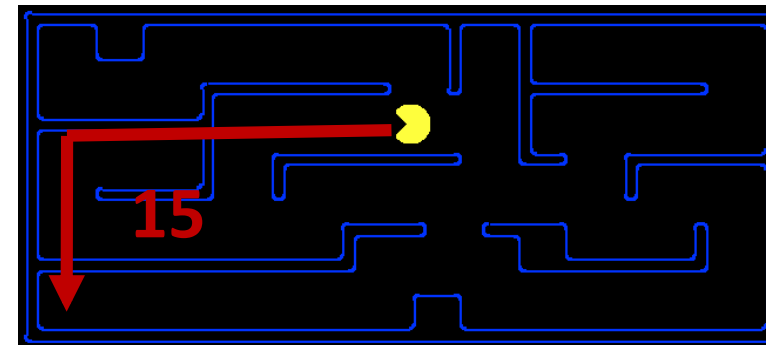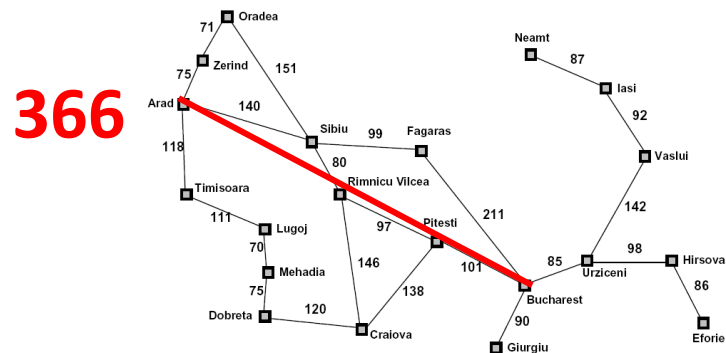


- Inadmissible heuristics are often useful too

Example: 8 Puzzle

7	2	4
5		6
8	3	1

Start State

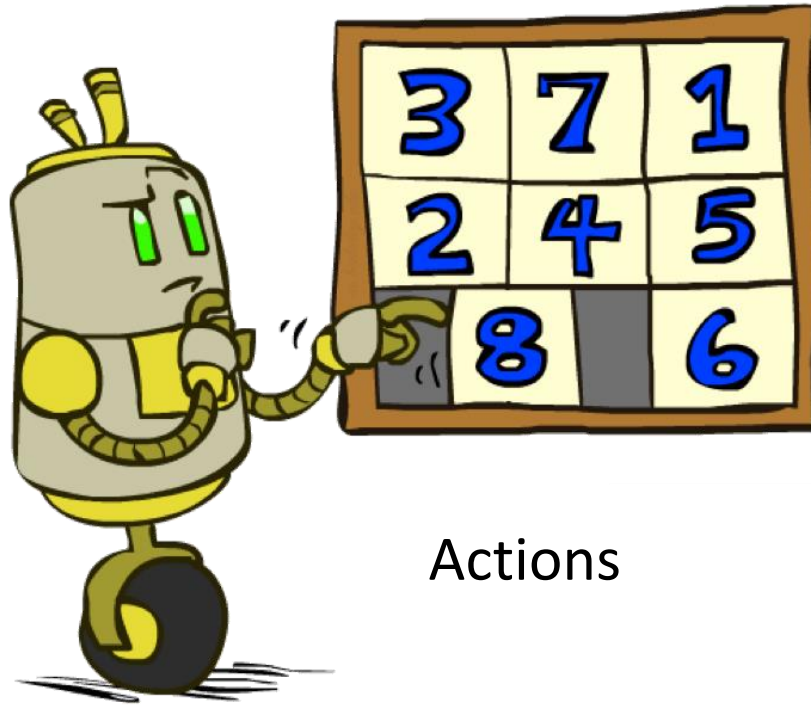

Actions


	1	2
3	4	5
6	7	8

Goal State


- What are the states?
- How many states?
- What are the actions?
- How many successors from the start state?
- What should the costs be?

8 Puzzle I


- Heuristic: Number of tiles misplaced
- Why is it admissible?
- $h(\text{start}) = 8$
- This is a *relaxed-problem* heuristic

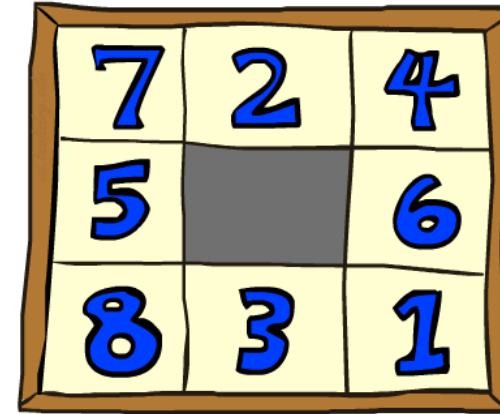

Start State

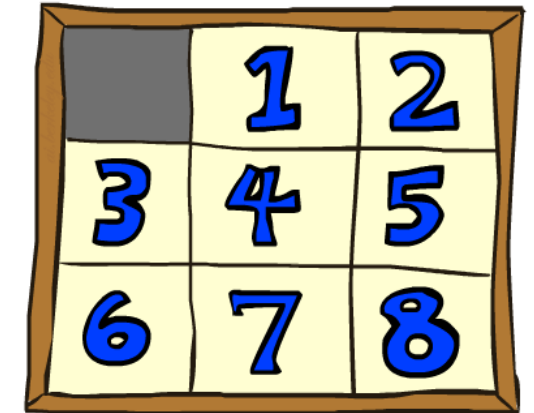

Goal State

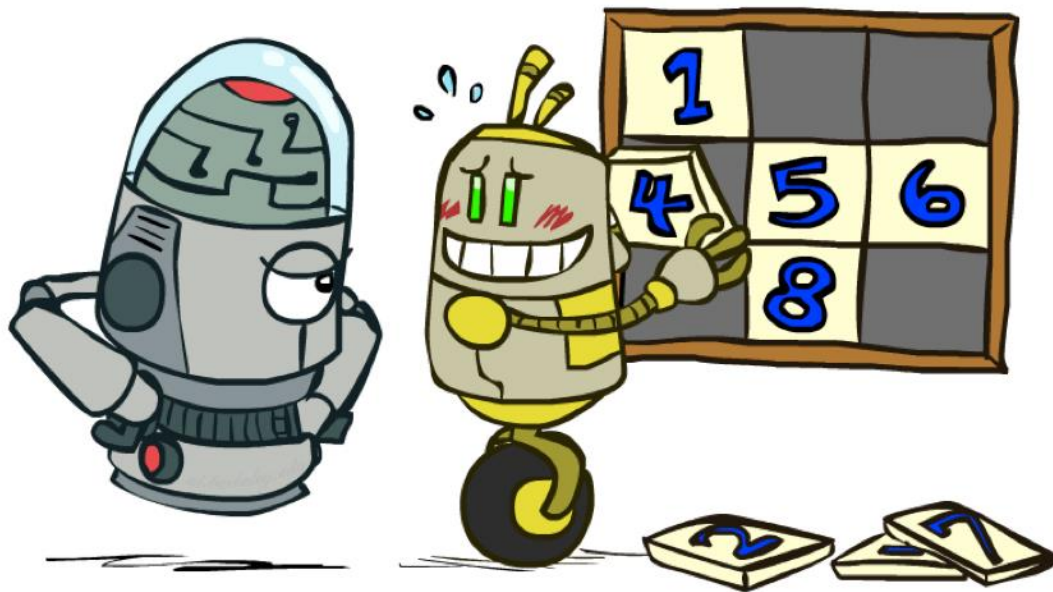


Average nodes expanded
when the optimal path has...


	...4 steps	...8 steps	...12 steps
UCS	112	6,300	3.6×10^6
TILES	13	39	227

8 Puzzle II

- What if we had an easier 8-puzzle where any tile could slide any direction at any time, ignoring other tiles?
- Total *Manhattan* distance
- Why is it admissible?
- $h(\text{start}) = 3 + 1 + 2 + \dots = 18$

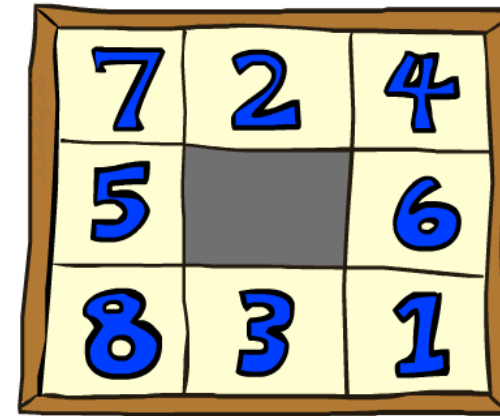

Start State


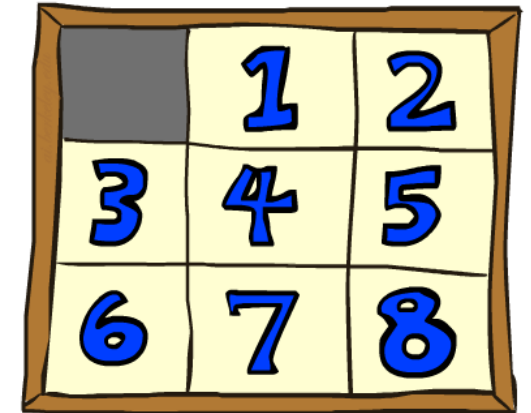


Goal State

Average nodes expanded when the optimal path has...			
	...4 steps	...8 steps	...12 steps
TILES	13	39	227
MANHATTAN	12	25	73

8 Puzzle III

- How about using the *actual cost* as a heuristic?
 - Would it be admissible?
 - Would we save on nodes expanded?
 - What's wrong with it?

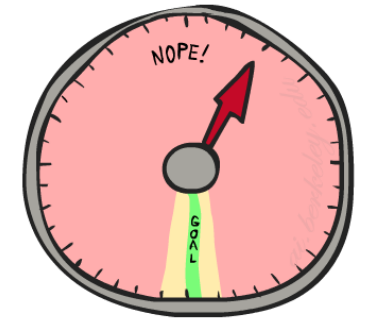

- With A^* : a trade-off between quality of estimate and work per node
 - As heuristics get closer to the true cost, you will expand fewer nodes but usually do more work per node to compute the heuristic itself

Semi-Lattice of Heuristics

Trivial Heuristics, Dominance

- Dominance: $h_a \geq h_c$ if

$$\forall n : h_a(n) \geq h_c(n)$$


- Heuristics form a semi-lattice:

- Max of admissible heuristics is admissible


$$h(n) = \max(h_a(n), h_b(n))$$

- Trivial heuristics

- Bottom of lattice is the zero heuristic (what does this give us?)
- Top of lattice is the exact heuristic


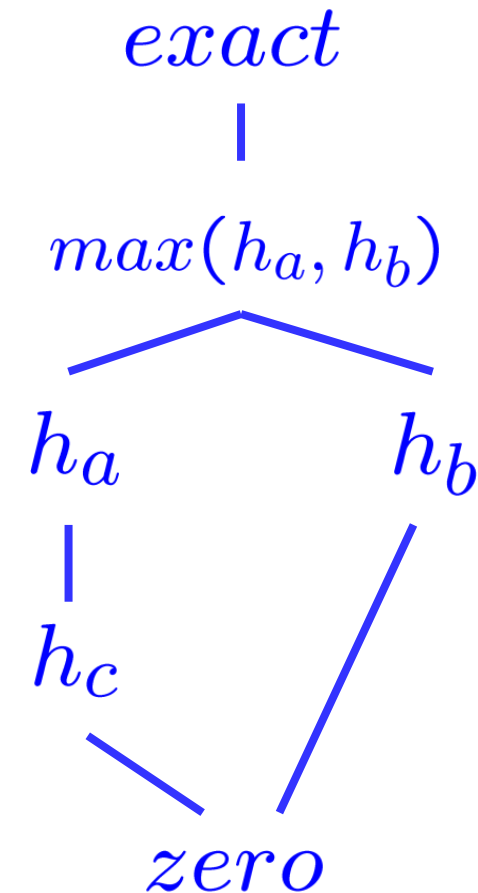


Graph Search

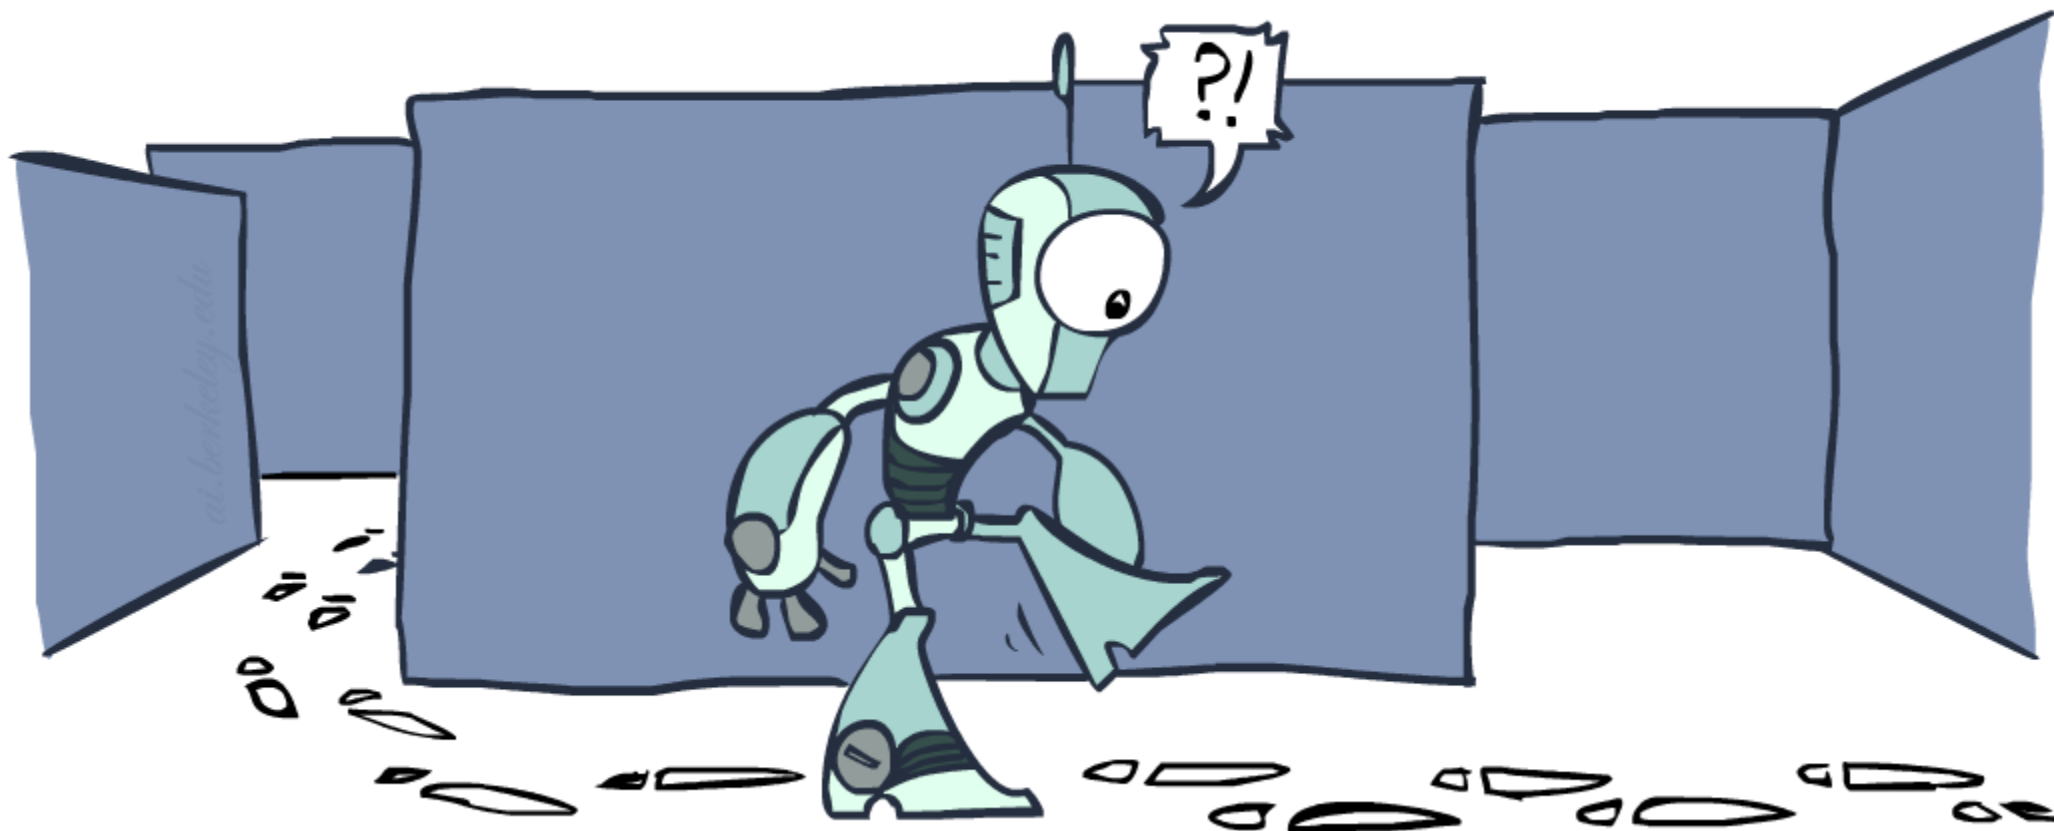


Tree Search: Extra Work!

- Failure to detect repeated states can cause exponentially more work.

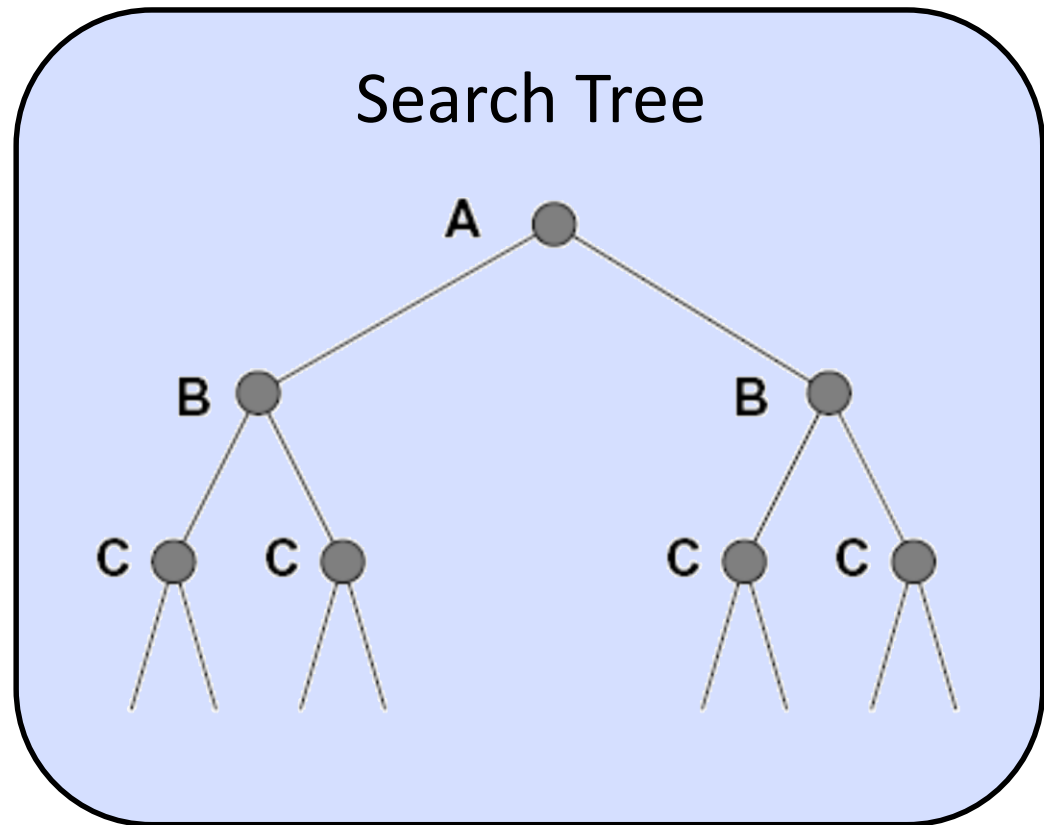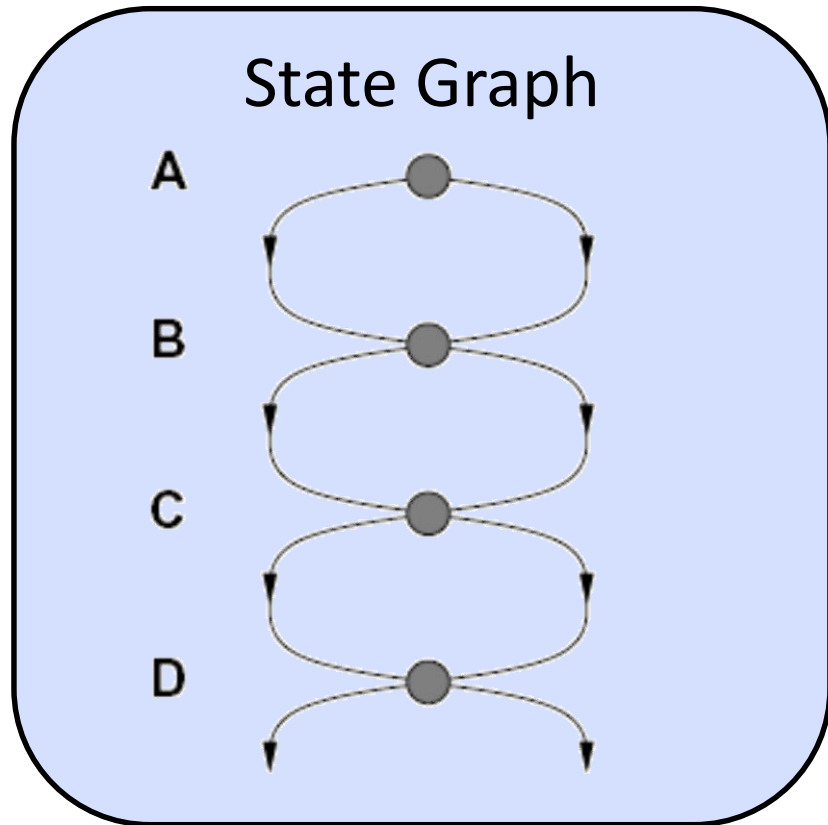

Graph Search

- In BFS, for example, we shouldn't bother expanding the circled nodes (why?)

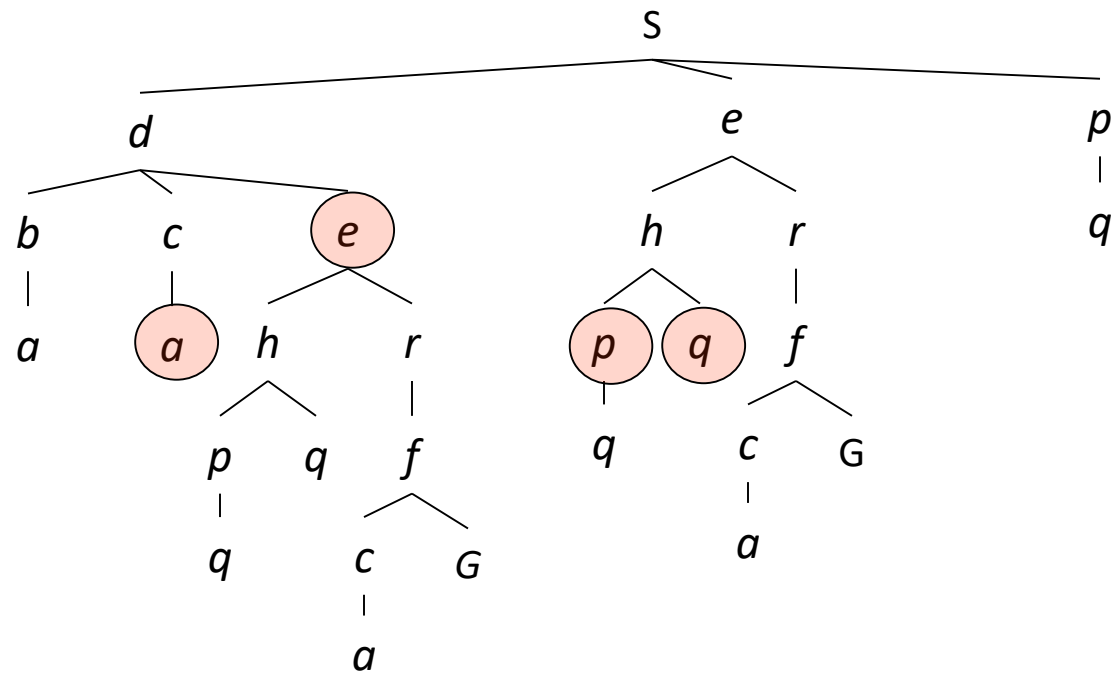


Graph Search


- Idea: never **expand** a state twice
- How to implement:
 - Tree search + set of expanded states (“reached set”)
 - Expand the search tree node-by-node, but...
 - Before expanding a node, check if the state is in the reached set
 - If in reached set, check the associated cost vs. the new cost
 - Expand if new cost is lower
 - Skip if new cost is higher
- Important: **store the reached set as a set of (state, cost) pairs**, not a list
- Can graph search wreck completeness? Why/why not?
- How about optimality?

Importance of tracking state cost in closed set


State space graph

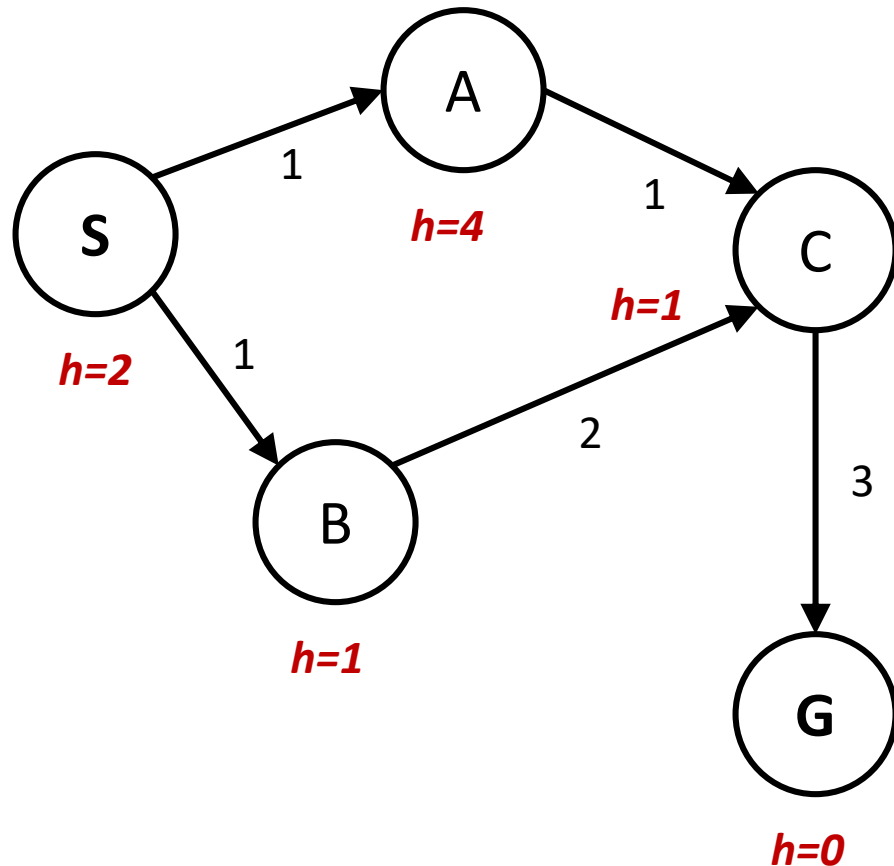

Search tree

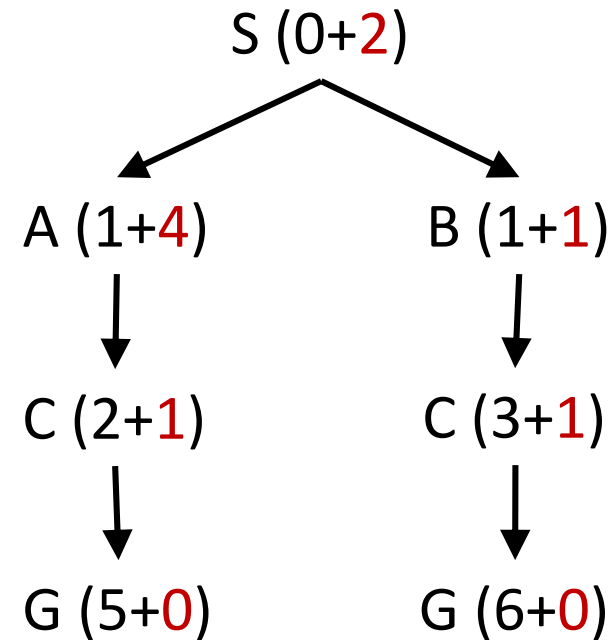

Optimality of A* Graph Search

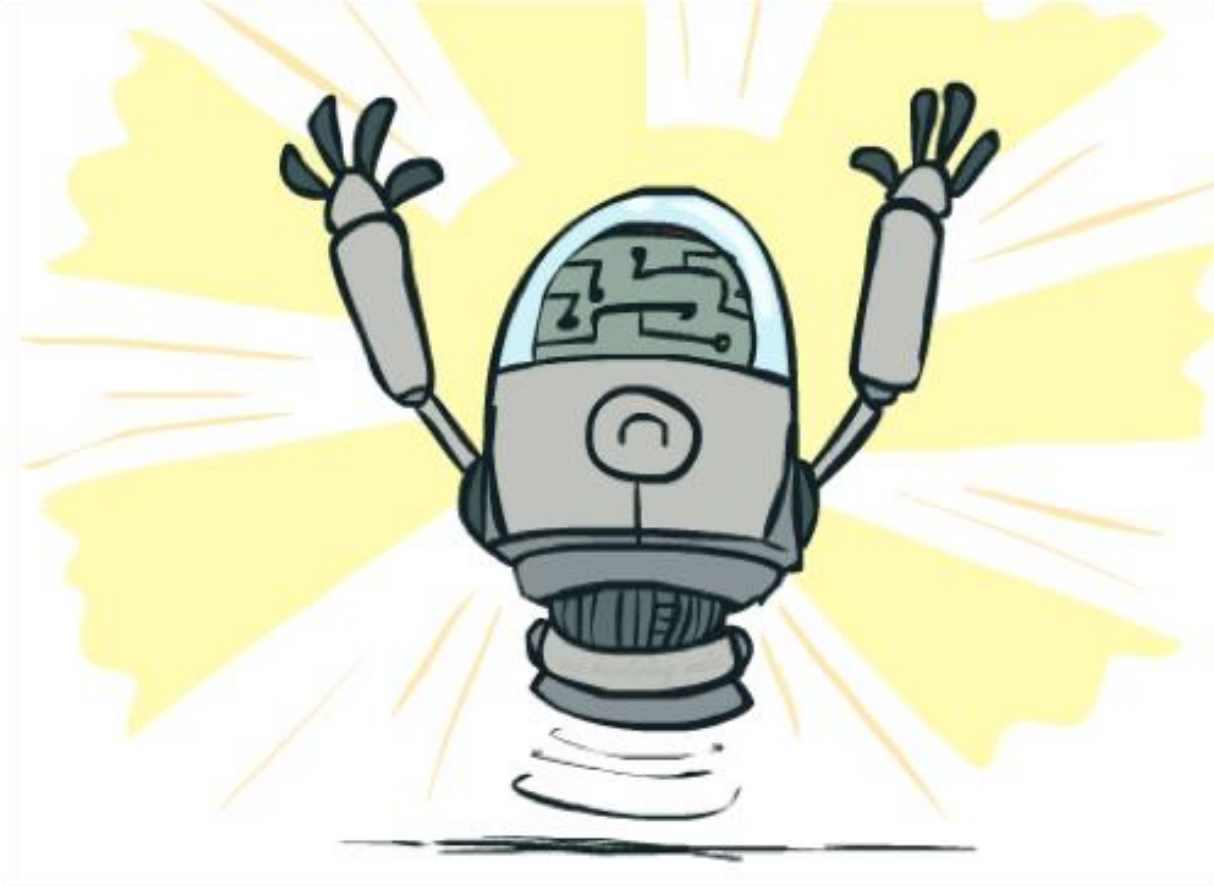


A*: Summary



A*: Summary

- A* uses both backward costs and (estimates of) forward costs
- A* is optimal with admissible heuristics
- Heuristic design is key: often use relaxed problems

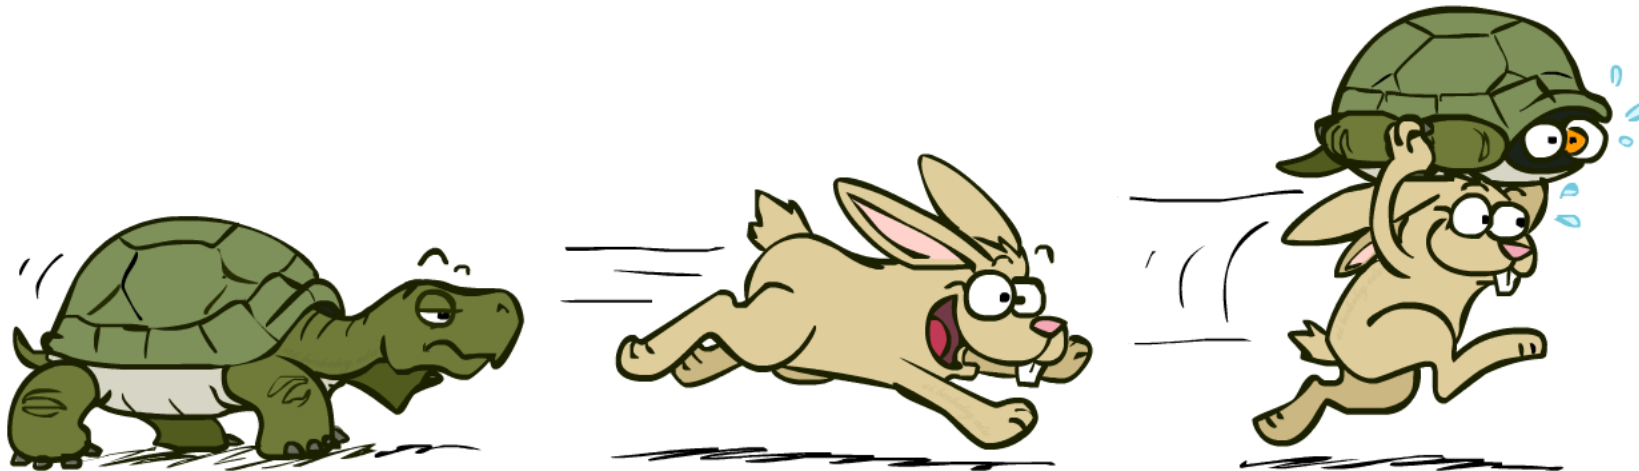

Tree Search Pseudo-Code


```
function TREE-SEARCH(problem, fringe) return a solution, or failure
  fringe ← INSERT(MAKE-NODE(INITIAL-STATE[problem]), fringe)
  loop do
    if fringe is empty then return failure
    node ← REMOVE-FRONT(fringe)
    if GOAL-TEST(problem, STATE[node]) then return node
    for child-node in EXPAND(STATE[node], problem) do
      fringe ← INSERT(child-node, fringe)
    end
  end
```

Graph Search Pseudo-Code

```
function A*-GRAPH-SEARCH(problem, frontier) return a solution or failure
reached ← an empty dict mapping nodes to the cost to each one
frontier ← INSERT((MAKE-NODE(INITIAL-STATE[problem]),0), frontier)
while not IS-EMPTY(frontier) do
    node, node.CostToNode ← POP(frontier)
    if problem.IS-GOAL(node.STATE) then return node
    end if
    if node.STATE is not in reached or reached[node.STATE] > node.CostToNode then
        reached[node.STATE] = node.CostToNode
        for each child-node in EXPAND(problem, node) do
            frontier ← INSERT((child-node, child-node.COST + CostToNode), frontier)
        end for
    end if
end while

return failure
```


Consistency of Heuristics*

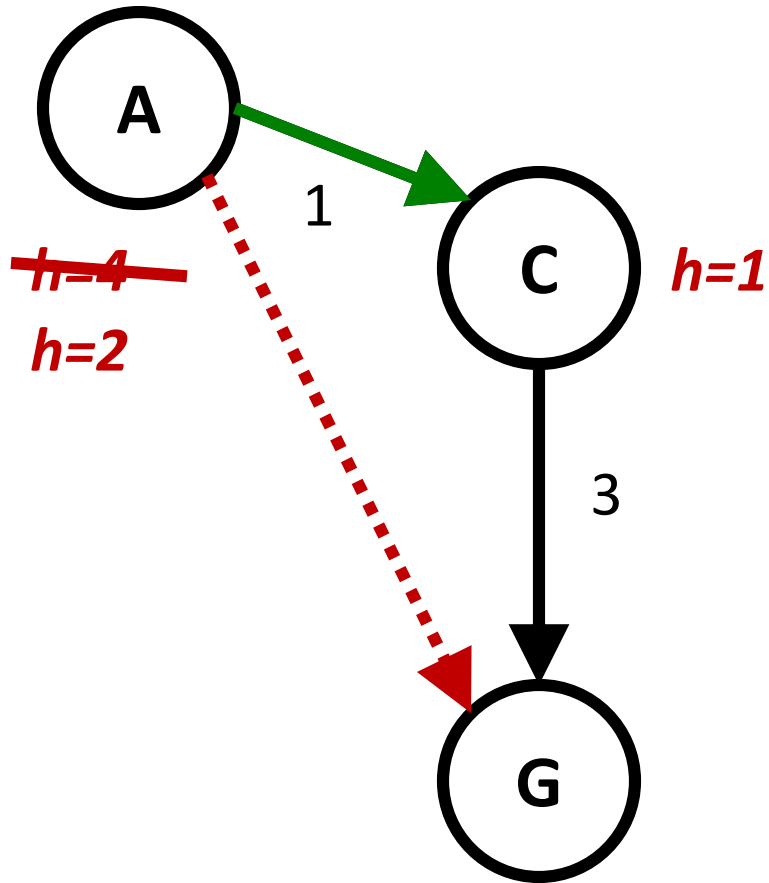

- Main idea: estimated heuristic costs \leq actual costs
 - Admissibility: heuristic cost \leq actual cost to goal
$$h(A) \leq \text{actual cost from A to G}$$
 - Consistency: heuristic “arc” cost \leq actual cost for each arc
$$h(A) - h(C) \leq \text{cost}(A \text{ to } C)$$
- Consequences of consistency:
 - The f value along a path never decreases
$$h(A) \leq \text{cost}(A \text{ to } C) + h(C)$$
$$f(A) = g(A) + h(A) \leq g(A) + \text{cost}(A \text{ to } C) + h(C) = f(C)$$
- A* graph search is optimal

Only Single State Expansion Needed with Consistent Heuristic*


- Sketch: consider what A^* does with a consistent heuristic:
 - Fact 1: In tree search, A^* expands nodes in increasing total f value (f -contours)
 - Fact 2: For every state s , nodes that reach s optimally are expanded before nodes that reach s suboptimally
 - Result: A^* graph search is optimal

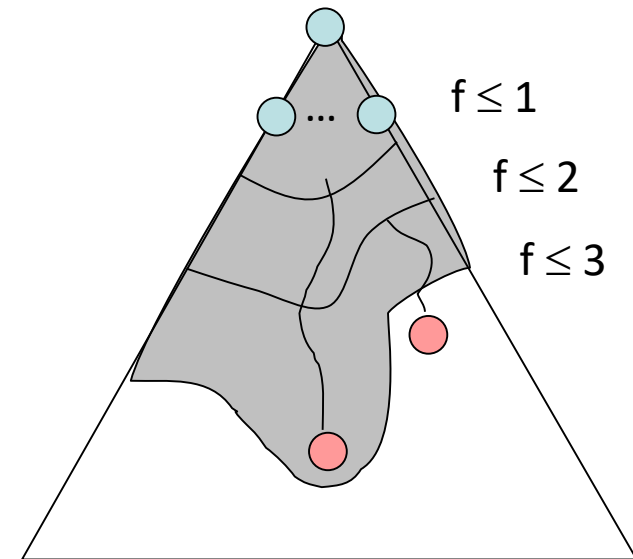

First Time State Expansion is Cheapest with Consistent Heuristic*

- Consider what A* does:
 - Expands nodes in increasing total f value (f-contours)
Reminder: $f(n) = g(n) + h(n) = \text{cost to } n + \text{heuristic}$
 - Proof idea: the optimal goal(s) have the lowest f value, so it must get expanded first

There's a problem with this argument. What are we assuming is true?

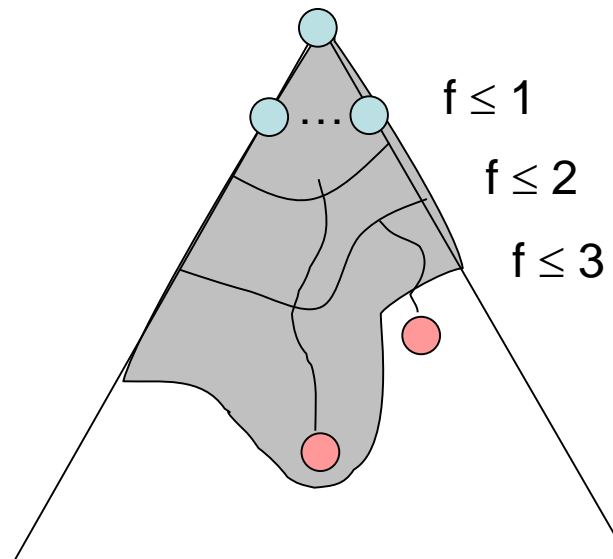

First Time State Expansion is Cheapest with Consistent Heuristic*

Proof:

- New possible problem: some n on path to G^* isn't in queue when we need it, because some worse n' for the same state dequeued and expanded first (disaster!)
- Take the highest such n in tree
- Let p be the ancestor of n that was on the queue when n' was popped
- $f(p) < f(n)$ because of **consistency**
- $f(n) < f(n')$ because n' is suboptimal
- p would have been expanded before n'
- Contradiction!

