Search

Lecture Attendance: http://bit.ly/3GEMoKZ

State space graph.

- Given a task, model of world appropriate to task.

Search Tree.

- Representation of all plans
  (also paths through state space graph.)

Uninformed Search.

- Depth First Search.
  - Good space bound, “leftmost” exploration seems bad.
- Breadth First Search.
  - Bad space bound, finds plan with fewest number of actions.
- Uniform Cost Search.
  - Bad space bounds, finds optimal plan.

Demo: L3D1

Informed Search

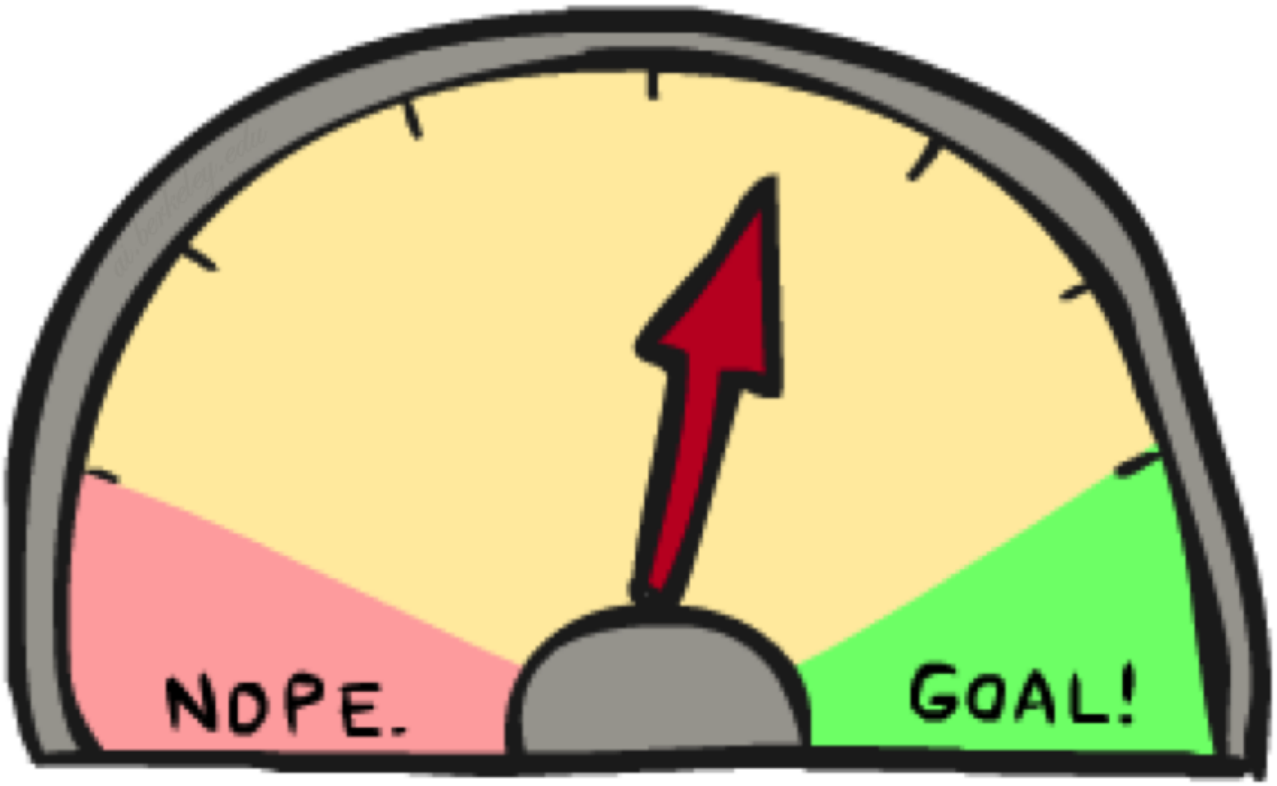

Search Heuristics

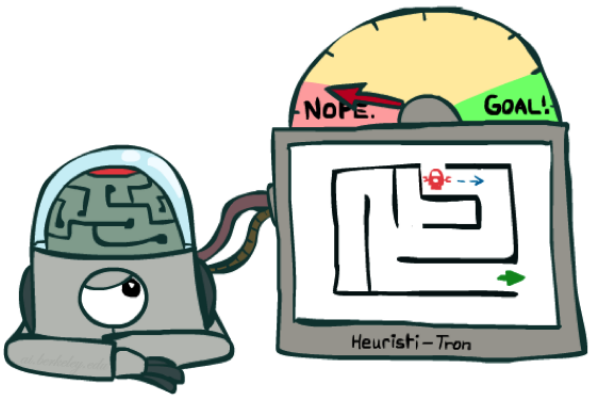

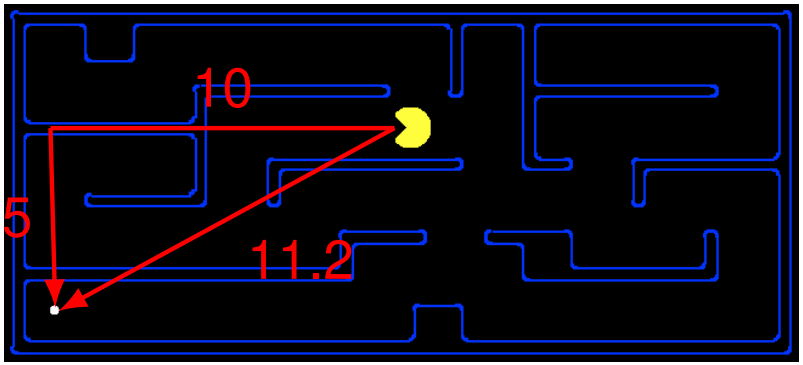

A heuristic is:

- A function that *estimates* how close a state is to a goal
- Designed for a particular search problem
- Examples: Euclidean distance for pathing. Manhattan distance.

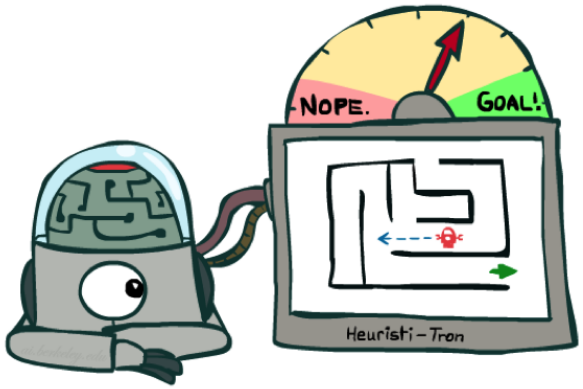

Example: Heuristic Function

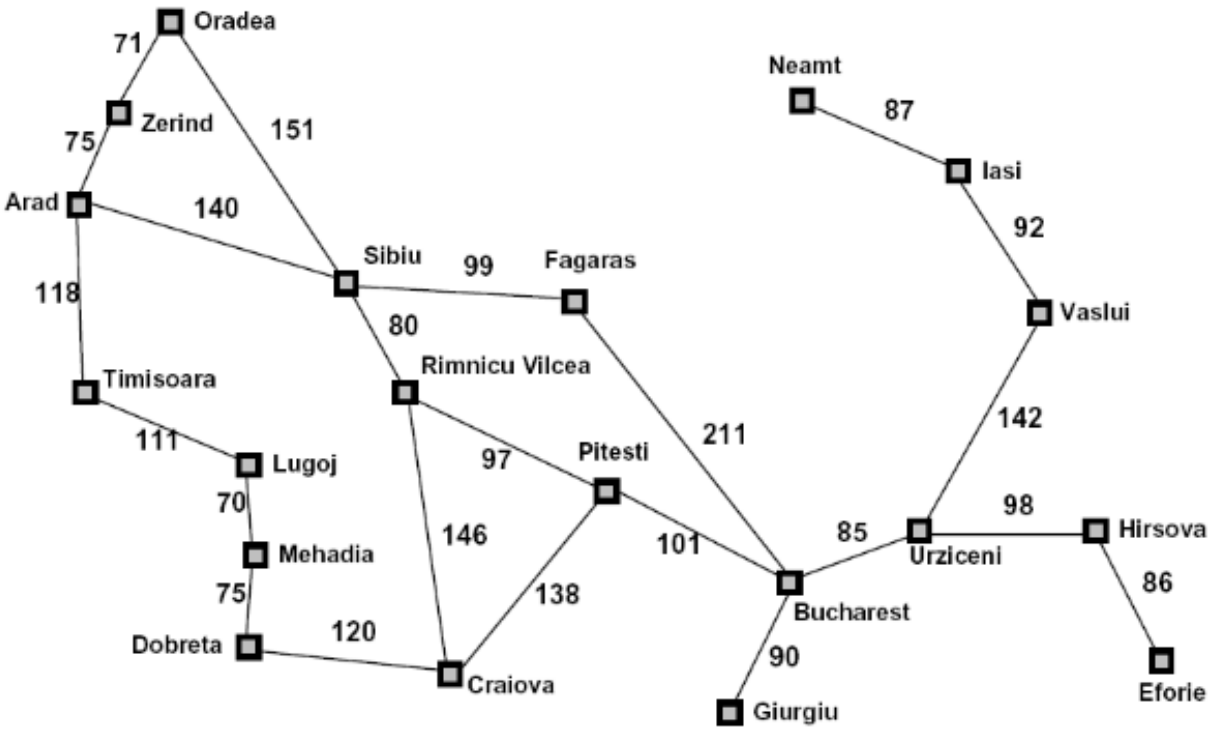

Straight–line distance to Bucharest	
Arad	366
Bucharest	0
Craiova	160
Dobreta	242
Eforie	161
Fagaras	178
Giurgiu	77
Hirsova	151
Iasi	226
Lugoj	244
Mehadia	241
Neamt	234
Oradea	380
Pitesti	98
Rimnicu Vilcea	193
Sibiu	253
Timisoara	329
Urziceni	80
Vaslui	199
Zerind	374

Example: Heuristic Function

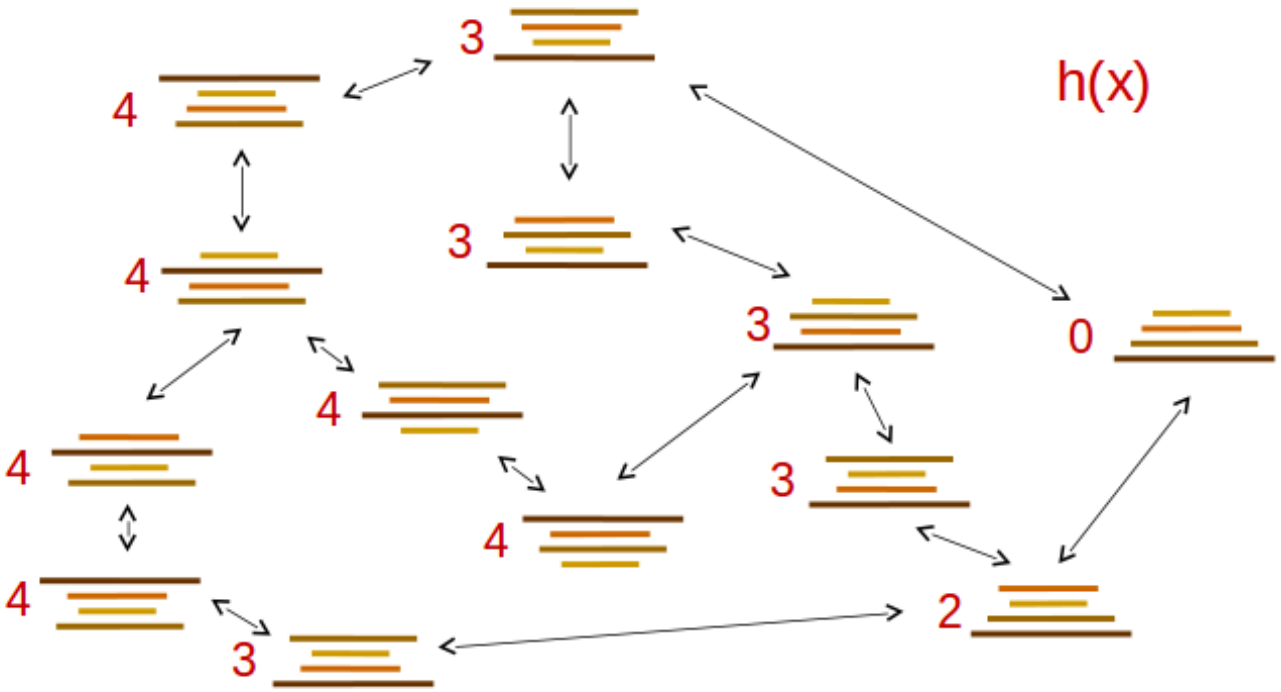

Heuristic: the number of the largest pancake that is still out of place

Greedy Search

Greedy Search

Expand the node that seems closest to the goal?

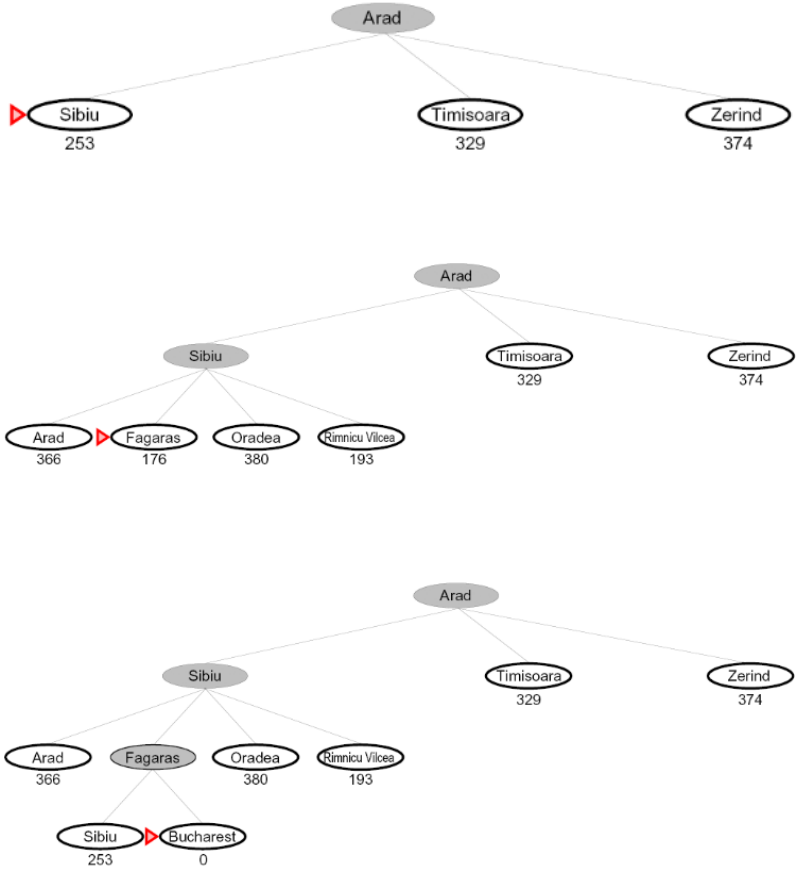

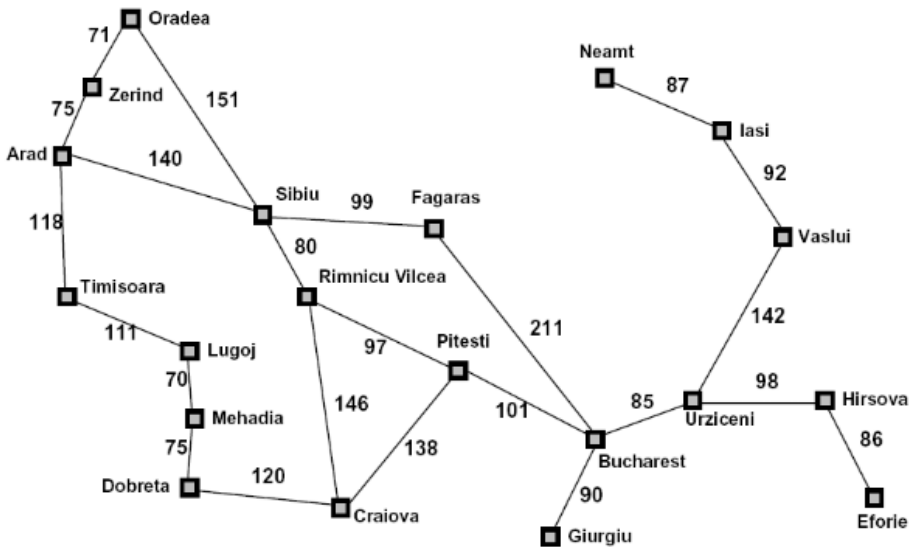

What can go wrong?

Greedy: 140 + 99 + 211 = 450

Better: 140+80+97+101 = 418

Greedy Search

Strategy: expand a node that (you think) is closest to a goal state.
Heuristic: estimate of distance to nearest goal for each state

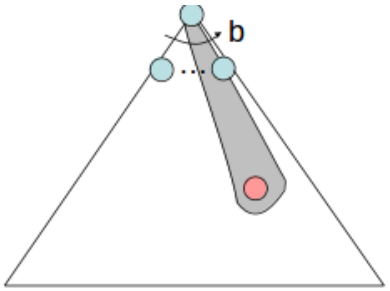

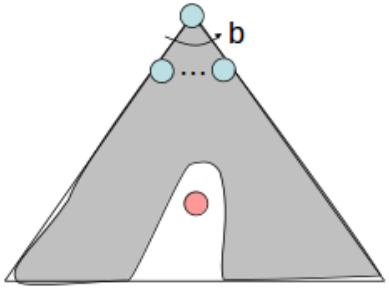

Wildest dream:
Perfect heuristic. A common case:
Best-first takes you straight to the (wrong) goal
Worst-case:
Like a badly-guided DFS

[Democontours greedy empty (L3D3)]
[Demo: contours greedy pacman small maze (L3D4)]

Video of Demo Contours Greedy (Empty)

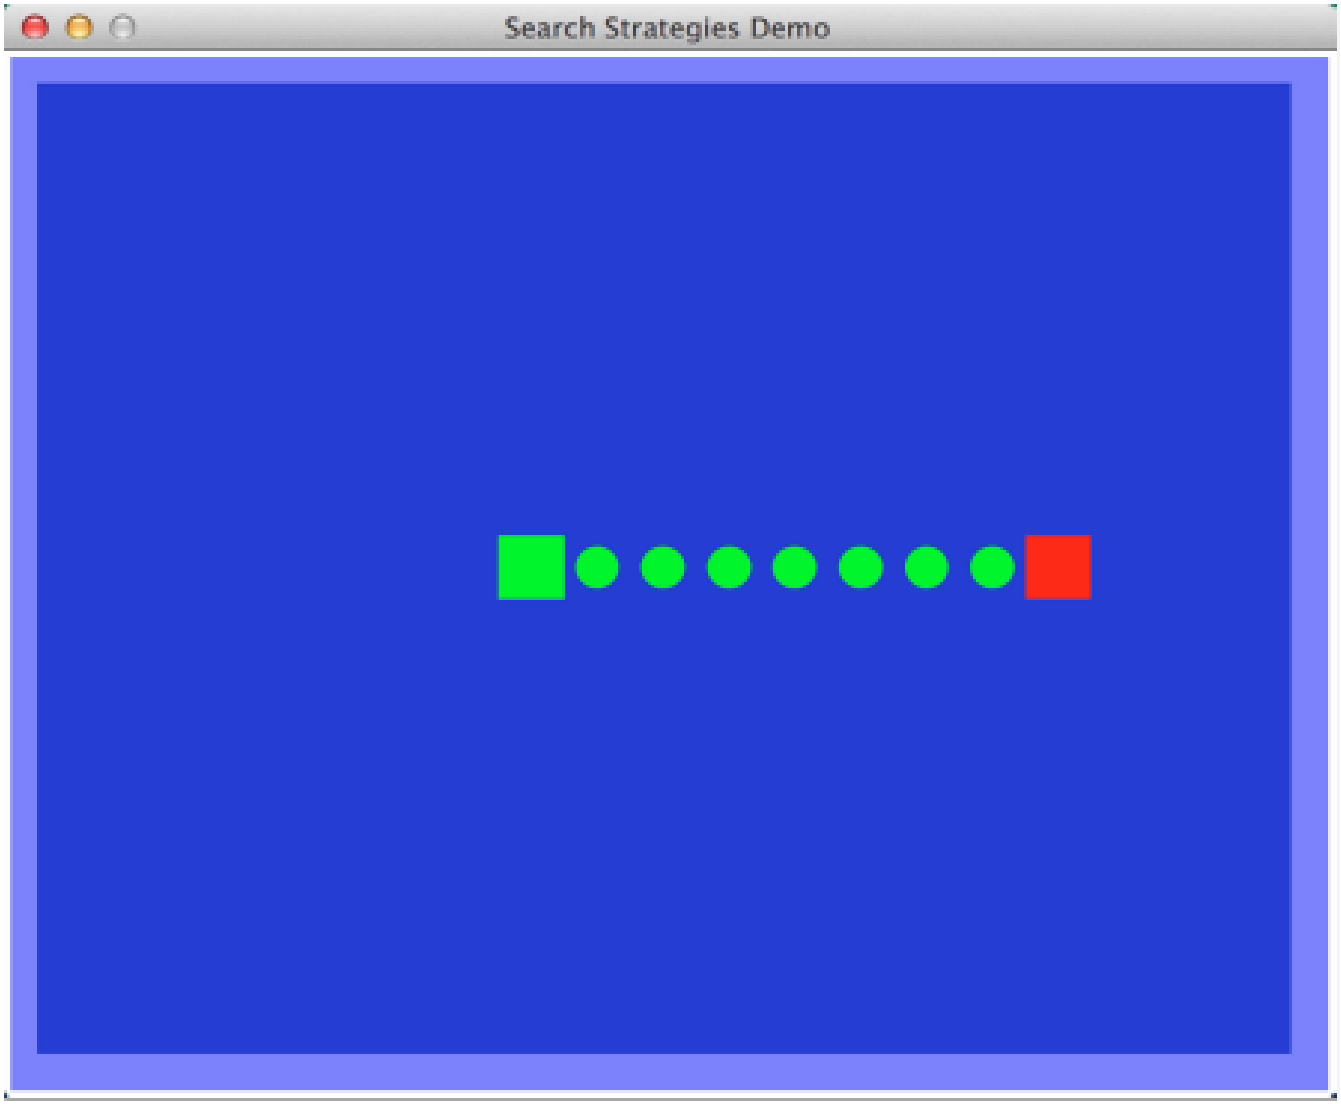

Video of Demo Contours Greedy (pacman/small)

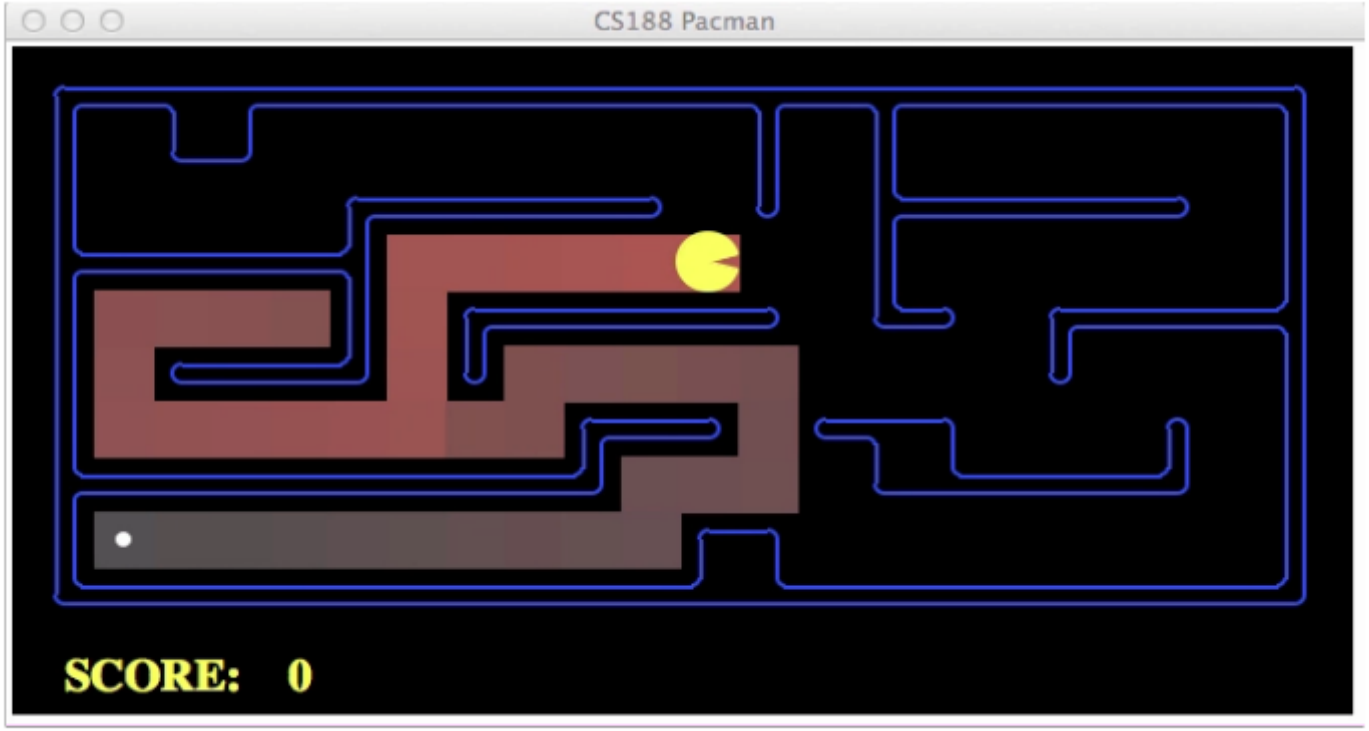

A* Search

A* Search

UCS

Greedy

A*

Combining UCS and Greedy

Uniform-cost orders by path cost, or backward cost: $g(n)$.
Greedy orders by goal proximity, or forward cost: $h(n)$.
A* Search orders by the sum: $f(n) = g(n) + h(n)$.

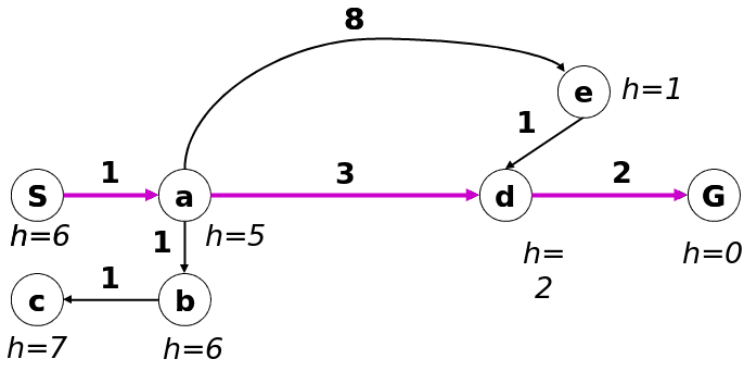

Blue $g(n)$, Red $h(n)$.

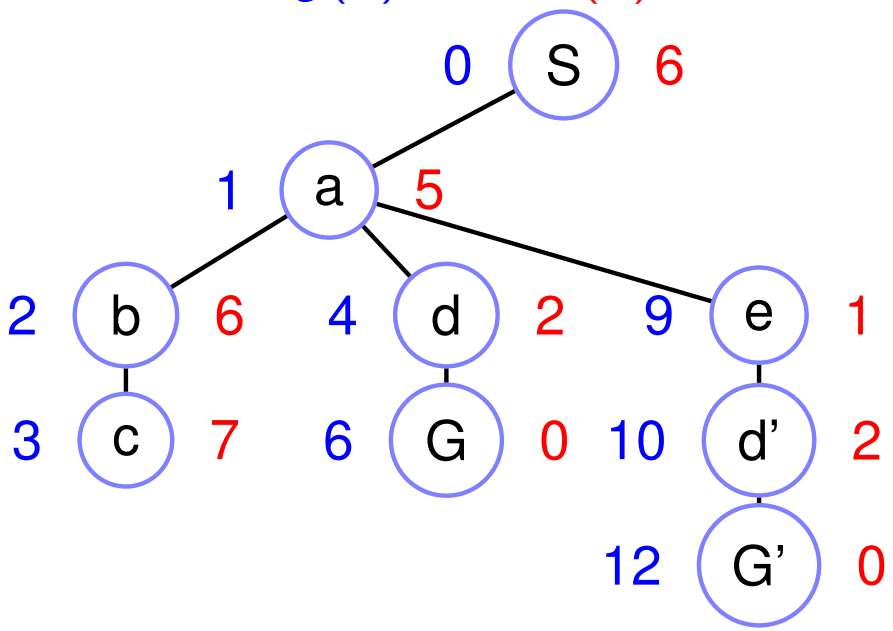

Uniform Cost Search. 

Greedy 

Astar. 

When should A* terminate?

Should we stop when we enqueue a goal?

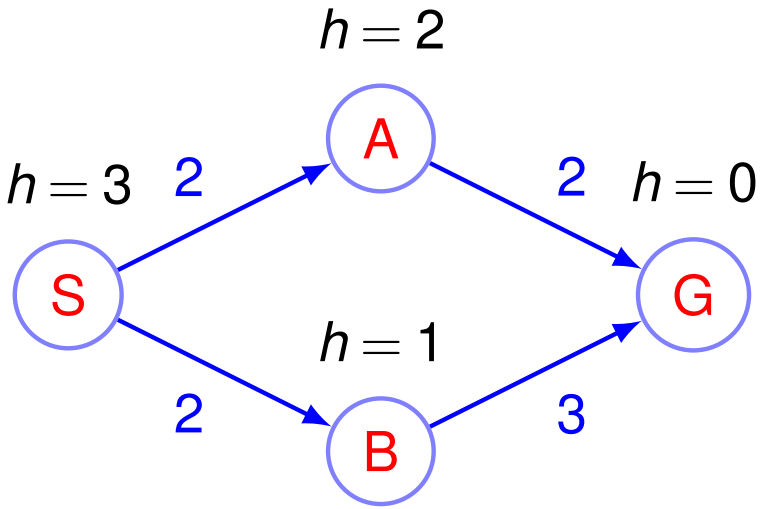

G in queue when B expanded.
No: only stop when we dequeue a goal.

Is A* Optimal?

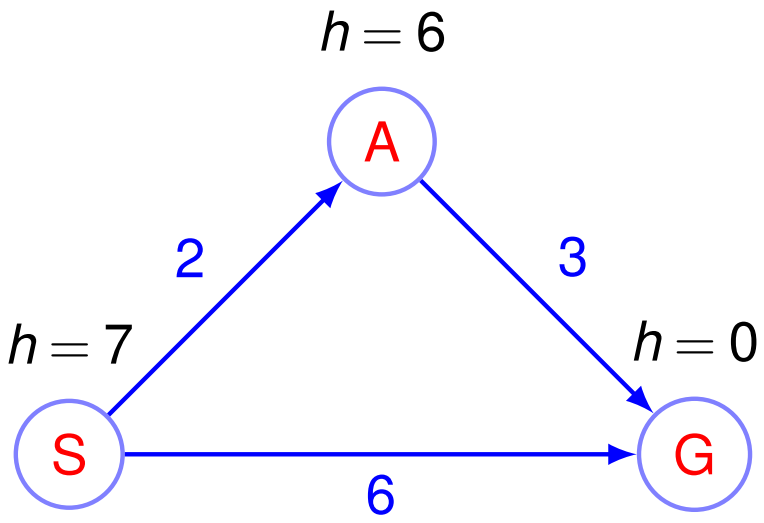

What goes wrong?

Actual goal cost $<$ estimated goal cost

We need estimates to be less than actual costs!
Lower bounds for actual costs.

Admissible Heuristics

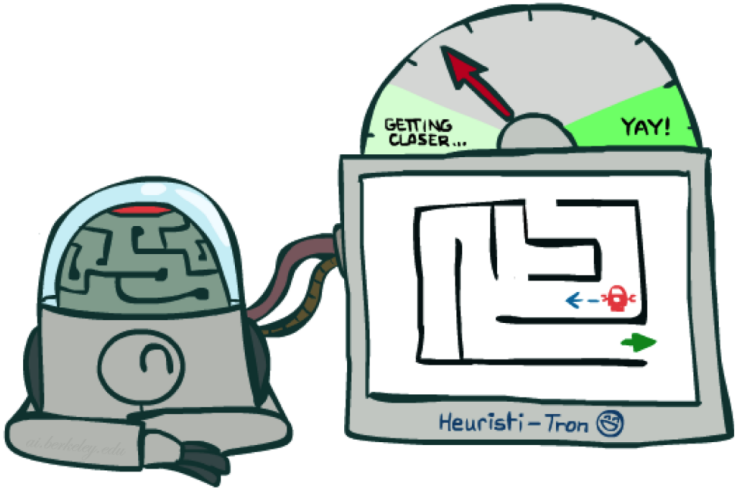

Idea: Admissibility

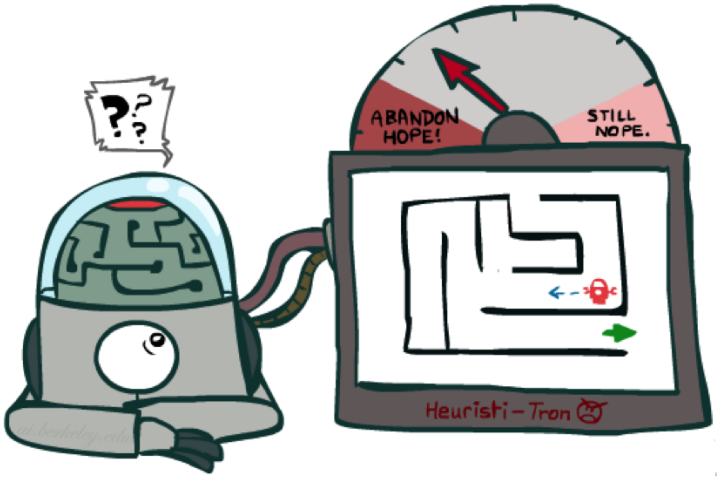

Inadmissible (pessimistic) heuristics break optimality by trapping good plans on the fringe

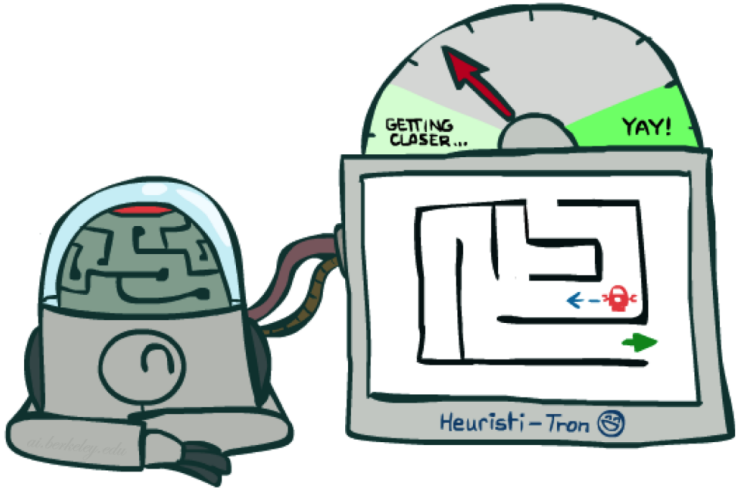

Admissible (optimistic) heuristics slow down bad plans but never outweigh true costs

Admissible Heuristics

A heuristic h is admissible (optimistic) if:

$$0 \leq h(n) \leq h^*(n)$$

where $h^*(n)$ is the true cost to a nearest goal Note: Coming up with admissible heuristics is most of what's involved in using A* in practice.

Examples:



Optimize: number of flips.

Largest out of place pancake.
Admissible?
No. For number of flips.
Yes. For height of stack.

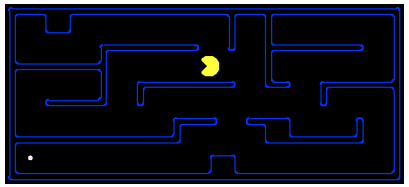

Manhattan distance.

Admissible? Yes!

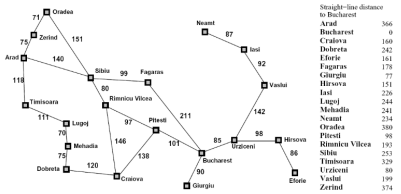

Euclidean Distance.

Admissible? Yes.

Optimality of A* Tree Search

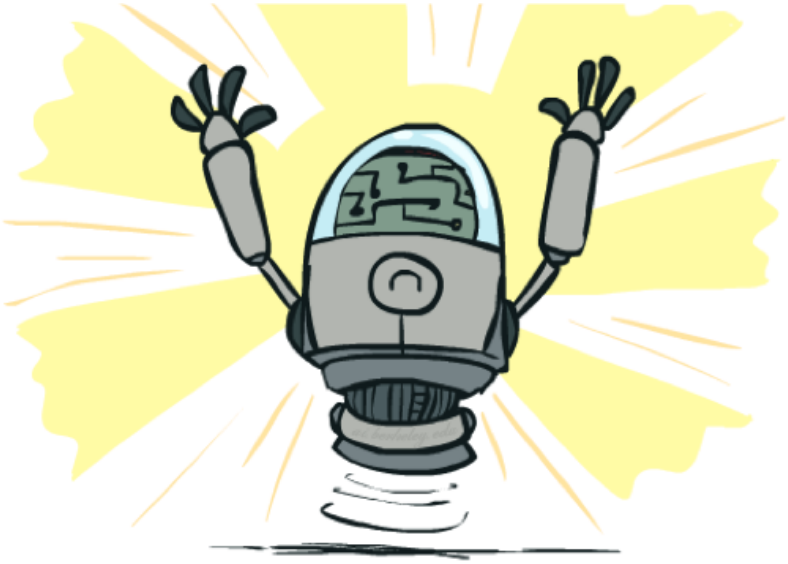

Optimality of A* Tree Search: Blocking

Claim: Goal A is expanded before B with $g(B) > g(A)$.

Proof:

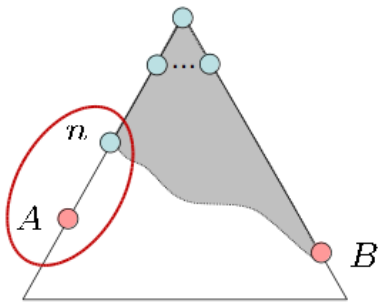

Definition of f-cost: $g(n) + h(n)$.
Admissibility of $h(n) \leq h^*(n)$
$\implies$ h = 0 at a goal
Imagine B is on the fringe.

Some ancestor n of A is on the fringe, too (maybe A!)

Claim: n will be expanded before B
f(n) is less or equal to f(A)
since $f(n) = g(n) + h(n) < f(A)$,
f(A) is less than f(B)
since $g(A) + 0 < g(B) + h(B)$

All ancestors of A expand before B.

A expands before B. $\rightarrow$ A* search is optimal.

Properties of A*

UCS

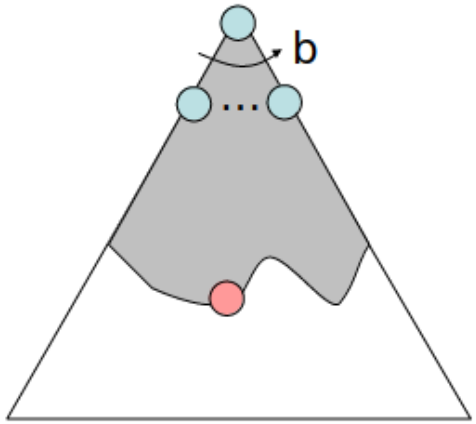

A*

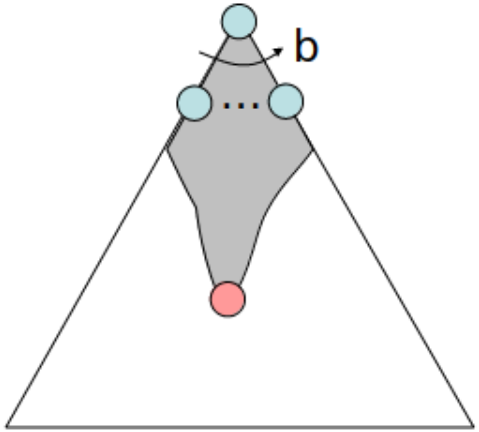

UCS vs A* Contours

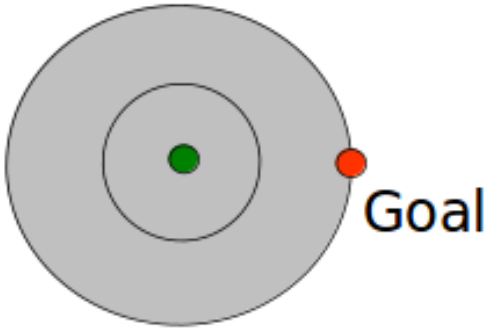

Uniform-cost expands equally in all "directions".

A* expands mainly toward the goal, but does hedge its bets to ensure optimality



[Demo: contours UCS / greedy / A* empty (L3D1)]
[Demo: contours A* pacmansmall maze (L3D5)]

Video of Demo Contours (Empty) – UCS

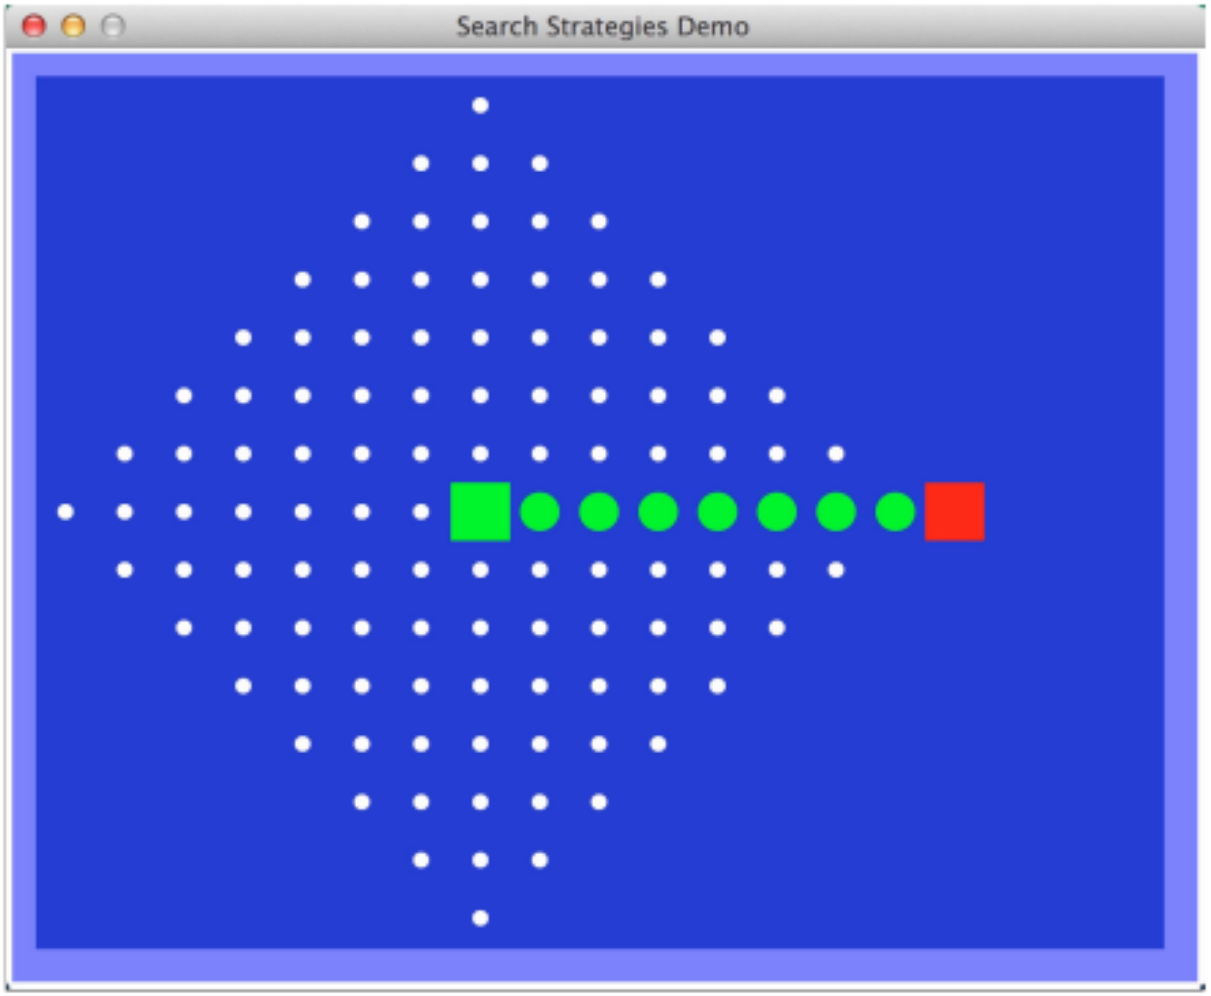

Video of Demo Contours (Empty) – Greedy

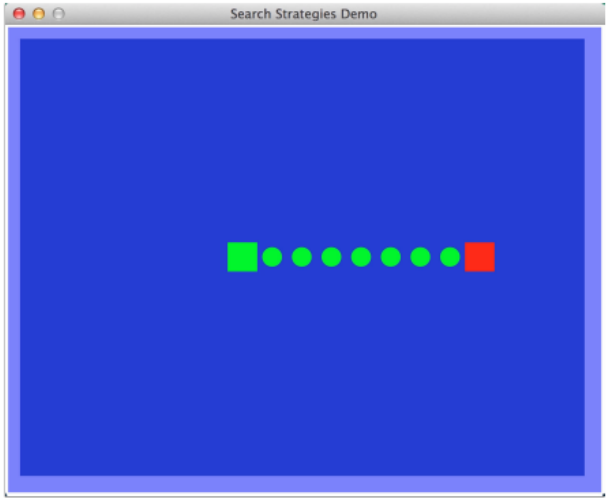

Video of Demo Contours (Empty) – A*

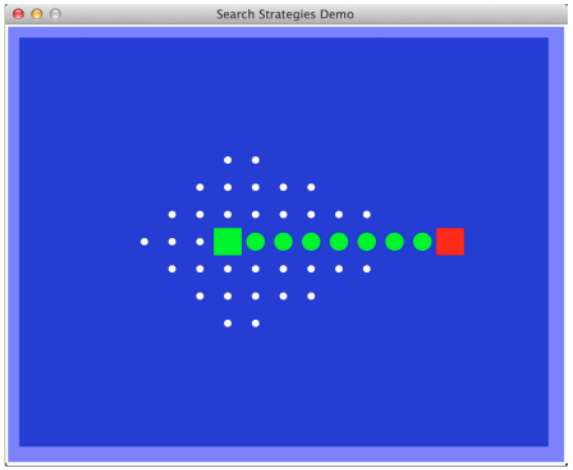

Video of Demo Contours: Pacman A*

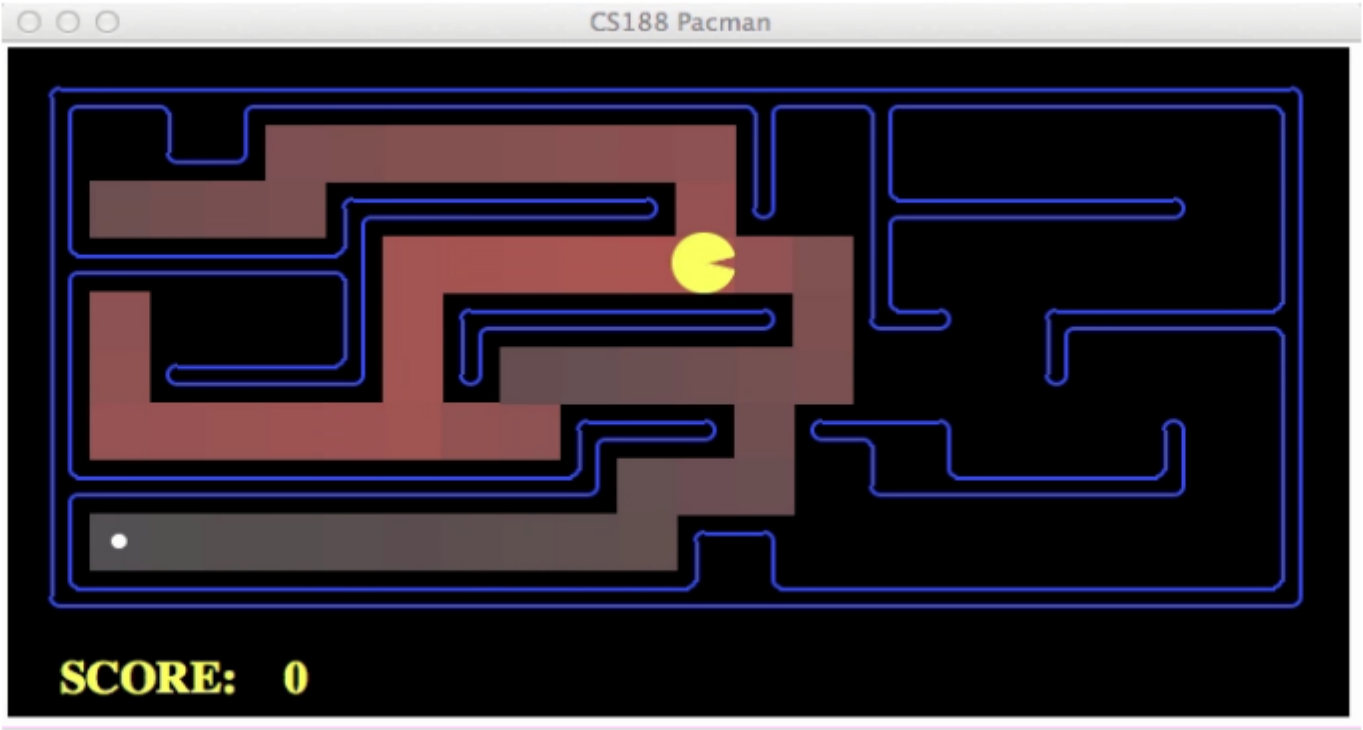

Comparison

Uniform Cost

A*

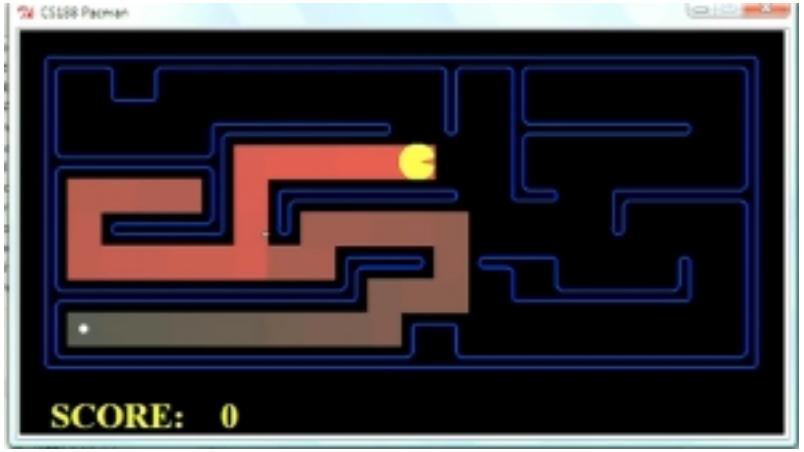

Greedy

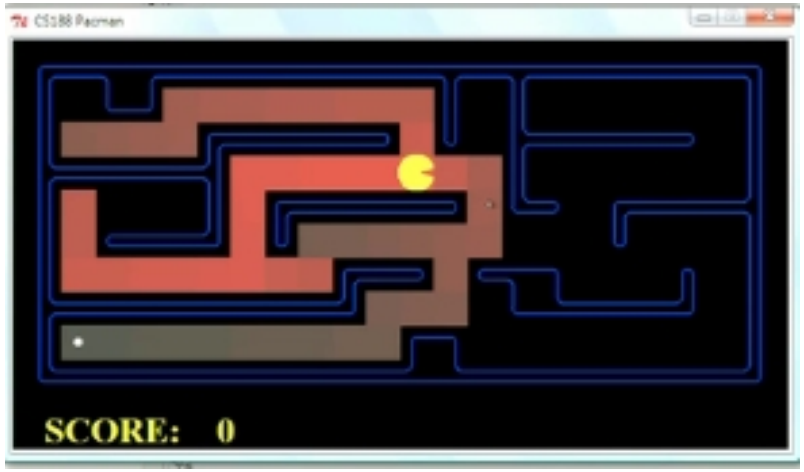

A* Applications

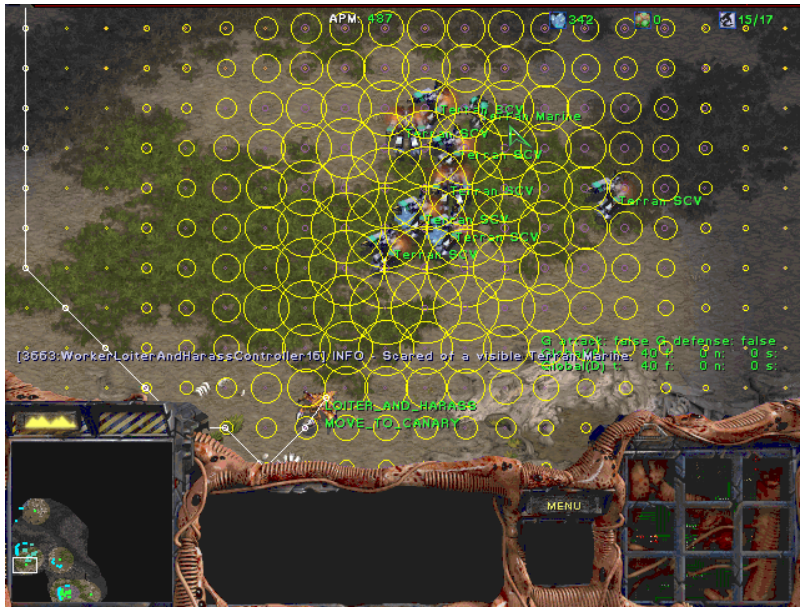

A* Applications

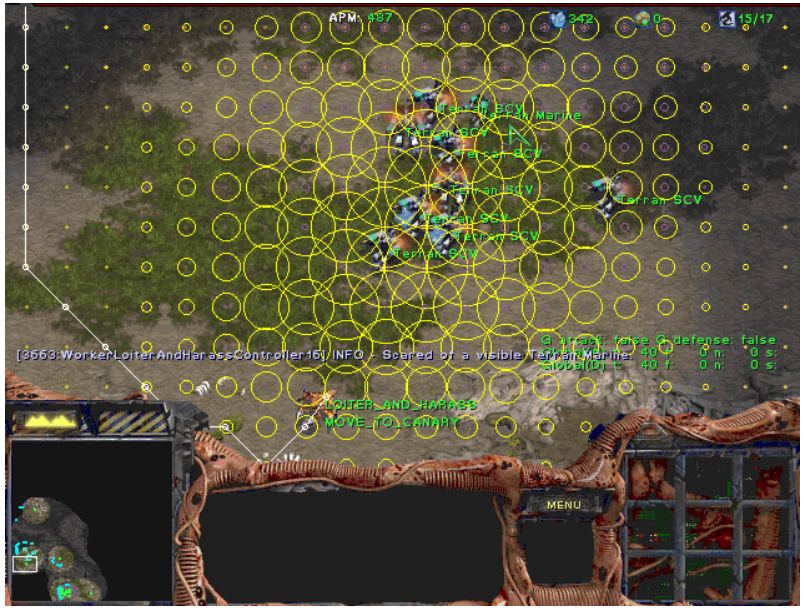

Video games
Pathing / routing problems
Resource planning problems
Robot motion planning
Language analysis
Machine translation
Speech recognition
[Demo: UCS / A * pacman tiny maze (L3D6,L3D7)]
[Demo: guess algorithm Empty Shallow/Deep (L3D8)]

Video of Demo Pacman (Tiny Maze) – UCS / A*

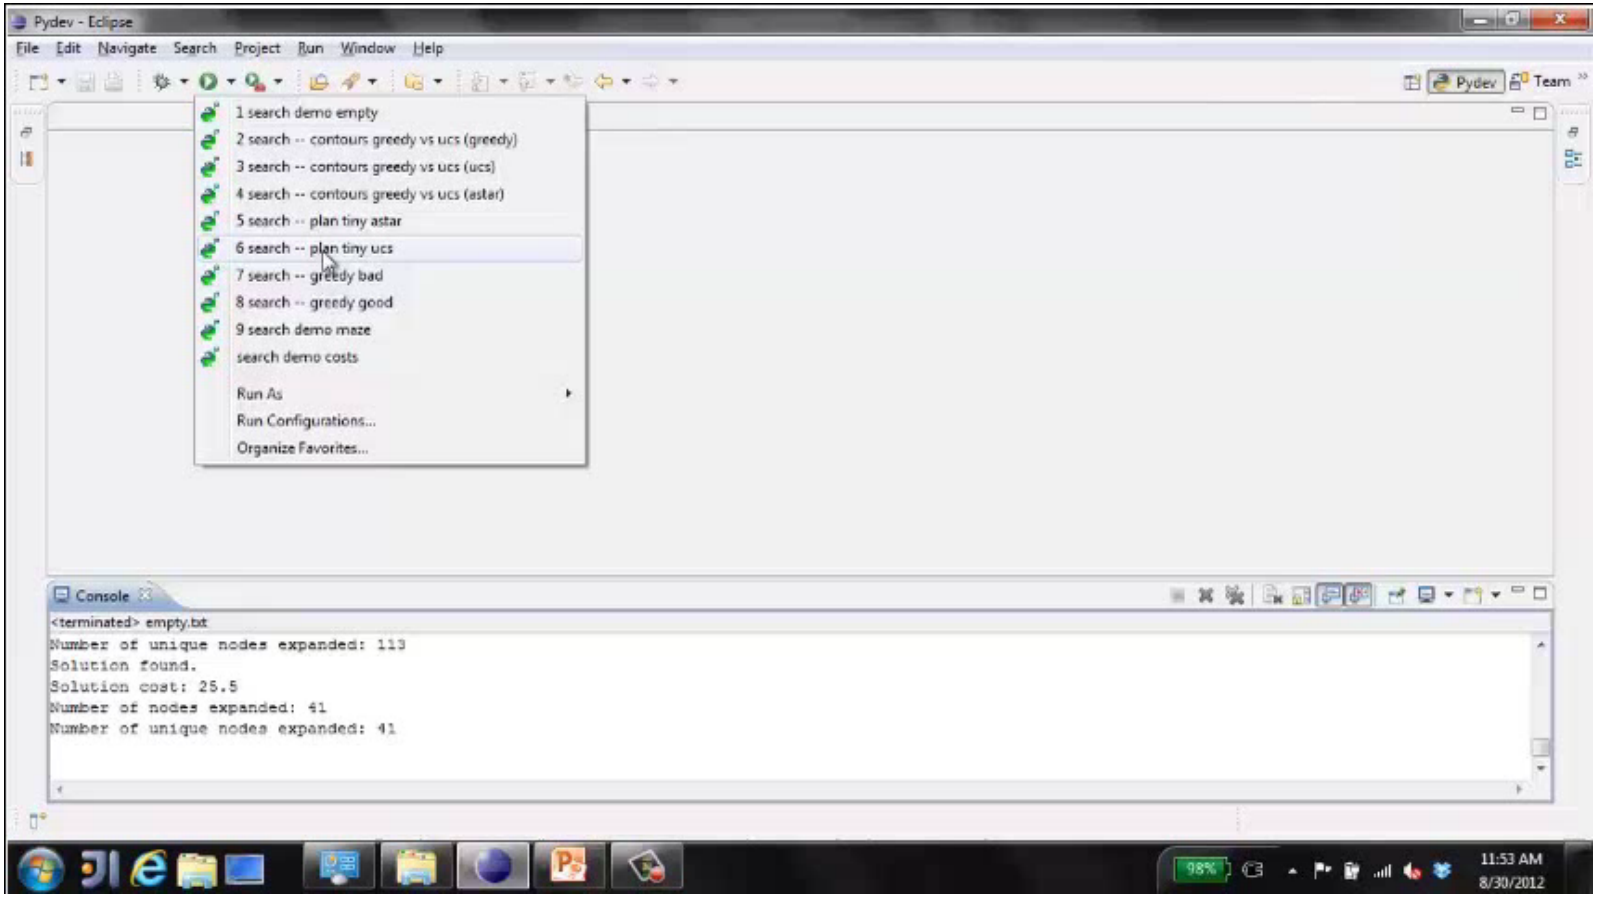

Video: Demo Water Shallow/Deep – Guess Algorithm

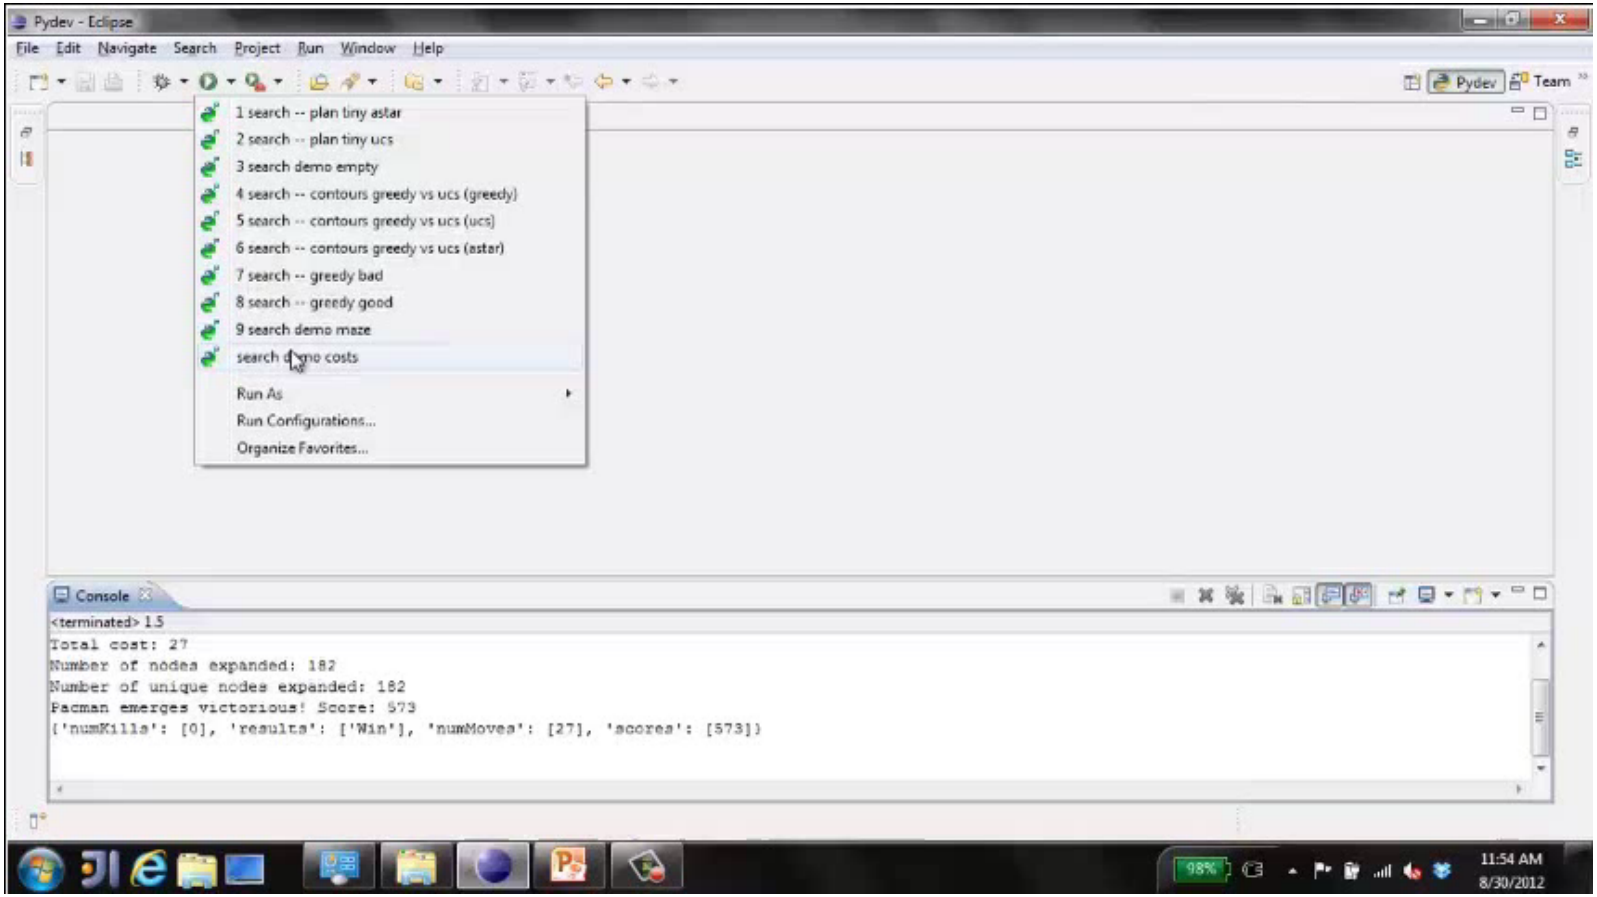

Creating Heuristics

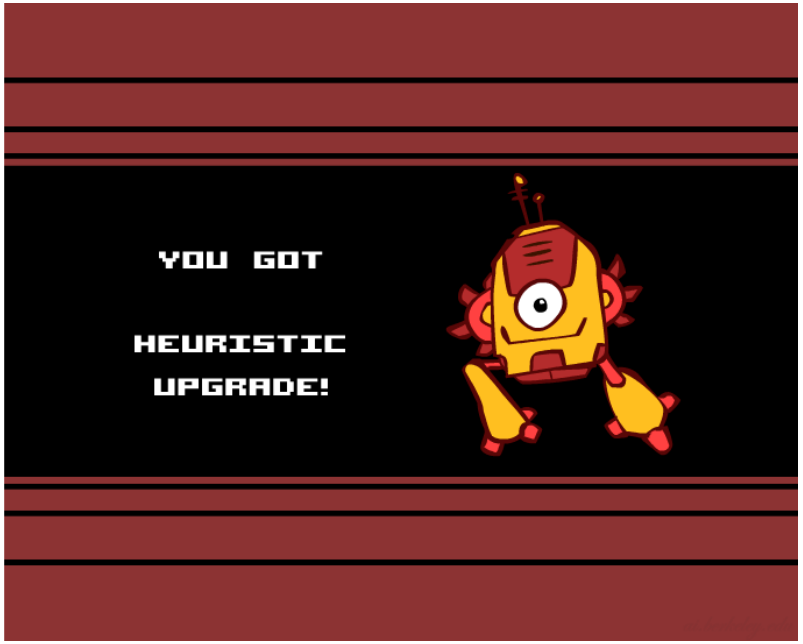

Creating Admissible Heuristics

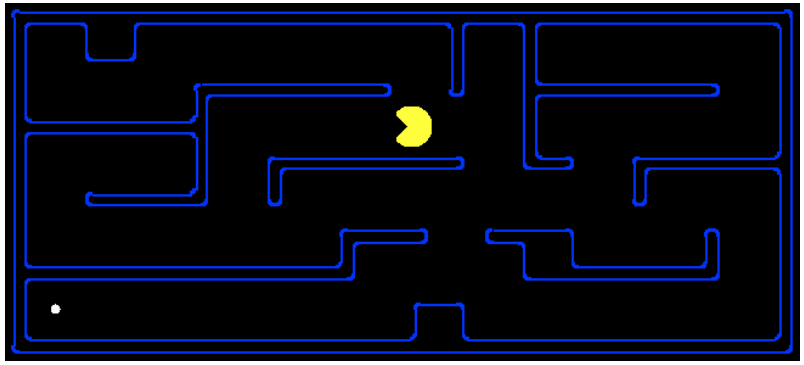

Manhattan Distance: 15

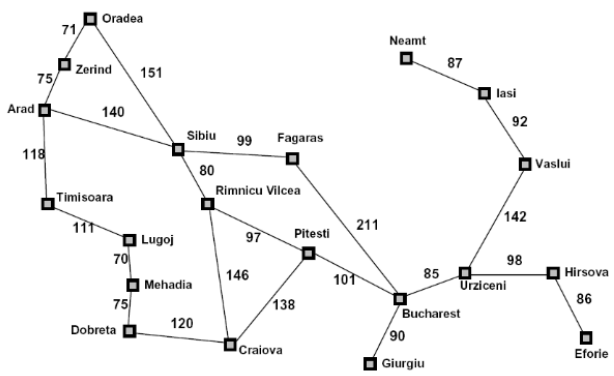

Straight−line distance to Bucharest	
Arad	366
Bucharest	0
Craiova	160
Dobreta	242
Eforie	161
Fagaras	178
Giurgiu	77
Hirsova	151
Iasi	226
Lugoj	244
Mehadia	241
Neamt	234
Oradea	380
Pitesti	98
Rimnicu Vilcea	193
Sibiu	253
Timisoara	329
Urziceni	80
Vaslui	199
Zerind	374

Straight Line Distance: 366

Most of the work in solving hard search problems optimally is in coming up with admissible heuristics

Often, admissible heuristics are solutions to *relaxed problems*, where new actions are available

Inadmissible heuristics are often useful too.

Example: 8 Puzzle

Start State

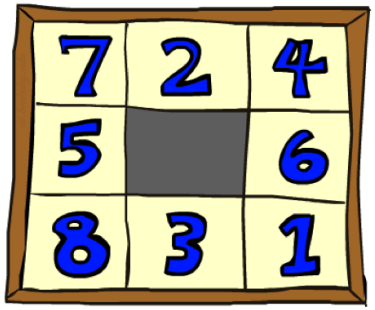

Goal State

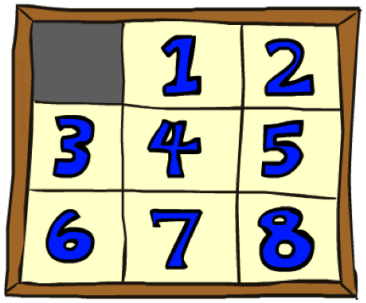

Actions



What are the states?

How many states?

What are the actions?

How many successors from the start state?

What should the costs be?

8 Puzzle I

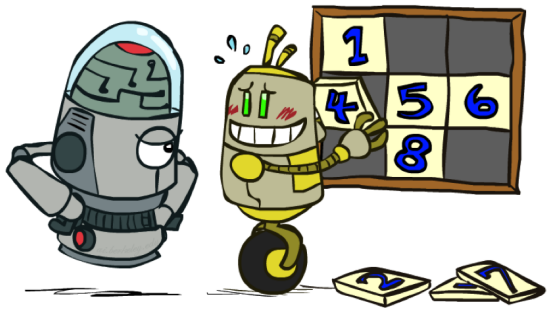

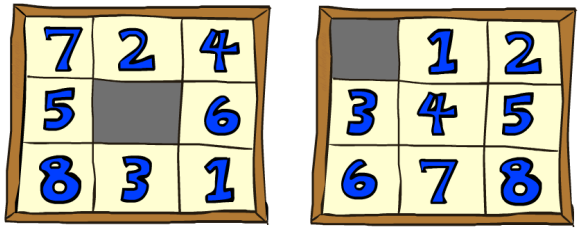

Heuristic: Number of tiles misplaced

Why is it admissible? h(start) =

This is a relaxed-problem heuristic

Average nodes expanded when the optimal path has

	4 steps	8 steps	12 steps.
UCS	112	6300	3.6×10^6
TILES	13	39	227

8 Puzzle II



Start State



Goal State

Easier 8-puzzle: tile could slide any direction at any time, ignoring other tiles.

Total Manhattan distance

Why is it admissible?

$h(start) = 3 + 1 + 2 + ... = 18.$

Average nodes expanded when the optimal path has:

	4 steps	8 steps	12 steps.
TILES	13	39	227
MANHATTAN	12	25	73

8 Puzzle III

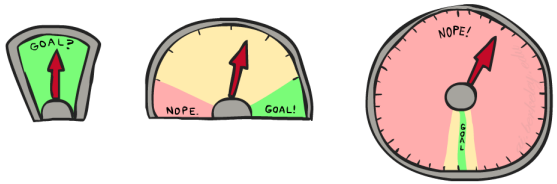

How about using the actual cost as a heuristic?

Would it be admissible?

Would we save on nodes expanded?

What's wrong with it?

With A*: a trade-off between quality of estimate and work per node

- As heuristics get closer to the true cost, expand fewer nodes, but more work per node to compute the heuristic itself.

Semi-Lattice of Heuristics

Trivial Heuristics, Dominance

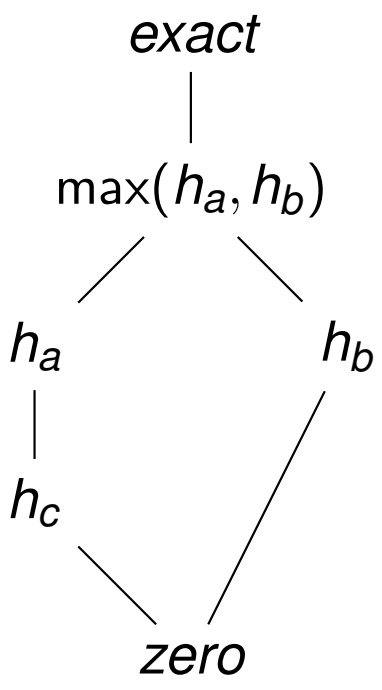

Dominance: $h_a \geq h_c$ if

$$\forall n : h_a(n) \geq h_c(n)$$

Heuristics form a semi-lattice:
  Max of admissible heuristics is admissible.

Trivial heuristics
  Bottom of lattice is the zero heuristic.
    (what does this give us?)
  Top of lattice is the exact heuristic

Graph Search

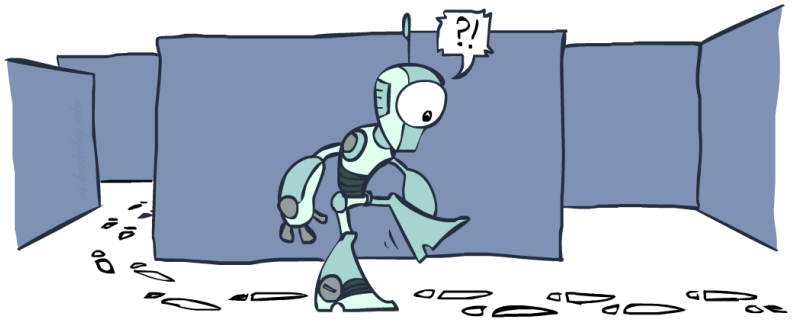

Tree Search: Extra Work!



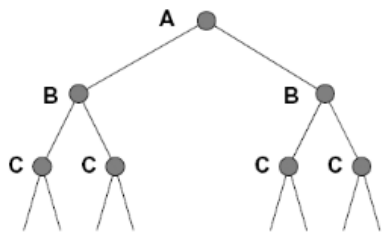

Search Tree
State Graph

Failure to detect repeated states can cause exponentially more work.

Graph Search

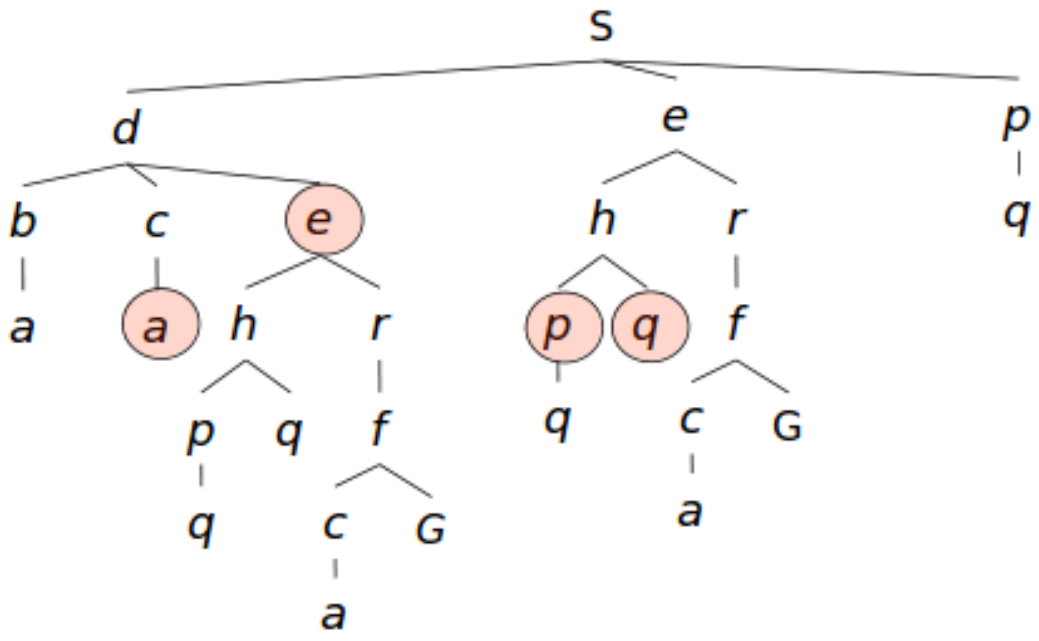

In BFS, for example, we shouldn't bother expanding the circled nodes (why?)

Graph Search

Idea: never expand a state twice

How to implement:

Tree search + set of expanded states ("closed set")
Expand the search tree node-by-node, but...
Before expanding a node,
check if state was never been expanded before
If yes skip it, else add to closed set and expand.

Important: store the closed set as a set, not a list

Can graph search wreck completeness? Why/why not?

How about optimality?

A* Graph Search Gone Wrong?

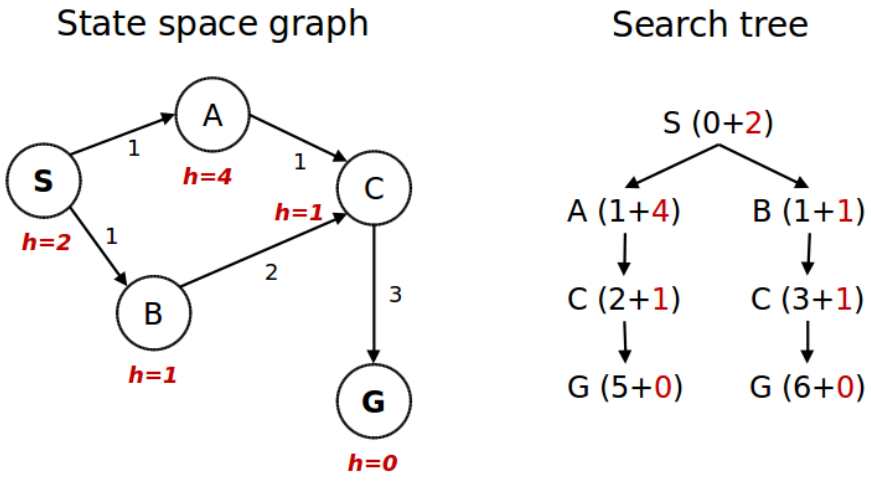

Is $h(\cdot)$ admissible? Yes.

Will exploring w.r..t $h(B)+g(n)$ be optimal?

Expand S.
  A and B in fringe!
  Expands B, since $h(B)+g(B)=2<5=h(A)+g(A)$.
  C in fringe with key, $3+h(C)=4$.
  G in fringe with key, 5.

Could have been there in 4.

Consistency of Heuristics

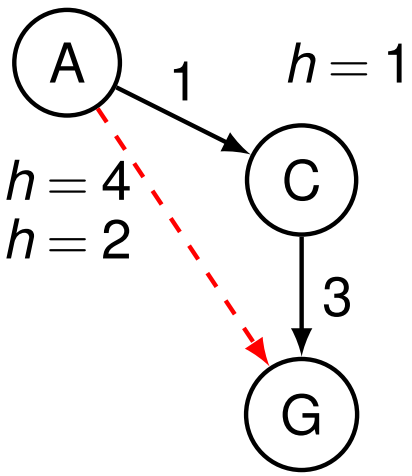

Main idea: est. heuristic costs $\leq$ actual costs

Admissibility: $h(x) \leq$ cost to goal.

Consistency: $h(x) - h(y) \leq cost(x, y)$.

heuristic "arc" cost $\leq$ actual arc cost

Consistent $\implies$ admissible? Yes? No?

Consistent: f value along a path never decreases

Admissible:

$f(C) = h(C) + 1 = 3$.

$f(A) = h(A) = 4$.

Consistent: $f(A) = 2 < 3 = f(C)$.

Claim: If y is expanded due to x, $f(y) \geq f(x)$.

Proof:

$$f(y) = g(x) + cost(x, y) + h(y)$$
$$\geq g(x) + h(x) - h(y) + h(y) = g(x) + h(x) = f(x) \qquad \square$$

The "estimate" of plan cost keeps rising as you progress.

Optimality of A* Graph Search

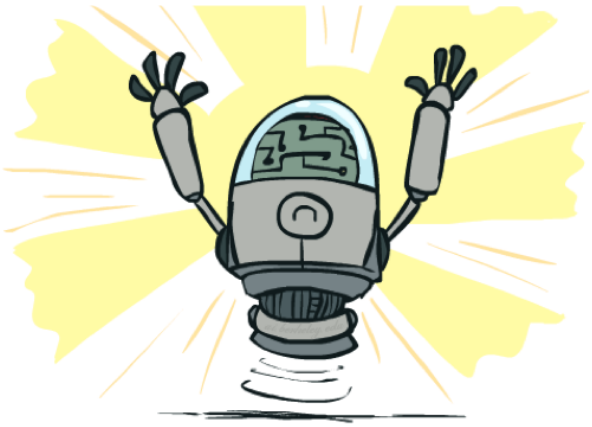

Optimality of A* Graph Search

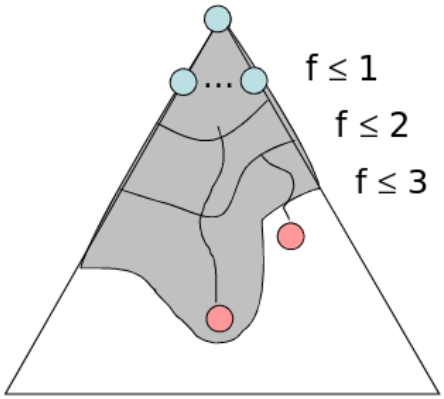

Sketch: consider what A* does with a consistent heuristic:

Fact 1: In tree search, A* expands nodes in increasing total f value (f-contours)

Fact 2: For every state *s*, the optimal path is discovered.

Result: A* graph search is optimal

Fact 1 Proof. Previous slide.

Proof of A* optimality.

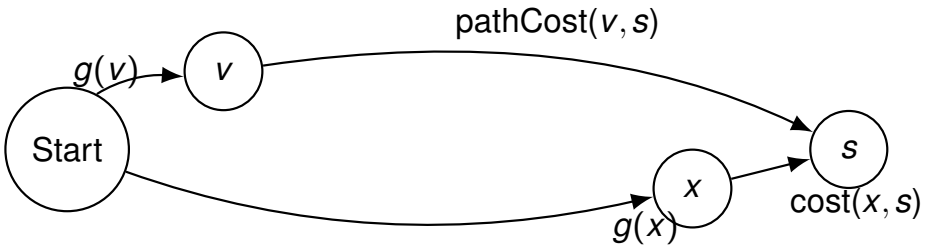

Fact 2: The optimal path is discovered to every state s.

Proof: Consider first error.
State s discovered from x.
Optimal path is from $y \neq x$.
There is a vertex v in the optimal path to y in fringe.
s in fringe with key $f(s) = g(x) + cost(x, s) + h(s)$.
v in fringe with key $f(v) = g(v) + h(v)$.
$h(v) - h(s) \leq pathCost(v, s)$ by induction.
$g(v) + pathCost(v, s) < g(x) + cost(x, s)$
$\implies f(v) < f(s)$.
But then v would have been expanded before s! $\square$

Optimality

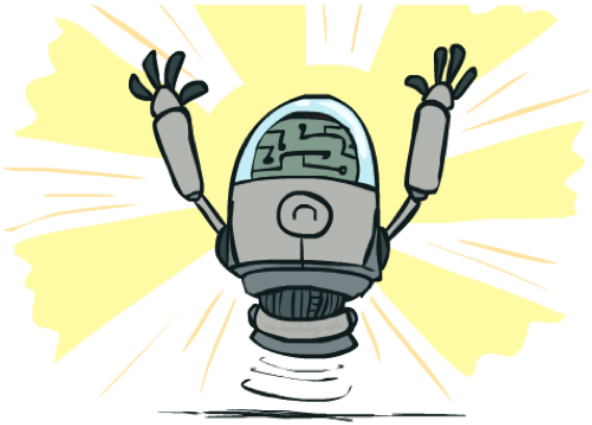

Tree search:
- A* is optimal if heuristic is admissible.
- UCS is a special case (h = 0)

Graph search:
- A* optimal if heuristic is consistent
- UCS optimal (h = 0 is consistent)

Consistency implies admissibility

In general, most natural admissible heuristics tend to be consistent, especially if from relaxed problems

A*: Summary

A*: Summary

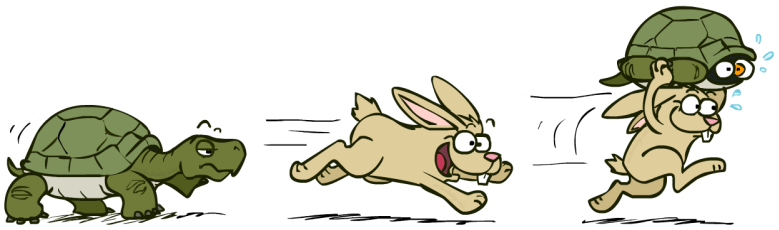

A* uses both backward costs and (estimates of) forward costs

A* is optimal with admissible / consistent heuristics

Heuristic design is key: often use relaxed problems

Tree Search Pseudo-Code

```
function TREE-SEARCH(problem, fringe) return a solution, or failure
    fringe ← INSERT(MAKE-NODE(INITIAL-STATE[problem]), fringe)
    loop do
        if fringe is empty then return failure
        node ← REMOVE-FRONT(fringe)
        if GOAL-TEST(problem, STATE[node]) then return node
        for child-node in EXPAND(STATE[node], problem) do
            fringe ← INSERT(child-node, fringe)
        end
    end
```

Graph Search Pseudo-Code

```
function GRAPH-SEARCH(problem, fringe) return a solution, or failure
    closed ← an empty set
    fringe ← INSERT(MAKE-NODE(INITIAL-STATE[problem]), fringe)
    loop do
        if fringe is empty then return failure
        node ← REMOVE-FRONT(fringe)
        if GOAL-TEST(problem, STATE[node]) then return node
        if STATE[node] is not in closed then
            add STATE[node] to closed
            for child-node in EXPAND(STATE[node], problem) do
                fringe ← INSERT(child-node, fringe)
            end
    end
```

Yaay!