

## 61A Lecture 24

---

## Announcements

Scheme

## Scheme is a Dialect of Lisp

---

What are people saying about Lisp?

- "If you don't know Lisp, you don't know what it means for a programming language to be powerful and elegant."
  - Richard Stallman, created Emacs & the first free variant of UNIX
- "The only computer language that is beautiful."
  - Neal Stephenson, DeNero's favorite sci-fi author
- "The greatest single programming language ever designed."
  - Alan Kay, co-inventor of Smalltalk and OOP (from the user interface video)

## Scheme Values

---

Scheme values include (among others):

### ATOMS

- Numbers (in our dialect, integers and floating-point values).
- Booleans
- Symbols (much like strings, but with equal strings being the same object).
- The value nil (like Python None).
- Functions.

### COMPOSITE VALUES

- Pairs (like two-element Python lists).
- Scheme lists formed from pairs and nil, as for our linked lists.

## Big Idea: Scheme Programs Are Scheme Values

---

Numbers and nil represent literals.

Symbols represent variables.

Lists (formed from pairs) represent everything else.

Since Scheme programs compute Scheme values, they can construct Scheme programs as well.

## Scheme Expressions

Scheme programs consist of expressions, which can be:

- Primitive expressions: 2 3.3 true + quotient
- Combinations: (quotient 10 2) (not true)

Numbers are self-evaluating; symbols are bound to values

Call expressions include an operator and 0 or more operands in parentheses

```
> (quotient 10 2)
5
> (quotient (+ 8 7) 5)
3
> (+ (* 3
      (+ (* 2 4)
          (+ 3 5)))
      (+ (- 10 7)
          6))
```

“quotient” names Scheme’s built-in integer division procedure (i.e., function)

Combinations can span multiple lines (spacing doesn’t matter)

(Demo)

## Special Forms



## Special Forms

A combination that is not a call expression is a special form:

- **if** expression: (if <predicate> <consequent> <alternative>)
- **and** and **or**: (and <e1> ... <en>), (or <e1> ... <en>)
- Binding symbols: (define <symbol> <expression>)
- New procedures: (define (<symbol> <formal parameters>) <body>)

Evaluation:  
(1) Evaluate the predicate expression  
(2) Evaluate either the consequent or alternative

```
> (define pi 3.14)
> (* pi 2)
6.28
```

The symbol "pi" is bound to 3.14 in the global frame

```
> (define (abs x)
  (if (< x 0)
      (- x)
      x))
> (abs -3)
3
```

A procedure is created and bound to the symbol "abs"

(Demo)

# Scheme Interpreters

(Demo)


# Lambda Expressions

## Lambda Expressions

---

Lambda expressions evaluate to anonymous procedures

```
(lambda (<formal-parameters>) <body>)
```

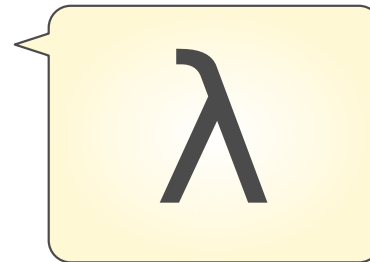

Two equivalent expressions:

```
(define (plus4 x) (+ x 4))
```

```
(define plus4 (lambda (x) (+ x 4)))
```

An operator can be a call expression too:

```
((lambda (x y z) (+ x y (square z))) 1 2 3) ► 12
```


Evaluates to the  
 $x+y+z^2$  procedure

## Pairs and Lists

## Pairs and Lists

In the late 1950s, computer scientists used confusing names

- **cons**: Two-argument procedure that creates a pair
- **car**: Procedure that returns the first element of a pair
- **cdr**: Procedure that returns the second element of a pair
- **nil**: The empty list
- A (non-empty) list in Scheme is a pair in which the second element is **nil** or a Scheme list
- **Important!** Scheme lists are written in parentheses separated by spaces
- A dotted list has some value for the second element of the last pair that is not a list

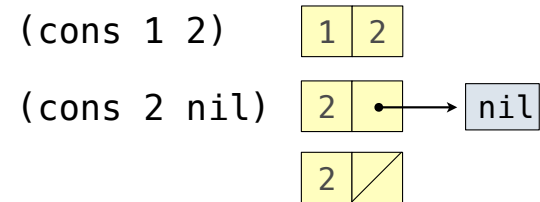

```
> (cons 1 (cons 2 nil))
```

```
(1 2)
```

```
> (define x (cons 1 2))
```

```
> x
```

```
(1 . 2)
```

```
> (car x)
```



```
1
```

```
> (cdr x)
```

```
2
```

```
> (cons 1 (cons 2 (cons 3 (cons 4 nil))))
```

```
(1 2 3 4)
```



Not a well-formed list!

(Demo)

# Symbolic Programming

## Symbolic Programming

---

Symbols normally refer to values; how do we refer to symbols?

```
> (define a 1)
> (define b 2)
> (list a b)
(1 2)
```

No sign of "a" and "b" in the resulting value

Quotation is used to refer to symbols directly in Lisp.

```
> (list 'a 'b)
(a b)
> (list 'a b)
(a 2)
```

Short for (quote a), (quote b):  
Special form to indicate that the symbol itself is the value.

Quotation can also be applied to combinations to form lists.


```
> (car '(a b c))
a
> (cdr '(a b c))
(b c)
```



## Scheme Lists and Quotation


Dots can be used in a quoted list to specify the second element of the final pair.

```
> (cdr (cdr '(1 2 . 3)))  
3
```



However, dots appear in the output only of ill-formed lists.

```
> '(1 2 . 3)  
(1 2 . 3)  
> '(1 2 . (3 4))  
(1 2 3 4)  
> '(1 2 3 . nil)  
(1 2 3)
```

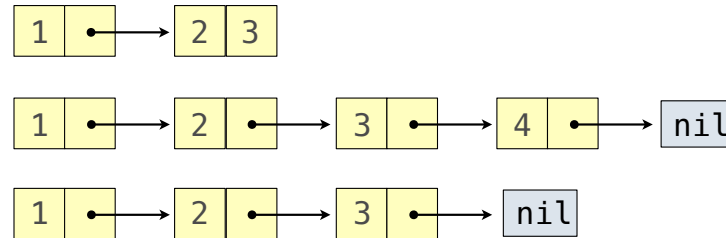

What is the printed result of evaluating this expression?

```
> (cdr '((1 2) . (3 4 . (5))))  
(3 4 5)
```

