

Higher-Order Environments

Announcements

Environments for Higher-Order Functions

(Demo)

Names can be Bound to Functional Arguments

```
1 def apply_twice(f, x):  
2     return f(f(x))  
3  
→ 4 def square(x):  
5     return x * x  
6  
→ 7 result = apply_twice(square, 2)
```

Global frame
apply_twice
square

func apply_twice(f, x) [parent=Global]

func square(x) [parent=Global]

Applying a user-defined function:

- Create a new frame
- Bind formal parameters (f & x) to arguments
- Execute the body:
return f(f(x))

```
→ 1 def apply_twice(f, x):  
→ 2     return f(f(x))  
3  
4 def square(x):  
5     return x * x  
6  
7 result = apply_twice(square, 2)
```

2 Global frame

1 f1: apply_twice [parent=Global]

apply_twice
square

func apply_twice(f, x) [parent=Global]

func square(x) [parent=Global]

f
x 2

Types of Higher-Order Functions

Environments Enable Higher-Order Functions

Functions are first-class: Functions are values in our programming language

Higher-order function: A function that takes a function as an argument value **or**
A function that returns a function as a return value

(Demo)

Functions as Return Values

Locally Defined Functions

Functions defined within other function bodies are bound to names in a local frame

A function that
returns a function


```
def make_adder(n):  
    """Return a function that takes one argument k and returns k + n.  
  
    >>> add_three = make_adder(3)  
    >>> add_three(4)  
    7  
    """  
    def adder(k):  
        return k + n  
    return adder
```

The name add_three is bound
to a function

A def statement within
another def statement

Can refer to names in the
enclosing function


Call Expressions as Operator Expressions

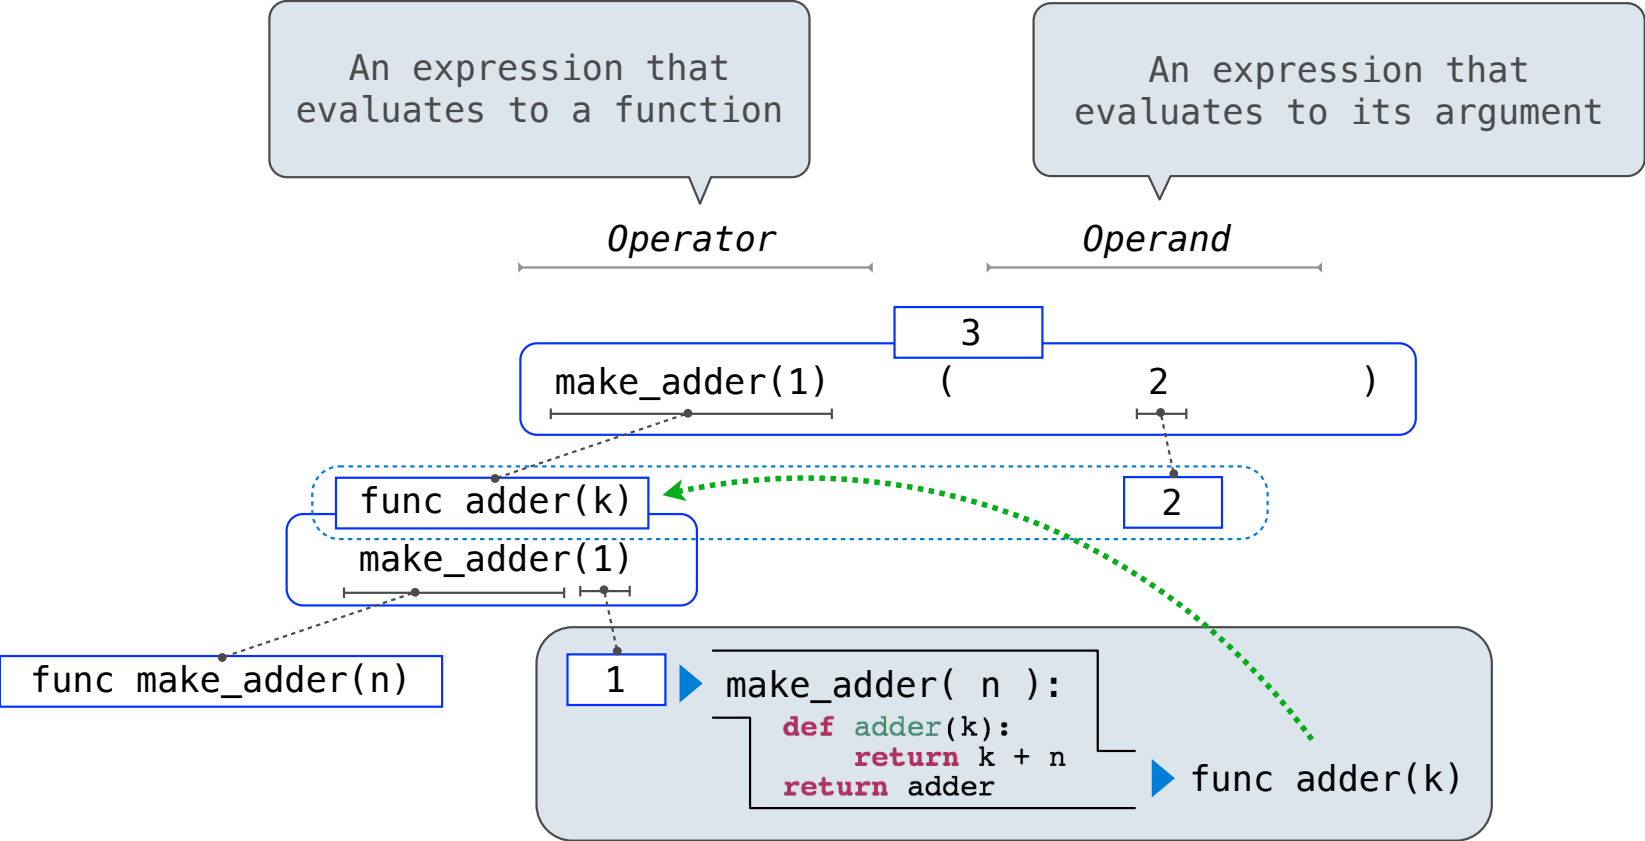

Environments for Nested Definitions

(Demo)

Environment Diagrams for Nested Def Statements

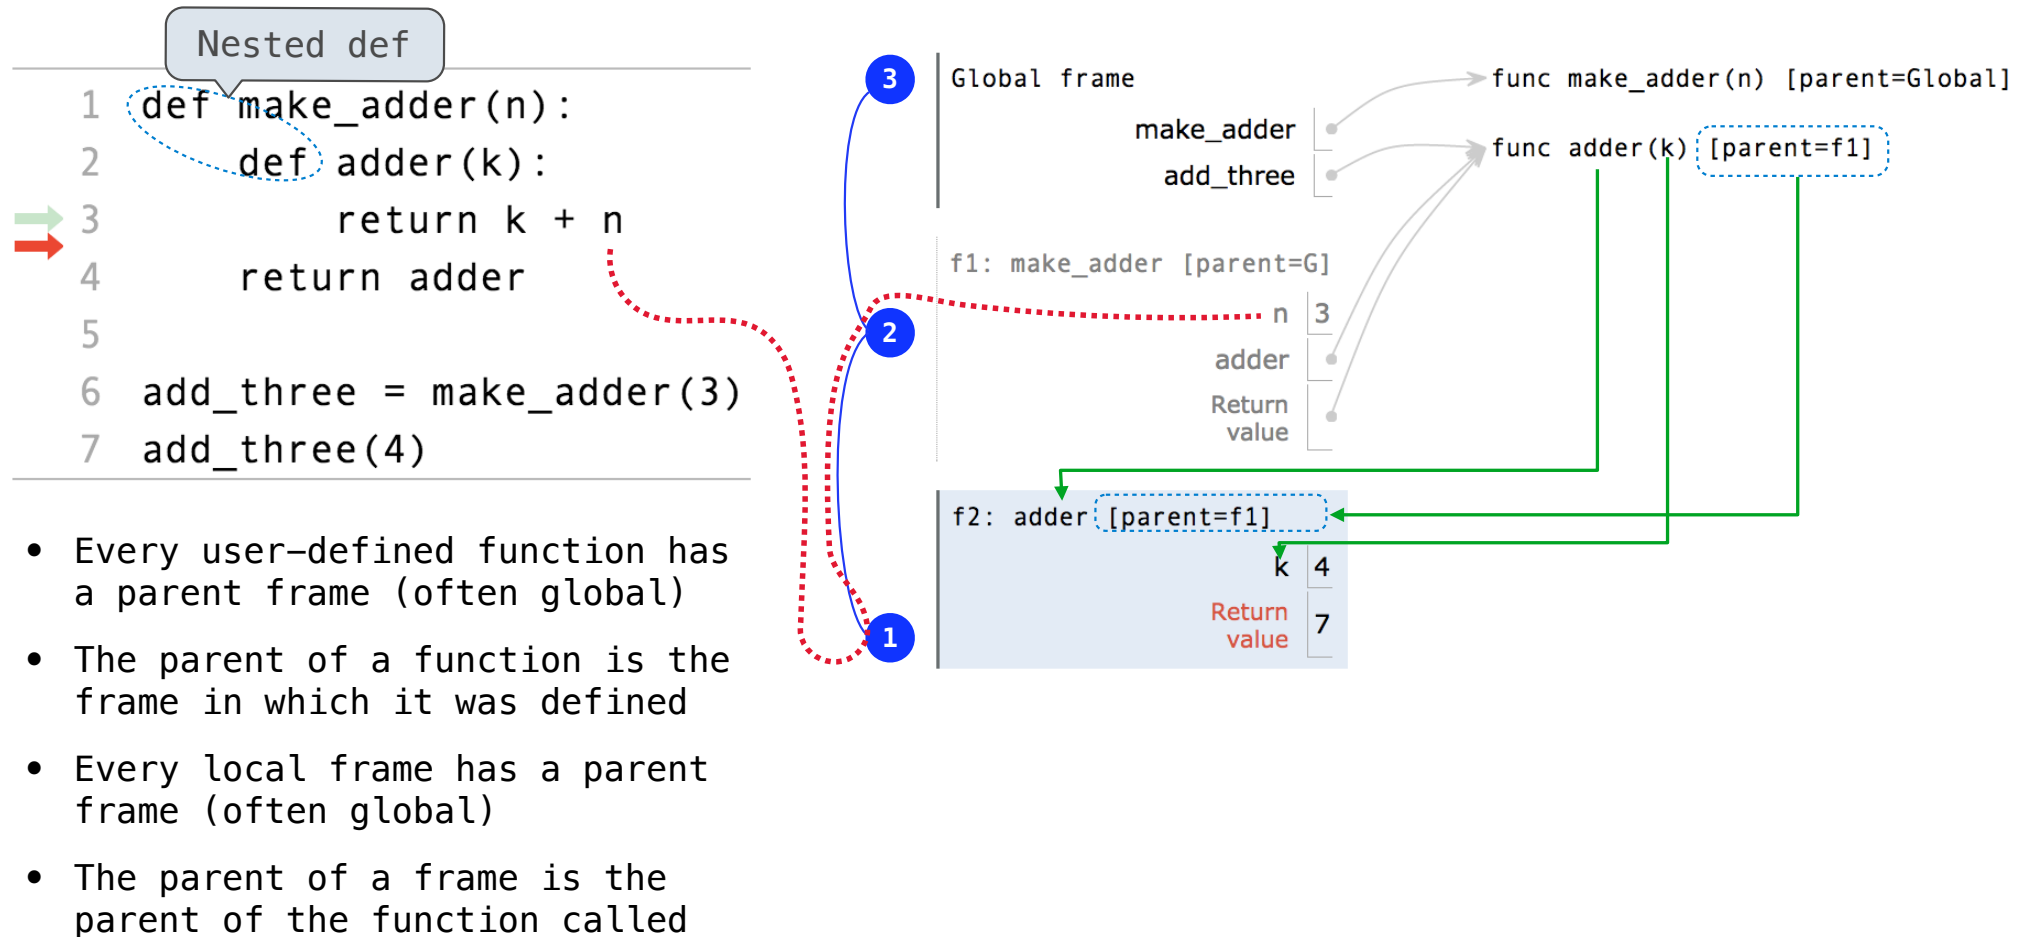

How to Draw an Environment Diagram

When a function is defined:

Create a function value: `func <name>(<formal parameters>) [parent=<label>]`

Its parent is the current frame.

f1: make_adder func adder(k) [parent=f1]

Bind <name> to the function value in the current frame

When a function is called:

1. Add a local frame, titled with the <name> of the function being called.
- ★ 2. Copy the parent of the function to the local frame: [parent=<label>]
3. Bind the <formal parameters> to the arguments in the local frame.
4. Execute the body of the function in the environment that starts with the local frame.

Local Names

(Demo)

Function Composition

(Demo)


The Environment Diagram for Function Composition

```

1 def square(x):
2     return x * x
3
4 def make_adder(n):
5     def adder(k):
6         return k + n
7     return adder
8
9 def compose1(f, g):
10    def h(x):
11        return f(g(x))
12    return h
13
14 compose1(square, make_adder(2))(3)

```

Return value of make_adder is an argument to compose1

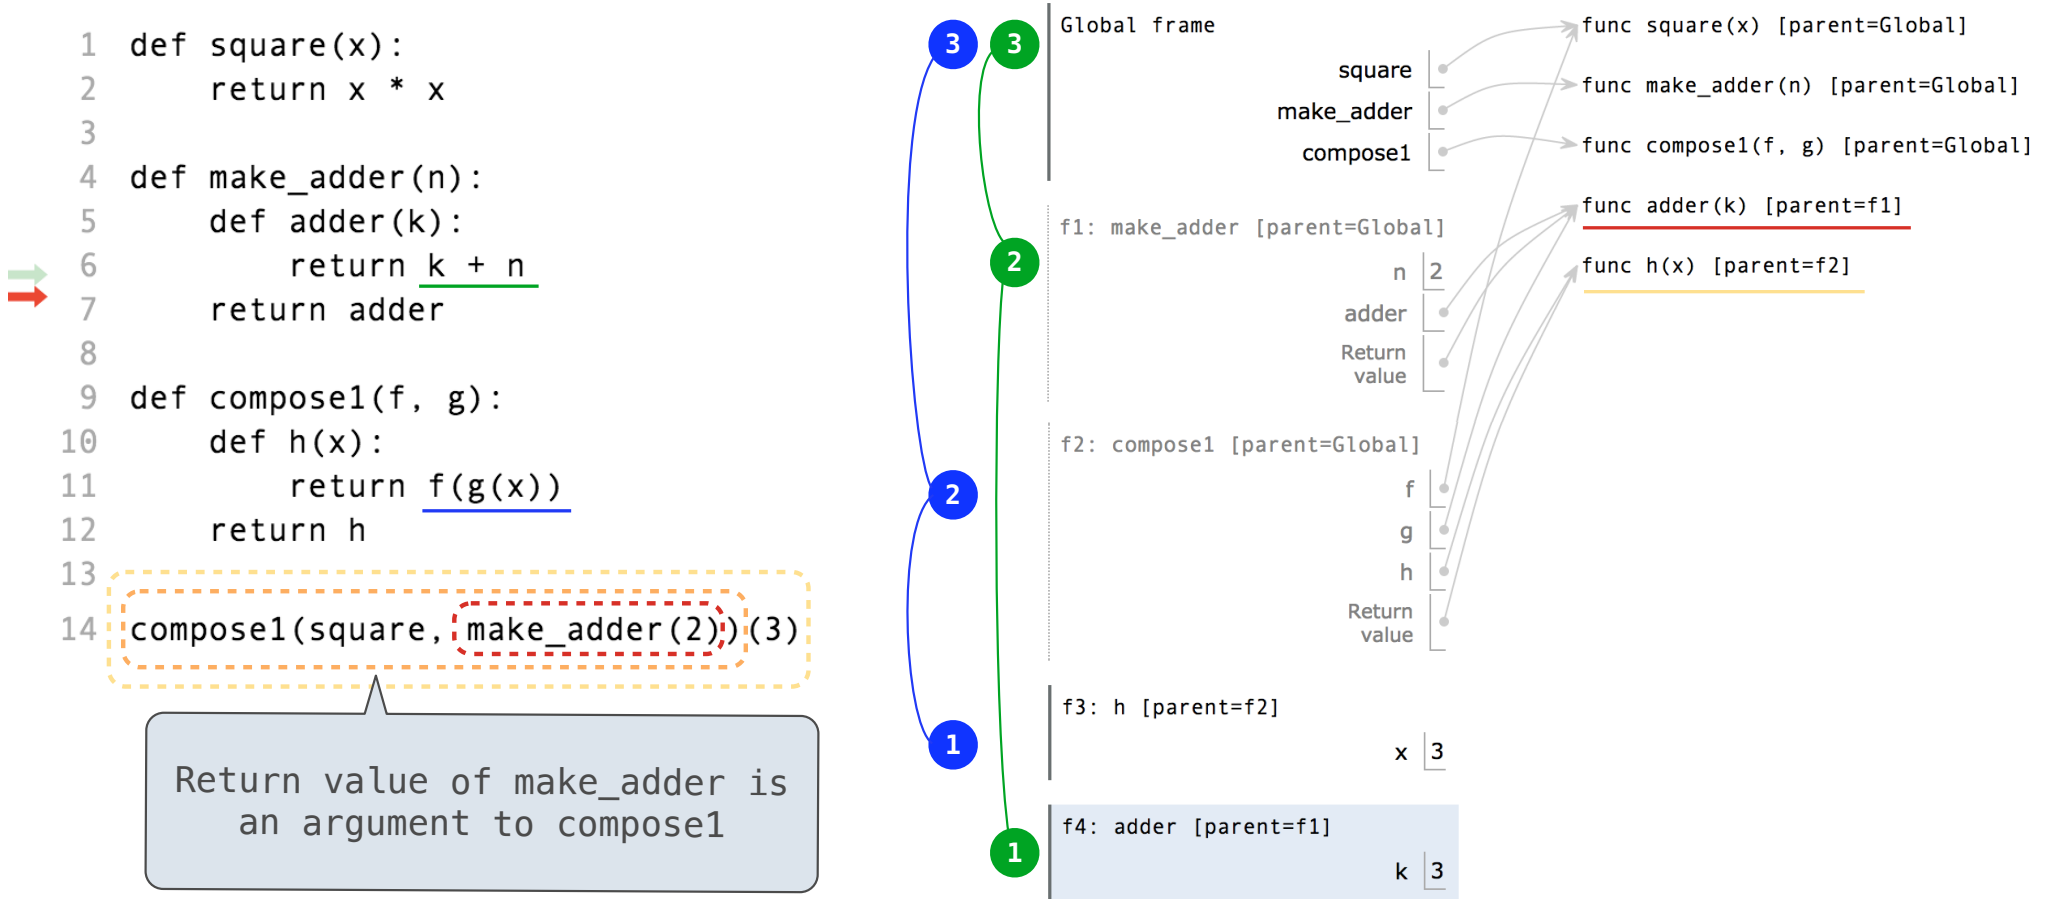

Lambda Expressions

(Demo)

Lambda Expressions

```
>>> x = 10
```

An expression: this one evaluates to a number

```
>>> square = x * x
```

Also an expression: evaluates to a function

```
>>> square = lambda x: x * x
```

Important: No "return" keyword!

A function

with formal parameter x

that returns the value of 'x * x'

```
>>> square(4)
16
```

Must be a single expression

Lambda expressions are not common in Python, but important in general

Lambda expressions in Python cannot contain statements at all!

Lambda Expressions Versus Def Statements



square = lambda x: x * x

VS



def square(x):
 return x * x

- Both create a function with the same domain, range, and behavior.
- Both bind that function to the name square.
- Only the def statement gives the function an intrinsic name, which shows up in environment diagrams but doesn't affect execution (unless the function is printed).

