


## CS 61C Fall 2014 – Discussion 5 – Direct Mapped Caches

In the following diagram, each block represents 8 bits (1 byte) of data. Our memory is **byte-addressed**, meaning that there is one address for each byte. Compare this to **word-addressed**, which means that there is one address for each word.

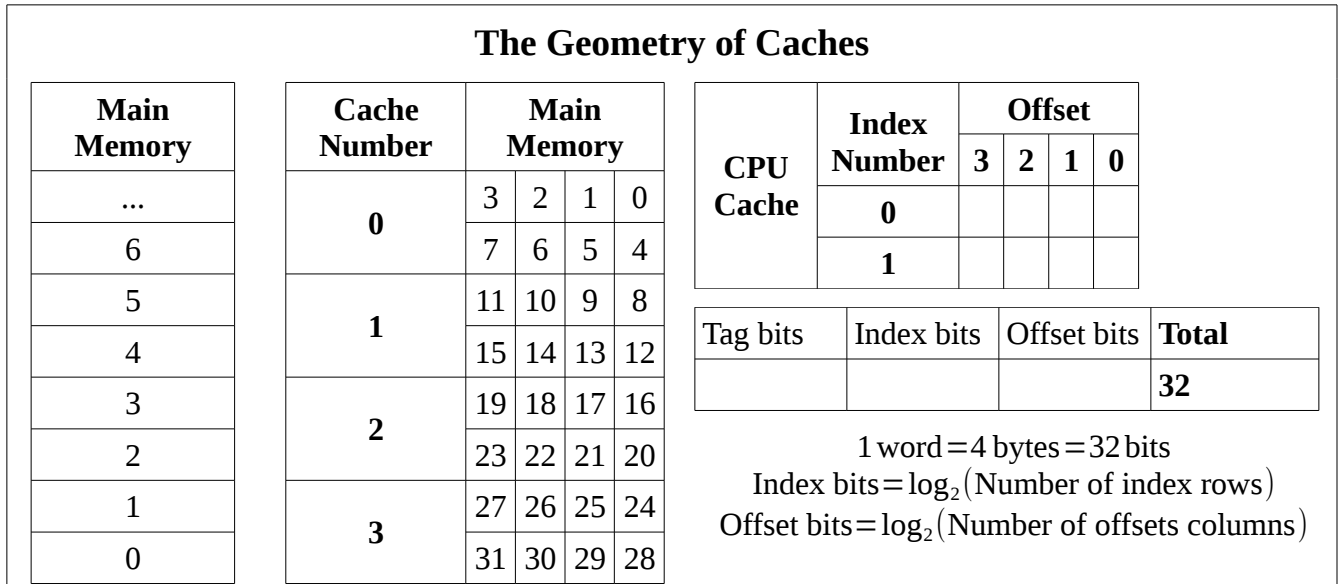

### 1. Direct mapped caches

1. How many bytes of data can our cache hold? \_\_\_\_\_ How many words? \_\_\_\_\_
2. Fill in the “Tag bits, Index bits, Offset bits” with the correct T:I:O breakdown according to the diagram.
3. Let’s say we have a 8192KiB cache with an 128B block size, what is the tag, index, and offset of 0xFEEDF00D?

FE	ED	F0	0D
1111 1110	1110 1101	1111 0000	0000 1101

Tag: \_\_\_\_\_ Index: \_\_\_\_\_ Offset: \_\_\_\_\_

4. Fill in the table below. Assume we have a write-through cache, so the number of bits per row includes only the cache data, the tag, and the valid bit.

Address size (bits)	Cache size	Block size	Tag bits	Index bits	Offset bits	Bits per row
16	4KiB	4B				
32	32KiB	16B				
32			16	12		
64	2048KiB			14		1068

## 2. Cache hits and misses

Assume we have the following cache. Classify each of the following byte memory accesses as a cache hit (H), cache miss (M), or cache miss with replacement (R).

CPU Cache	Index Number	Offset							
		7	6	5	4	3	2	1	0
	0								
	1								
	2								
	3								

1. 0x00000004
2. 0x00000005
3. 0x00000068
4. 0x000000C8
5. 0x000000DD
6. 0x00000045
7. 0x00000004
8. 0x000000C8

**Self check:** Of the 32 bits in each address, which bits do we use to find the row of the cache to use?

## 3. Analyzing C Code

```
#define NUM_INTS 8192
int A[NUM_INTS]; /** A lives at 0x100000 */
int i, total = 0;
for (i = 0; i < NUM_INTS; i += 128) { A[i] = i; } /** Line 1 */
for (i = 0; i < NUM_INTS; i += 128) { total += A[i]; } /** Line 2 */
```

Let's say you have a byte-addressed computer with a total address space of 1MiB. It features a 16KiB CPU cache with 1KiB blocks.

1. How many bits make up a memory address on this computer? \_\_\_\_\_
2. What is the T:I:O breakdown? \_\_\_\_\_ tag bits \_\_\_\_\_ index bits \_\_\_\_\_ offset bits
3. Calculate the cache hit rate for the line marked Line 1: \_\_\_\_\_
4. Calculate the cache hit rate for the line marked Line 2: \_\_\_\_\_

## 4. Average Memory Access Time

AMAT is the average (expected) time it takes for memory access. It can be calculated using this formula:

$$\text{AMAT} = \text{hit time} + \text{miss rate} \times \text{miss penalty}$$

Remember that the miss penalty is the *additional* time it takes for memory access in the event of a cache miss. Therefore, a cache miss takes  $\text{hit time} + \text{miss penalty}$  time.

1. Suppose that you have a cache system with the following properties. What is the AMAT?
  - a) L1\$ hits in 1 cycle (local miss rate 25%)
  - b) L2\$ hits in 10 cycles (local miss rate 40%)
  - c) L3\$ hits in 50 cycles (global miss rate 6%)
  - d) Main memory hits in 100 cycles (always hits)